

A minimalist graphic for a track lighting system. It features a black L-shaped track. The vertical section on the left has two clusters of small white dots, representing lights. The horizontal section at the bottom has two black cylindrical light fixtures mounted on it, and a white rectangular segment further to the right. The text 'ALPANI' is centered in the upper half, with '48V', 'LOW VOLTAGE', and 'TRACK SYSTEM' stacked below it.

ALPANI

48V
LOW VOLTAGE
TRACK SYSTEM

ALPANI

**YOUR RELIABLE PARTNER IN
INNOVATIVE LIGHTING SOLUTIONS**

Deka Maxi - 10518

48V

ALPANI



Deka family of spots are ready for the perfect solution to your lighting needs with different power and different dimensions.



Materials

Housing made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000 and 4000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White and Black
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

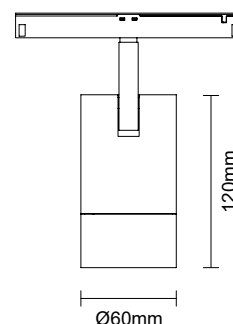

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

48V Low Voltage Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10518	18W - 1665lm	80	2700	15°	White	On-Off
		90	3000	24°	Black	Dali
			4000	36°		
				60°		

*Calculated with CRI80 - 4000K

Deka Midi - 10516

48V

ALPANI



Deka family of spots are ready for the perfect solution to your lighting needs with different power and different dimensions.



Materials

Housing made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000 and 4000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White and Black
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

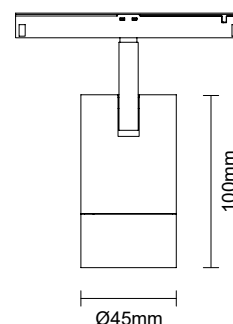

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

48V Low Voltage Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10516	10W - 925lm	80	2700	15°	White	On-Off
		90	3000	24°	Black	Dali
			4000	36°		
				60°		

*Calculated with CRI80 - 4000K

Deka Mini - 10514

48V

ALPANI



Deka family of spots are ready for the perfect solution to your lighting needs with different power and different dimensions.



Materials

Housing made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000 and 4000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White and Black
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

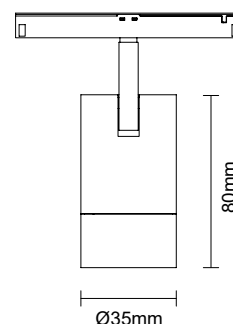

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

48V Low Voltage Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10514	6W - 555lm	80	2700	15°	White	On-Off
		90	3000	24°	Black	Dali
			4000	36°		
				60°		


*Calculated with CRI80 - 4000K



Abaka Maxi - 10527

48V

ALPANI

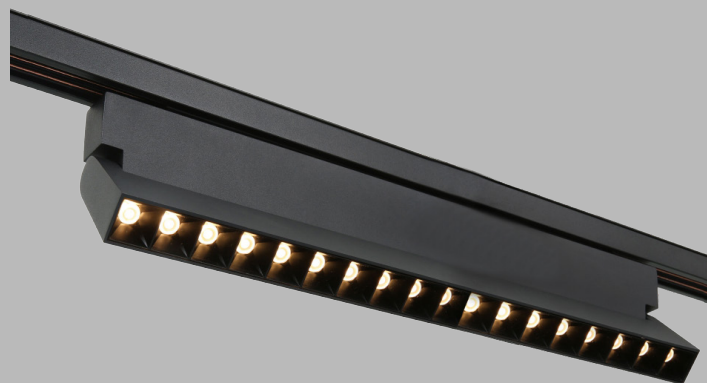

Abaka family provides excellent flexibility with its movable body.



Materials

Housing made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000 and 4000K

Beam Angle

High efficient optic medium distribution


Colors

As standard; White and Black
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

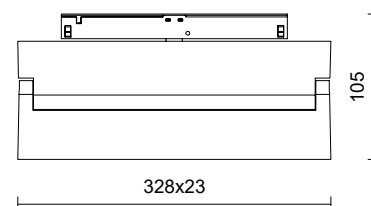

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

48V Low Voltage Track


Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10527	18W - 1665lm	80	2700	24°	White	On-Off
		90	3000		Black	Dali
			4000			

*Calculated with CRI80 - 4000K

Abaka Midi - 10525

48V

ALPANI

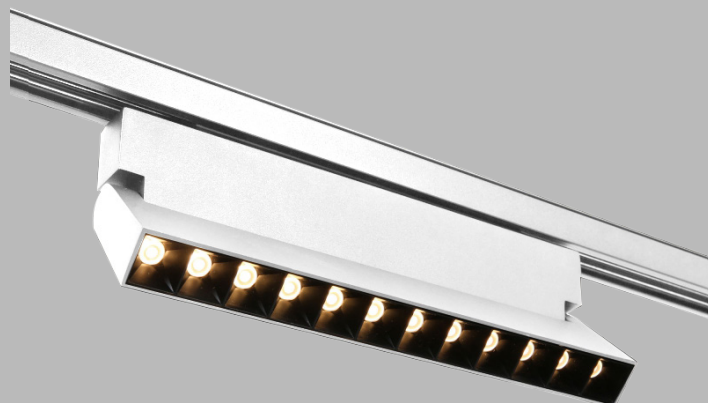

Abaka family provides excellent flexibility with its movable body.



Materials

Housing made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000 and 4000K

Beam Angle

High efficient optic medium distribution


Colors

As standard; White and Black
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

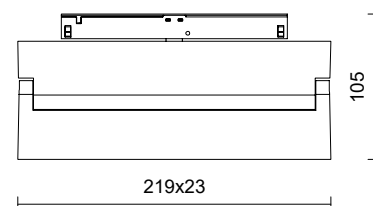

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

48V Low Voltage Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10525	12W - 1110lm	80	2700	24°	White	On-Off
		90	3000		Black	Dali
			4000			

*Calculated with CRI80 - 4000K

Abaka Mini - 10523

48V

ALPANI



Abaka family provides excellent flexibility with its movable body.



Materials

Housing made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000 and 4000K

Beam Angle

High efficient optic medium distribution


Colors

As standard; White and Black
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

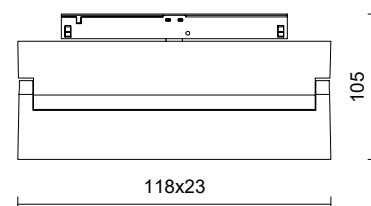

Warranty


All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

48V Low Voltage Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10523	6W - 555lm	80	2700	24°	White	On-Off
		90	3000		Black	Dali
			4000			

*Calculated with CRI80 - 4000K

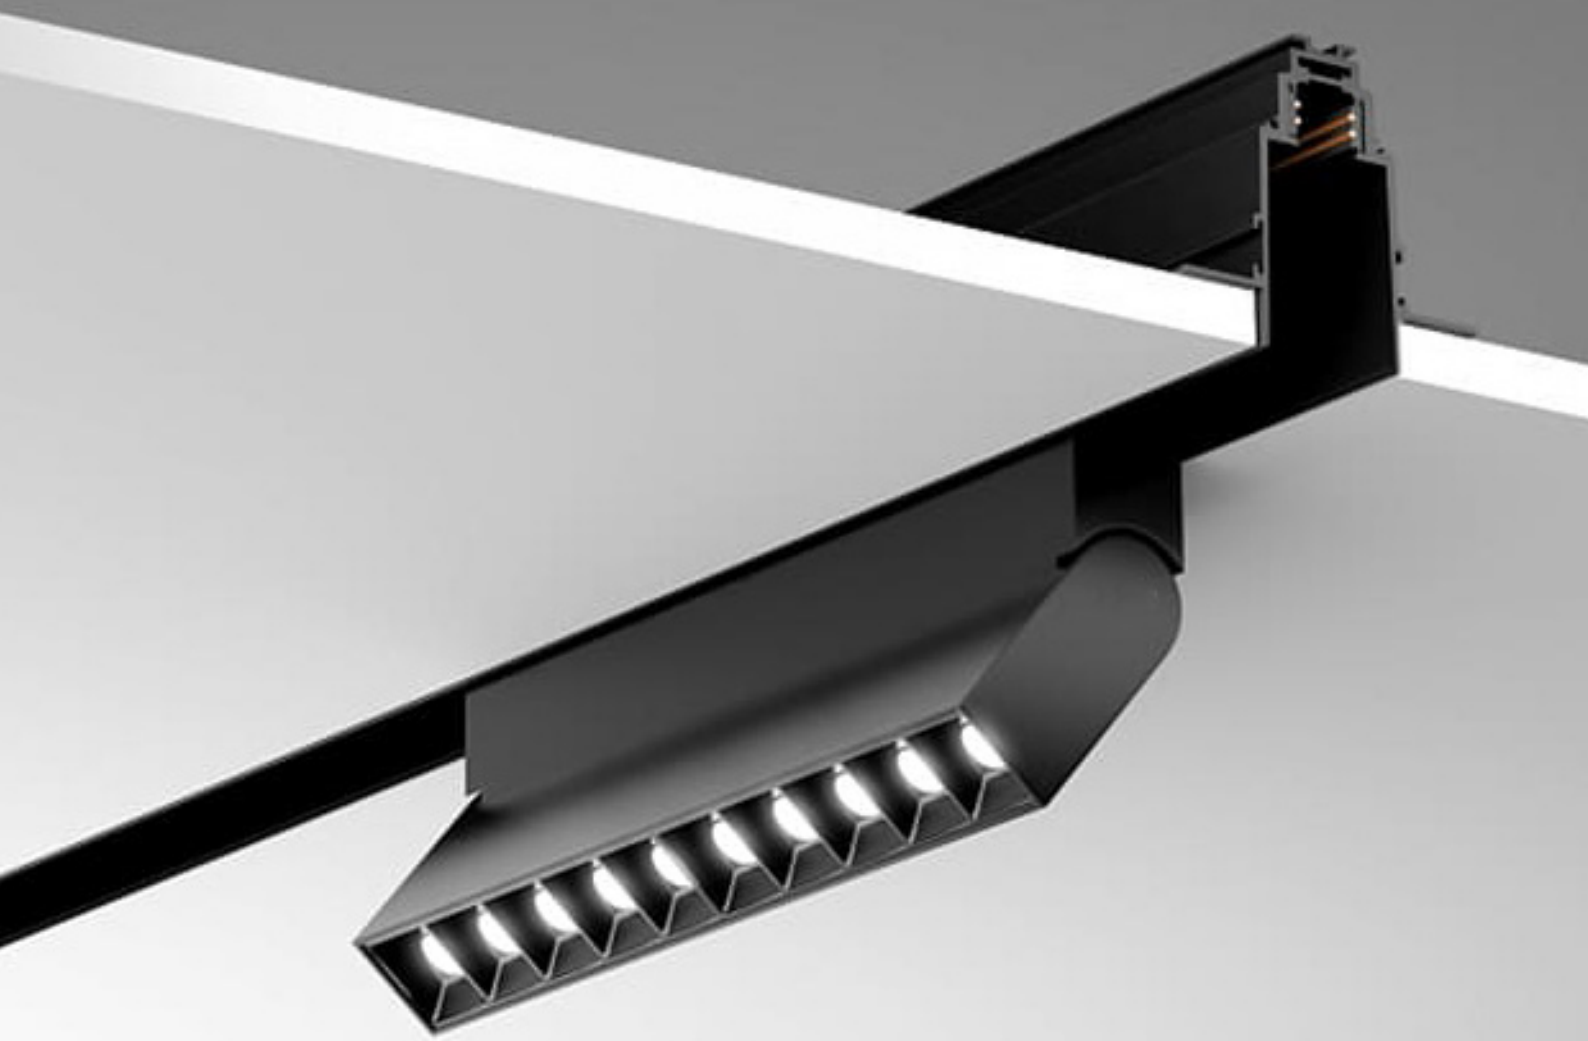

Epit Midi - 10532

48V

ALPANI



Epit family provides excellent flexibility with its movable body.



Materials

Housing made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000 and 4000K

Beam Angle

Wide flood distribution


Colors

As standard; White and Black
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

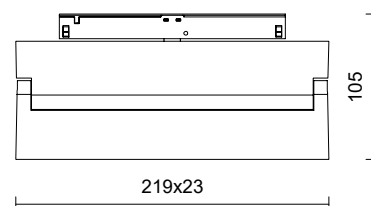

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

48V Low Voltage Track


Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10532	15W - 1388lm	80	2700	120°	White	On-Off
		90	3000		Black	Dali
			4000			

*Calculated with CRI80 - 4000K

Epit Mini - 10531

48V

ALPANI

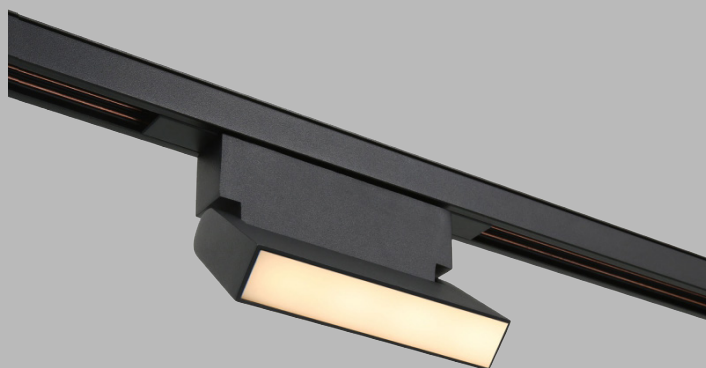

Epit family provides excellent flexibility with its movable body.



Materials

Housing made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000 and 4000K

Beam Angle

Wide flood distribution


Colors

As standard; White and Black
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

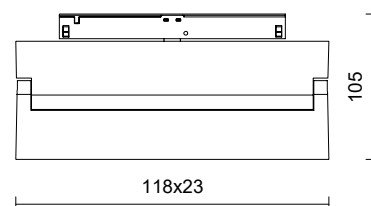

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

48V Low Voltage Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10531	6W - 555lm	80	2700	120°	White	On-Off
		90	3000		Black	Dali
			4000			

*Calculated with CRI80 - 4000K






Parkan Maxi - 10539

48V

ALPANI

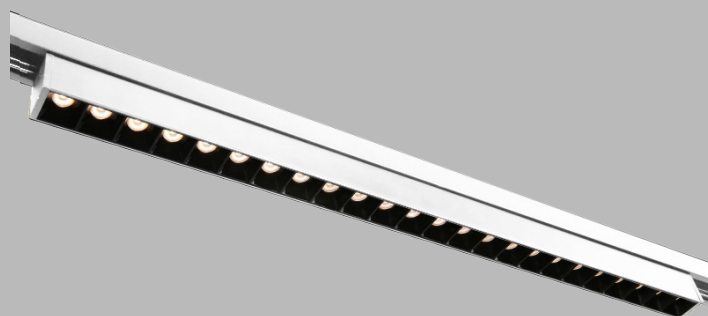

Parkan family makes a difference in your workspaces with no-dazzle screen. Offers you a flexible design with different size options.



Materials

Housing made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000 and 4000K

Beam Angle

High efficient optic medium distribution


Colors

As standard; White and Black
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

48V Low Voltage Track


Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10539	24W - 2220lm	80	2700	24°	White	On-Off
		90	3000		Black	Dali
			4000			

*Calculated with CRI80 - 4000K

Parkan Midi - 10538

48V

ALPANI

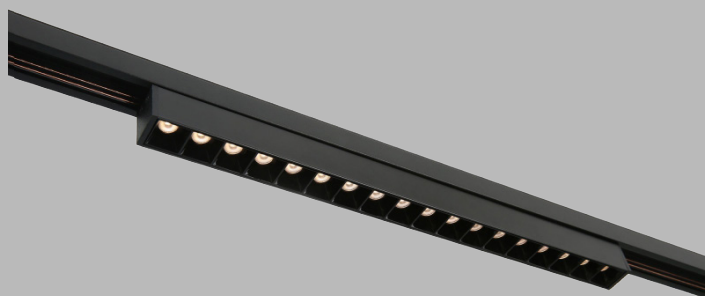

Parkan family makes a difference in your workspaces with no-dazzle screen. Offers you a flexible design with different size options.



Materials

Housing made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000 and 4000K

Beam Angle

High efficient optic medium distribution


Colors

As standard; White and Black
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

48V Low Voltage Track


Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10538	18W - 1665lm	80	2700	24°	White	On-Off
		90	3000		Black	Dali
			4000			

*Calculated with CRI80 - 4000K

Parkan Mini - 10537

48V

ALPANI

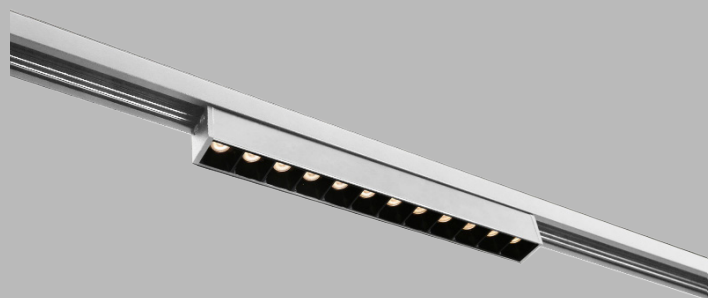

Parkan family makes a difference in your workspaces with no-dazzle screen. Offers you a flexible design with different size options.



Materials

Housing made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000 and 4000K

Beam Angle

High efficient optic medium distribution


Colors

As standard; White and Black
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

48V Low Voltage Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10537	12W - 1110lm	80	2700	24°	White	On-Off
		90	3000		Black	Dali
			4000			

*Calculated with CRI80 - 4000K

Parkan Micro - 10536

48V

ALPANI



Parkan family makes a difference in your workspaces with no-dazzle screen. Offers you a flexible design with different size options.



Materials

Housing made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000 and 4000K

Beam Angle

High efficient optic medium distribution


Colors

As standard; White and Black
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

48V Low Voltage Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10536	6W - 555lm	80	2700	24°	White	On-Off
		90	3000		Black	Dali
			4000			

*Calculated with CRI80 - 4000K






Kayro Mega - 10547

48V

ALPANI

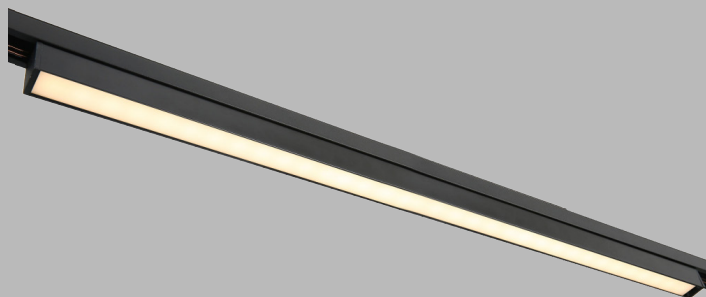

Specially developed opal diffuser makes a difference in your spaces with its efficiency and homogeneity.



Materials

Housing made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000 and 4000K

Beam Angle

Wide flood distribution


Colors

As standard; White and Black
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

48V Low Voltage Track


Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10547	36W - 3330lm	80	2700	120°	White	On-Off
		90	3000		Black	Dali
			4000			

*Calculated with CRI80 - 4000K

Kayro Maxi - 10546

48V

ALPANI

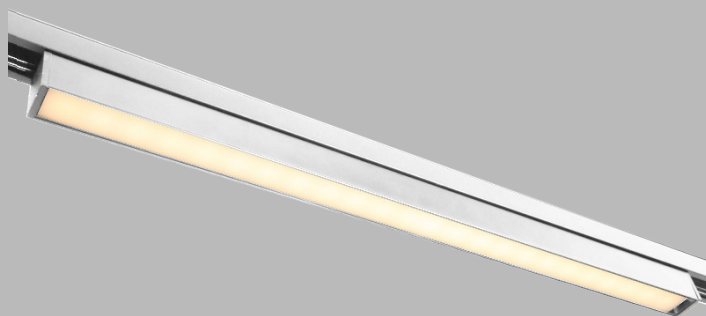

Specially developed opal diffuser makes a difference in your spaces with its efficiency and homogeneity.



Materials

Housing made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000 and 4000K

Beam Angle

Wide flood distribution


Colors

As standard; White and Black
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

48V Low Voltage Track


Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10546	24W - 2220lm	80	2700	120°	White	On-Off
		90	3000		Black	Dali
			4000			

*Calculated with CRI80 - 4000K

Kayro Midi - 10545

48V

ALPANI

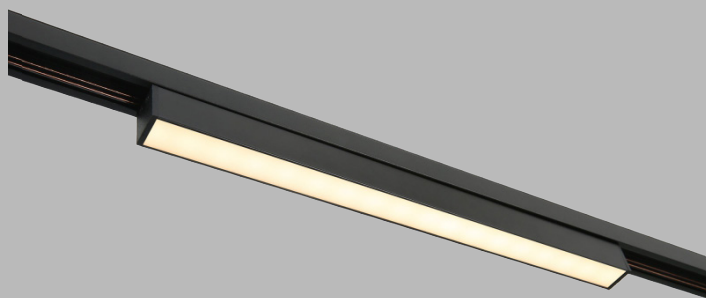

Specially developed opal diffuser makes a difference in your spaces with its efficiency and homogeneity.



Materials

Housing made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000 and 4000K

Beam Angle

Wide flood distribution


Colors

As standard; White and Black
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

48V Low Voltage Track


Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10545	18W - 1665lm	80	2700	120°	White	On-Off
		90	3000		Black	Dali
			4000			

*Calculated with CRI80 - 4000K

Kayro Mini - 10544

48V

ALPANI

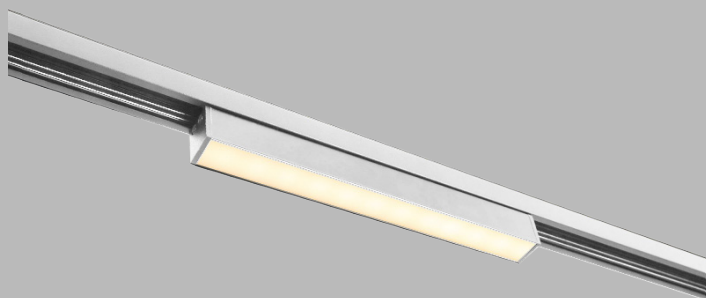

Specially developed opal diffuser makes a difference in your spaces with its efficiency and homogeneity.



Materials

Housing made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000 and 4000K

Beam Angle

Wide flood distribution


Colors

As standard; White and Black
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

48V Low Voltage Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10544	12W - 1110lm	80	2700	120°	White	On-Off
		90	3000		Black	Dali
			4000			

*Calculated with CRI80 - 4000K

Kayro Micro - 10543

48V

ALPANI



Specially developed opal diffuser makes a difference in your spaces with its efficiency and homogeneity.



Materials

Housing made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000 and 4000K

Beam Angle

Wide flood distribution


Colors

As standard; White and Black
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

48V Low Voltage Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10543	6W - 555lm	80	2700	120°	White	On-Off
		90	3000		Black	Dali
			4000			

*Calculated with CRI80 - 4000K



Vera Midi - 10550
48V

ALPANI



Parkan family makes a difference in your workspaces with no-dazzle screen. Offers you a flexible design with different size options.

IP20

CE

FIXED
↓

48V DC

LED


Materials
Housing made of aluminium, track adaptor made from thermoplastic

Light Source
As standard; CRI80 and CRI90 in 2700, 3000 and 4000K

Beam Angle
High efficient optic medium distribution

Colors
As standard; White and Black
Special RAL colours available on request

Operating Conditions
Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

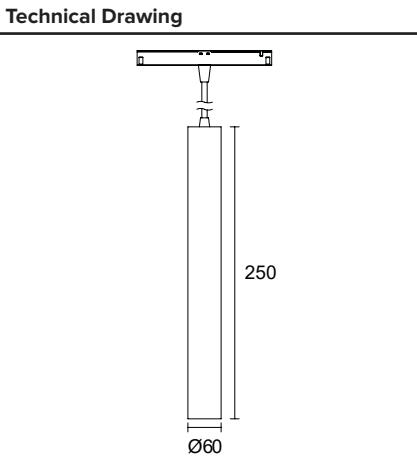

Warranty
All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product


Installation
48V Low Voltage Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10550	18W - 1665lm	80	2700	24°	White	On-Off
		90	3000		Black	Dali
			4000			


*Calculated with CRI80 - 4000K




48V Rail mounting systems provide us with different options, allowing us to increase the usage area and produce many solutions. It offers 4 different mounting variants; **Trimless, Recessed, Surface, Suspended**.



TRIMLESS
90801



RECESSED
90821

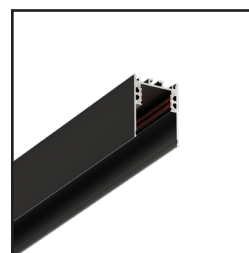

SURFACE / PENDANT
90841



TRIMLESS END CAP
90811



RECESSED END CAP
90831



SURFACE END CAP
90851



TRIMLESS CORNER
90814



RECESSED CORNER
90834



SURFACE CORNER
90854



FEED CONNECTOR
90861



MIDDLE CONNECTOR
90864



FLEXIBLE CONNECTOR
90867




SUSPENSION CORD
90870




INTRACK DRIVER 100W
90881



INTRACK DRIVER 200W
90882



DRIVER 100W
90895



DRIVER 150W
90896



DRIVER 200W
90897

ALPANI

ALPANI

DIS TICARET LIMITED Sirketi

Sinanoba Mah. Ibrahimzade Cad. No: 1B/35
34535 Buyukcekmece, Istanbul - Turkey

+90 542 515 87 85

info@alpani.com

www.alpani.com
