

OPTIMUS


PROFILES



Optimus - 32145

Profiles

ALPANI

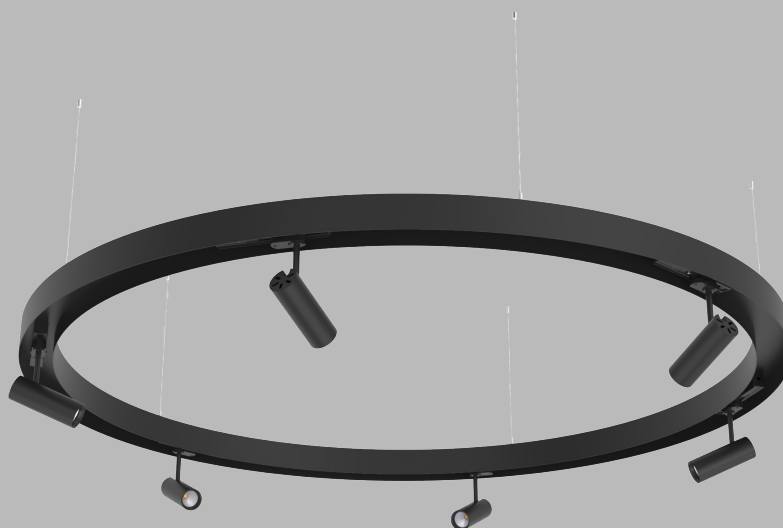

Surface / Pendant linear luminaire complete with spotlights. Different spot types can be placed on request. Custom diameters are available on request



Materials

Profile and housings made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

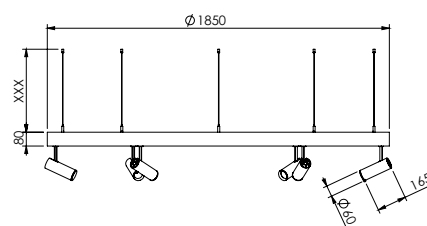

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Size - Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32145	54W (9Wx6) - 5508lm	80	2700	20°	White	On-Off
	42W (7Wx6) - 4284lm	90	3000	30°	Black	Dali
			4000	40°	Grey	
			5000	60°	Ral	

*Calculated with CRI80 - 4000K