

ALPANI

2023


**YOUR RELIABLE PARTNER IN
INNOVATIVE LIGHTING SOLUTIONS**

INDEX


PROFILES



Linarc V8
Page 21



Linarc V6
Page 24



Linarc V5
Page 26



Linarc V3
Page 29



Arter V10
Page 34



Arter V8
Page 35



Arter V7
Page 37



Arter V4
Page 38



Plasy V10
Page 44



Plasy V8
Page 46



Paral V10
Page 52



Paral V8
Page 53



Optima V1
Page 56



Optima V2
Page 57



Optima V3
Page 58



Optima Trimless V1
Page 59



Optima Trimless V2
Page 60




Optima Trimless V3
Page 61



Optimus
Page 63



Altario V10
Page 65




Altario V8
Page 68



Artona V10
Page 71



Artona V8
Page 74



Arak
Page 77




Kaval V8
Page 79



Kaval V4
Page 81

INDEX

TRACKLIGHT

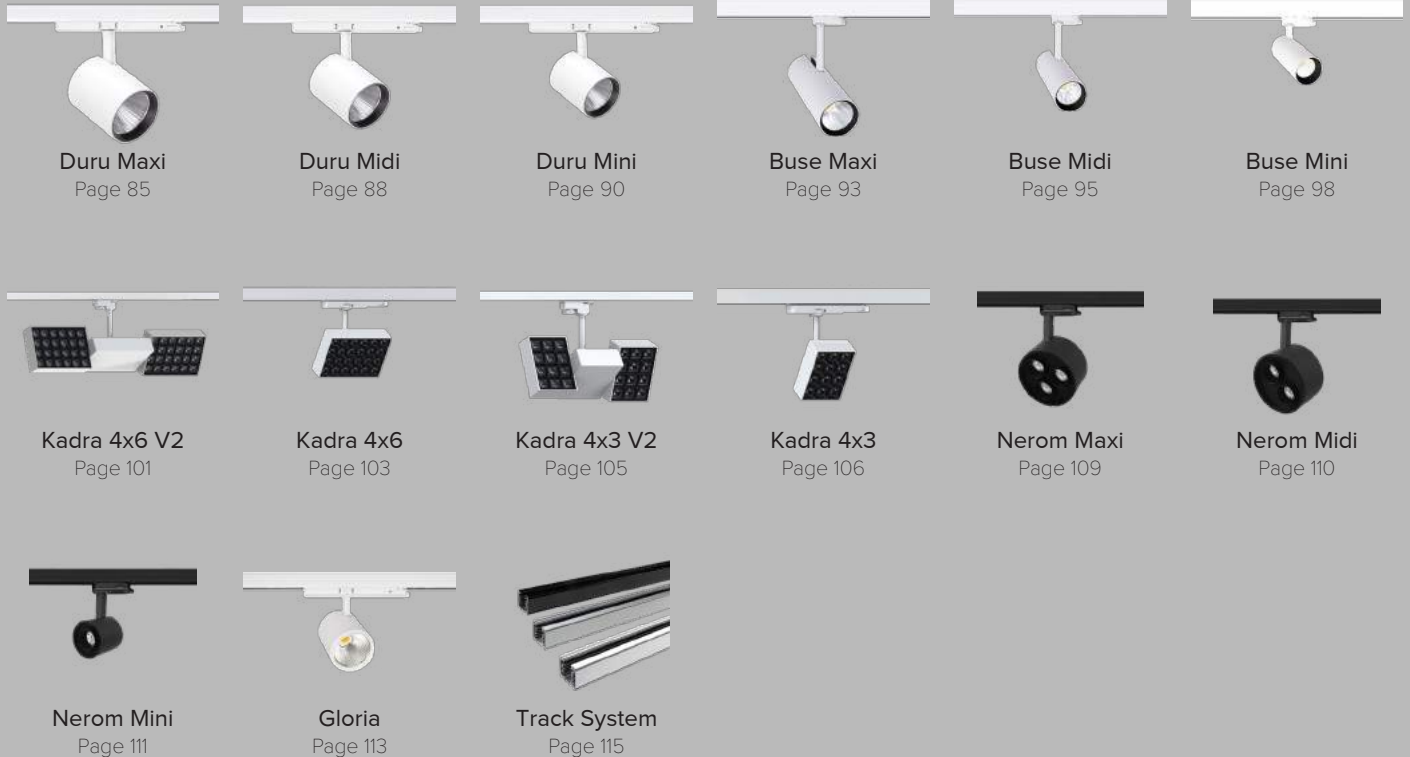

RECESSED



INDEX



Rella Midi V2
Page 147



Rella Mini
Page 148



Rella Mini V2
Page 149



Kual Mega
Page 151



Kual Maxi
Page 152



Kual Midi
Page 153



Kual Mini
Page 154



Kual Micro
Page 155



Axa Maxi
Page 157



Axa Midi
Page 158



Axa Mini
Page 160



Axa Micro
Page 161



Vator Maxi
Page 163



Vator Midi
Page 165



Vator Mini
Page 167



Golati R
Page 169



Golati S
Page 170



Tampa R
Page 173



Tampa S
Page 175



Trimno RA
Page 177



Trimno RF
Page 180



Trimno B
Page 181



Flar V10
Page 183



Flar V5
Page 185



Flar V3
Page 186



Flar V2
Page 188



Flar V1
Page 189



Galar Mega
Page 191



Galar Maxi
Page 192



Galar Midi
Page 193



Galar Mini
Page 196



Galar Micro
Page 197



Hera Mega
Page 199



Hera Maxi
Page 200



Hera Midi
Page 201



Hera Mini
Page 202



Hera Micro
Page 203



Lonit 30x30
Page 205




Lonit 30x60
Page 206



Lonit 30x120
Page 208



Lonit 60x60
Page 209



Lonit 60x120
Page 211

INDEX

SURFACE / PENDANT



Lixeno Maxi
Page 215



Lixeno Midi
Page 217



Lixeno Mini
Page 219



Arien Maxi
Page 221



Arien Midi
Page 222



Arien Mini
Page 223



Hant Maxi
Page 225



Hant Midi
Page 227



Hant Mini
Page 229



Glator Maxi
Page 231



Glator Midi
Page 232



Glator Mini
Page 233



Stel R
Page 235



Stel S
Page 237



Longe 30x30
Page 239



Longe 30x60
Page 240



Longe 30x120
Page 241



Longe 60x60
Page 244



Longe 60x120
Page 245

WALL / GROUND



Permo Glass R
Page 249



Permo Glass S
Page 250



Permo Metal R
Page 252



Permo Metal S
Page 253



Batt
Page 255




Tome
Page 257



Kelon Midi R
Page 259



Kelon Midi S
Page 260



Kelon Mini R
Page 262



Kelon Mini S
Page 263

INSTRUCTIONS FOR CREATING CONFIGURATION CODE

Each product supplied by Alpani has its own unique product code and configuration code that defines specific features such as Power, CRI, Kelvin, Beam Angle, Color and Control Type.

Product codes can be found in the product tables or next to product name in the catalogue.

Code	Power - Lumen	CRI	Kelvin	Beam Angle	Color	Control
10145	31W - 4340lm	80	2700	20°	WHite	ON-Off
	28W - 3920lm	90	3000	30°	BLack	DAlI
	24W - 3360lm		4000	40°	GRey	WIreless
	20W - 2800lm		5000	60°	RAI	

Configuration code contains information that complements the specification. When placing an order, the product codes should contain the fully completed configuration part. Part of the configuration code should be placed after the main product code as shown in the example below:

Product Code Configuration Code (Complemented Manually)

10145	28	80	30	40	WH	ON
Code	Power	CRI	Kelvin	Beam	Color	Control

Order Code



Alpani is a global lighting company designs and develops luminaires with key differentiators, innovative features and quality materials. With dedicated R&D resources, our products are made to fulfil design intents and purposes with convenience, ever evolving to meet various up-to-date industry standards and requirements.

Constantly engaging new ideas through close collaboration with lighting design professionals, Alpani strives to develop exciting products that are tailored for new and specific design ideas. Luminaires are designed and developed for specific applications and intentions, moreover meeting lighting industry expectations in terms of creativity, convenience, eco-friendly, human well-being and cost effectiveness.

With exceeding 10 years of extensive knowledge, covering expertise in metal forming, heat management, light and optic quality, control electronics and power supplies, Alpani is confident that our team will continuously deliver impressive luminaires in years to come.

Alpani's strength lies in the combination of product quality with service quality. Alpani offers a wide range of services from design phase to helping to identify and develop technology solutions, customized products or custom-designed, project specific products. From design to purchase and all the way to after-sales service, Alpani also offers continuous technical advice, combined with fast response times and the full availability of a team of highly qualified experts.

MATERIALS

Quality is one of the essential values in the activity of our corporation and is rated a strategic key point in our business development. Perfection and dedication in making the quality our differentiating value is our commitment.

We choose the components of the products from among the best suppliers and control all the details of the manufacturing processes to achieve a top quality product with a perfect finish.



Each Alpani luminaires is submitted to the control of the quality department to ensure that they always satisfy the highest quality standards demanded by customers and that they also surpass the even higher requirements that our company imposes on itself.


Alpani never stops developing innovative products in terms of concepts such as LED life expectancy, thermal management of light sources, faithful colour rendering, or the improvement of the efficiency, among many other factors.

OPTICS

One of the key elements of our luminaires is the optics. For this reason we use only high quality reflectors and lenses.

Optics we use specifically designed to minimise flux losses, taking advantage of the gross flow volume of the LED and getting the luminaire to offer maximum effective output lumens.

A successful lighting installation must consider the glare as well. While selecting optics for our luminaires we take care of the visual comfort of the spaces where it is installed.

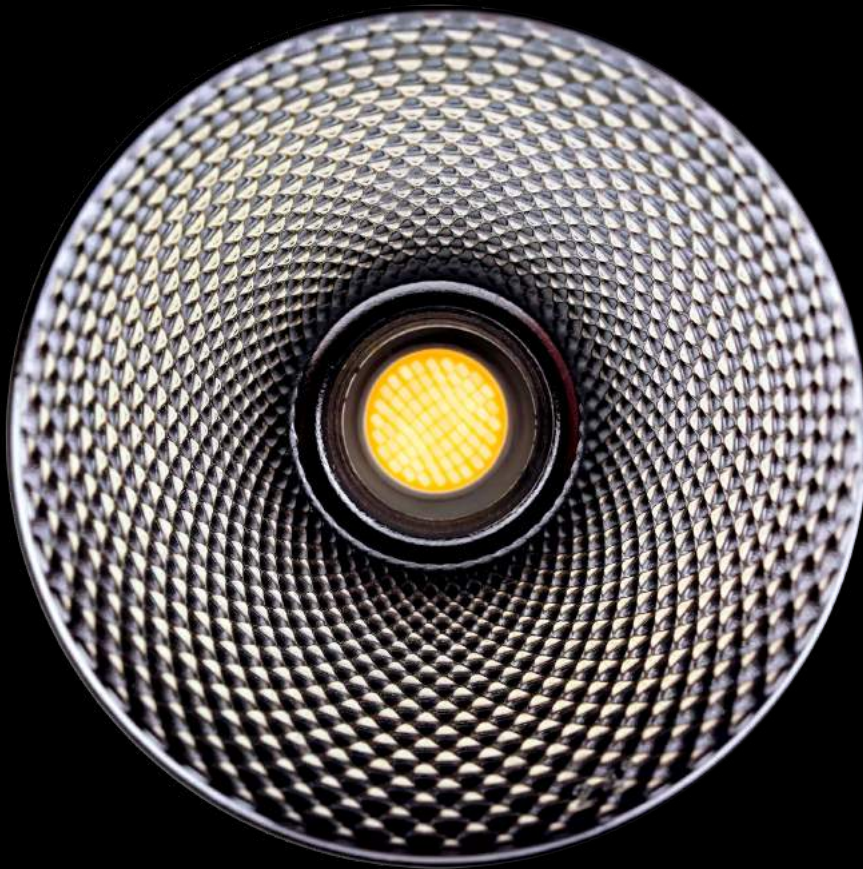

Alpani uses reflectors made of pure aluminium, LOR of up to 93%. Narrow, medium and wide beams with luminaire efficacy up to 150 lm/W.

We use lenses made of temperature-resistant plastic. Narrow, medium and wide beams with luminous intensity of up to 60,000 cd.

LED

LED chips in Alpani products has been supplied through the chip manufacturers which are market leading in terms of high standard and innovative material. So, luminaires can deliver the maximum amount of light using as little as the power. This LED efficiency could reach 150 lumen/W. The luminous efficacy could be varied for different correlated color temperature.

The appearance of light color both in terms of chromacity (CCT) and color rendition (CRI) are important in the overall feeling of space. Therefore designers should consider both chromacity and color rendition as key components of a design.




Along with the usual efficiency and long life, color rendering index is a major factor to justify the led light quality as well, which defines color quality of the LED. In simple word CRI is led's ability to make red, green and all other shades look just the way they shoul.

New research expresses that to improve the quality of the lights along with CRI value one more factor needs to be considered; R9 value the current CRI scale does not cover the strong red that are prevalent in skin tones, art work, clothing and fruit.

HEAT DISSIPATION

The thermal behaviour of a luminaire has a significant influence on the performance of the light sources and drivers it contains. Consequently, luminaire design plays a key role in maintaining the required performance of a lighting installation.

Effective heat dissipation will maintain optimum brightness of a discharge lamp or extend the life of an LED light source. In the latter case the heat dissipation within a luminaire is crucial to both the performance and the longevity of the LED chip.

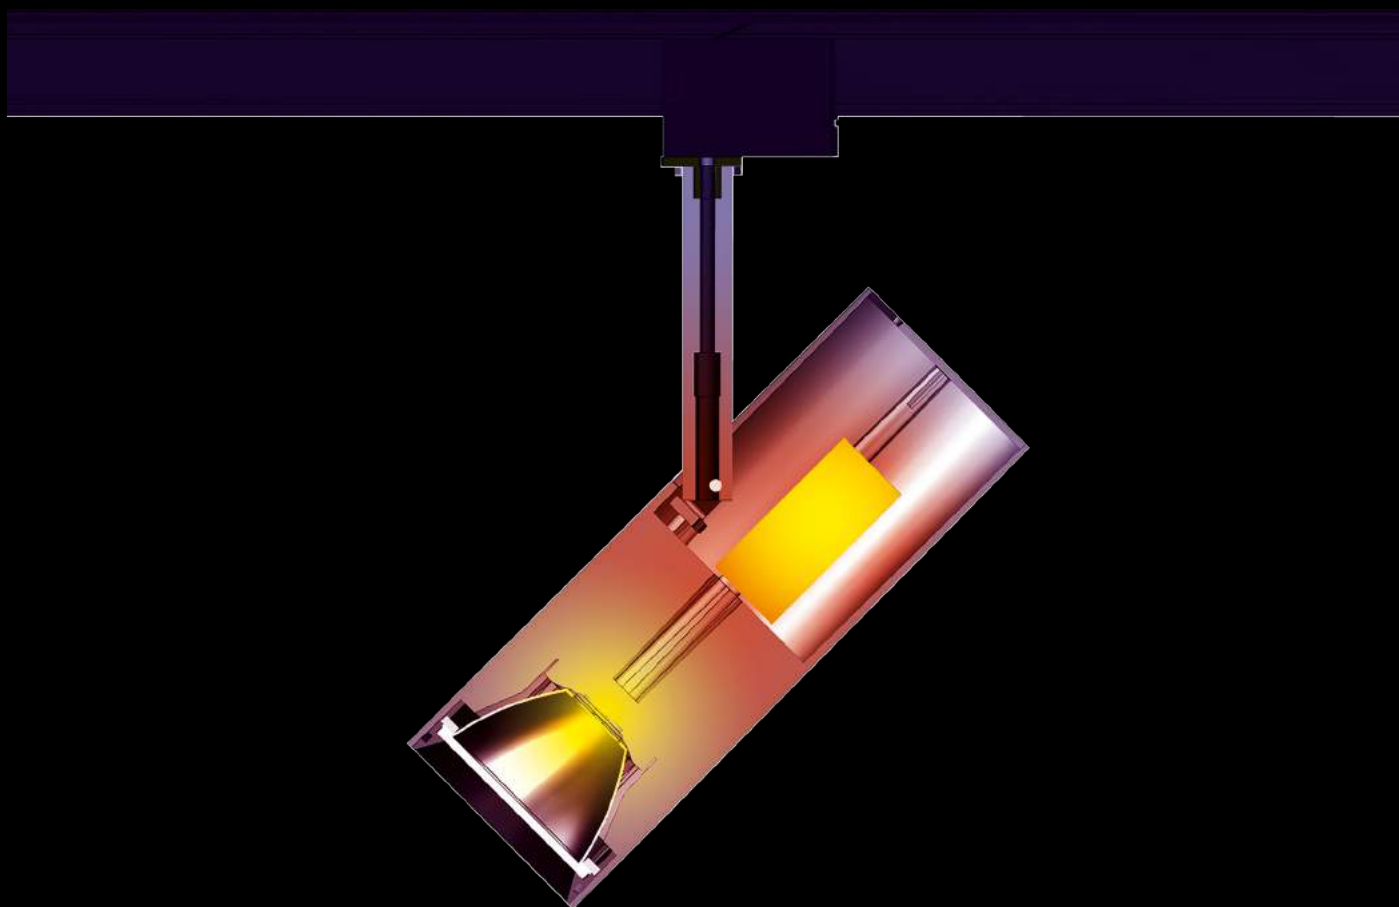


Thermal simulations and laboratory tests on luminaires have enabled Alpani to create passive heat sinks in aluminium, units that ensure perfectly efficient, long-lasting LEDs under the standard operating conditions.

This ability to correctly design a heat sink and effectively manage heat dissipation throughout the luminaire is demonstrated by a remarkably low failure rate, compared to industry norms.

LIGHTING DESIGN

In all projects it is necessary to take into account an infinite number of elements so that the resulting space is fully functional, comfortable, and practical. In this sense, lighting design is a factor that plays an important role and should not be overlooked.

In offices, correct design will increase the productivity of the employees dramatically whereas wrong lightplan may effect the mood negatively. In office lighting design, correct light levels, correct CCT selection and dimming decisions should be considered. Apart from that, glare factor is very critical. Glare is both visually and psychologically disturbing to employees and must be minimized by correct lighting design.

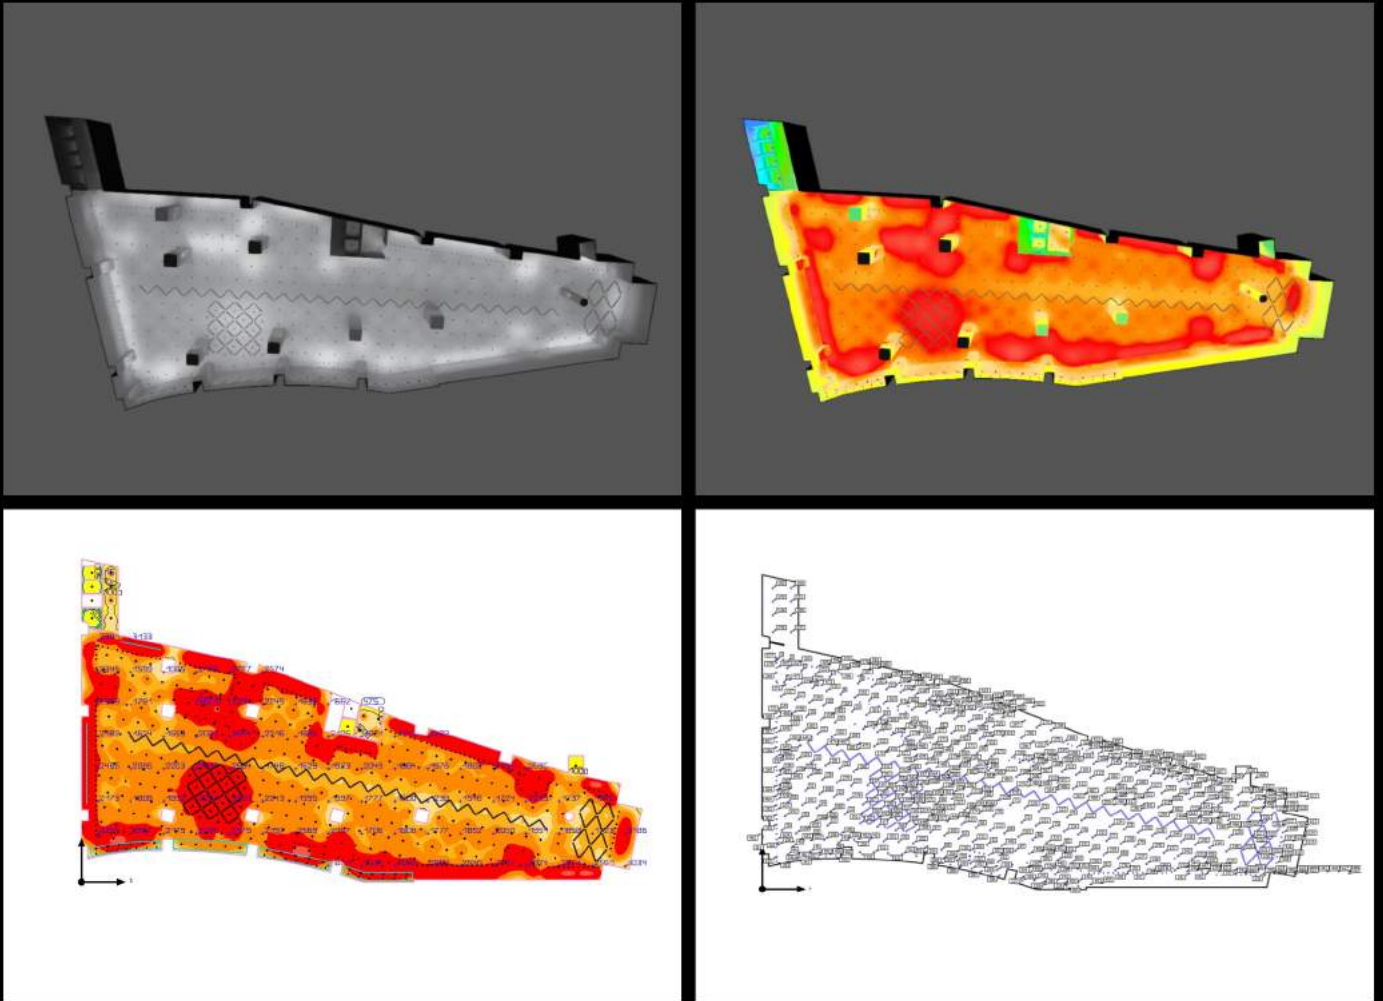


In hotels and restaurants spaces where customers want to feel comfortable, relaxed and enjoying their time, lighting is of course a very important tool that influence the mood and behaviour. Alpani project team consider all these points and integrates correct luminaire selection with correct CCT and and DIM options including Warm DIM.

In shoplights, correct lighting design effects positively the purchasing decisions of the customer. Our lighting design team is professional in lighting design of retail projects as well. We do integrate customer needs, concept of the store and main lighting principles to create best solutions.

ENVIRONMENT

Alpani aims to reduce our affect on natural resources and the environment, whilst trying to recycle waste and utilise recycled materials through a programme of continual improvement, developments to provide our customers with effective service, and efficient lighting solutions.

Alpani operates in a sustainable way by creating lighting solutions best adapted to customer requirements, with the least possible impact on the environment including consumption of natural resources. Alpani contributes to and takes responsibility for the furtherment of sustainability, which it also requires of all suppliers in its chain.

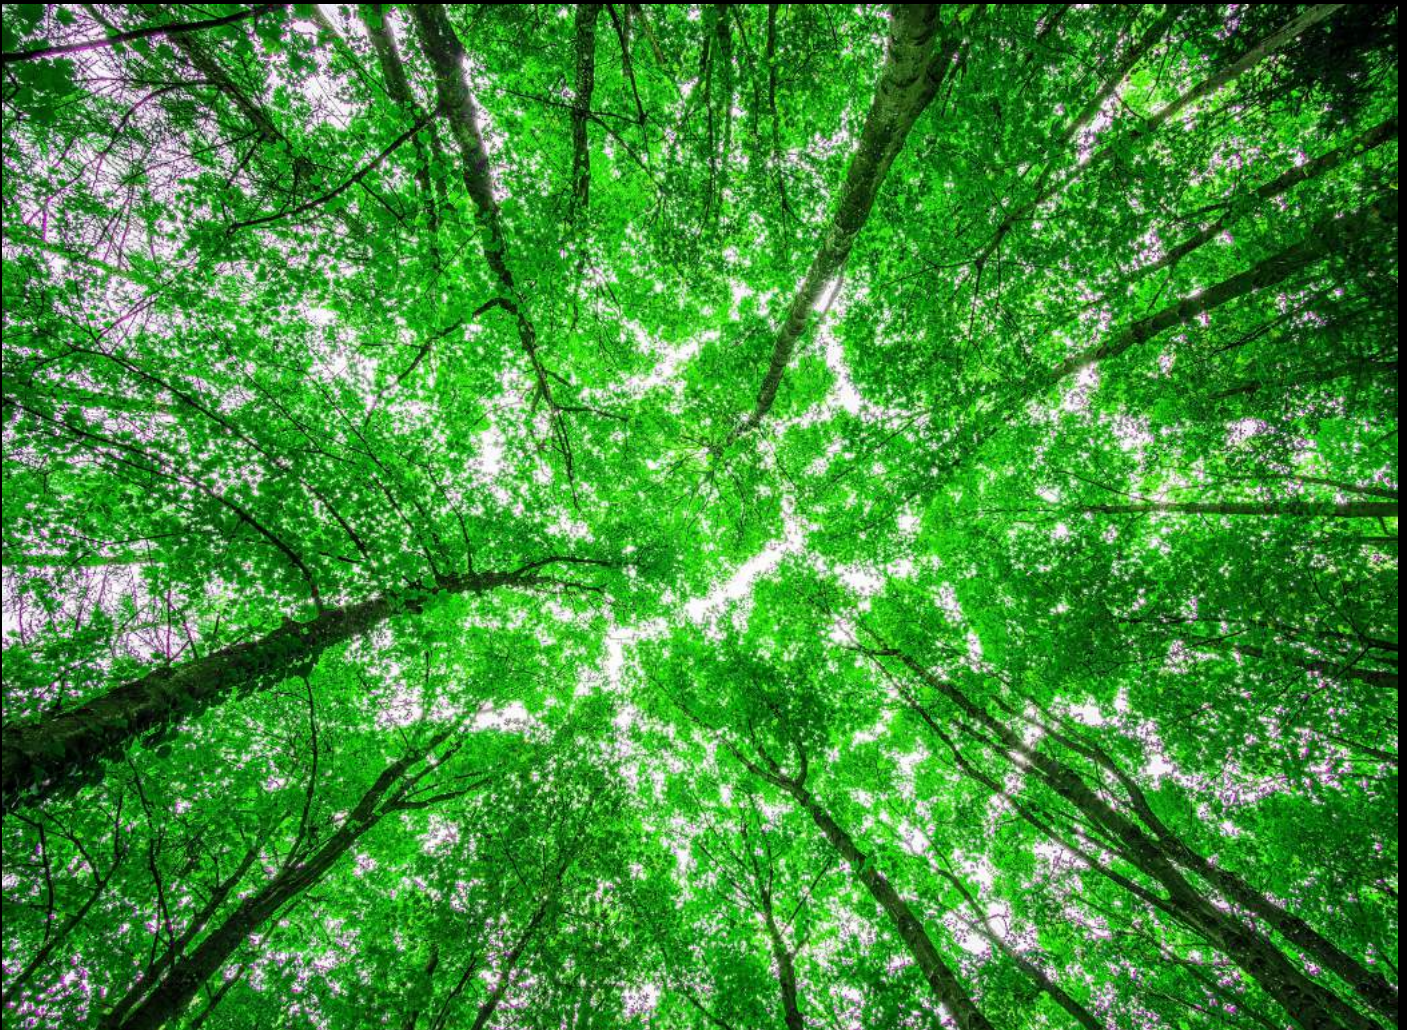

Through our environmental management system we are continually reducing our use of natural resources, whilst optimising recycled materials, avoiding waste generation and increasing recycling. We carry our company values and policies into our supply chain so that our customers can have confidence in the fact that all our lighting solutions are manufactured using only environmentally safe materials and processes.

The best contribution we can make towards an ecologically sustainable society is to manufacture energy efficient light fittings. To run an efficient business we have the same challenges as our customers to reduce our energy usage and operate within a framework that examines the life and environmental impact of the materials we use day to day to manufacture our products.




PROFILES

18	LINARC
30	ARTER
40	PLASY
48	PARAL
54	OPTIMA
62	OPTIMUS
64	ALTARIO
70	ARTONA
76	ARAK
78	KAVAL

LINARC

PROFILES

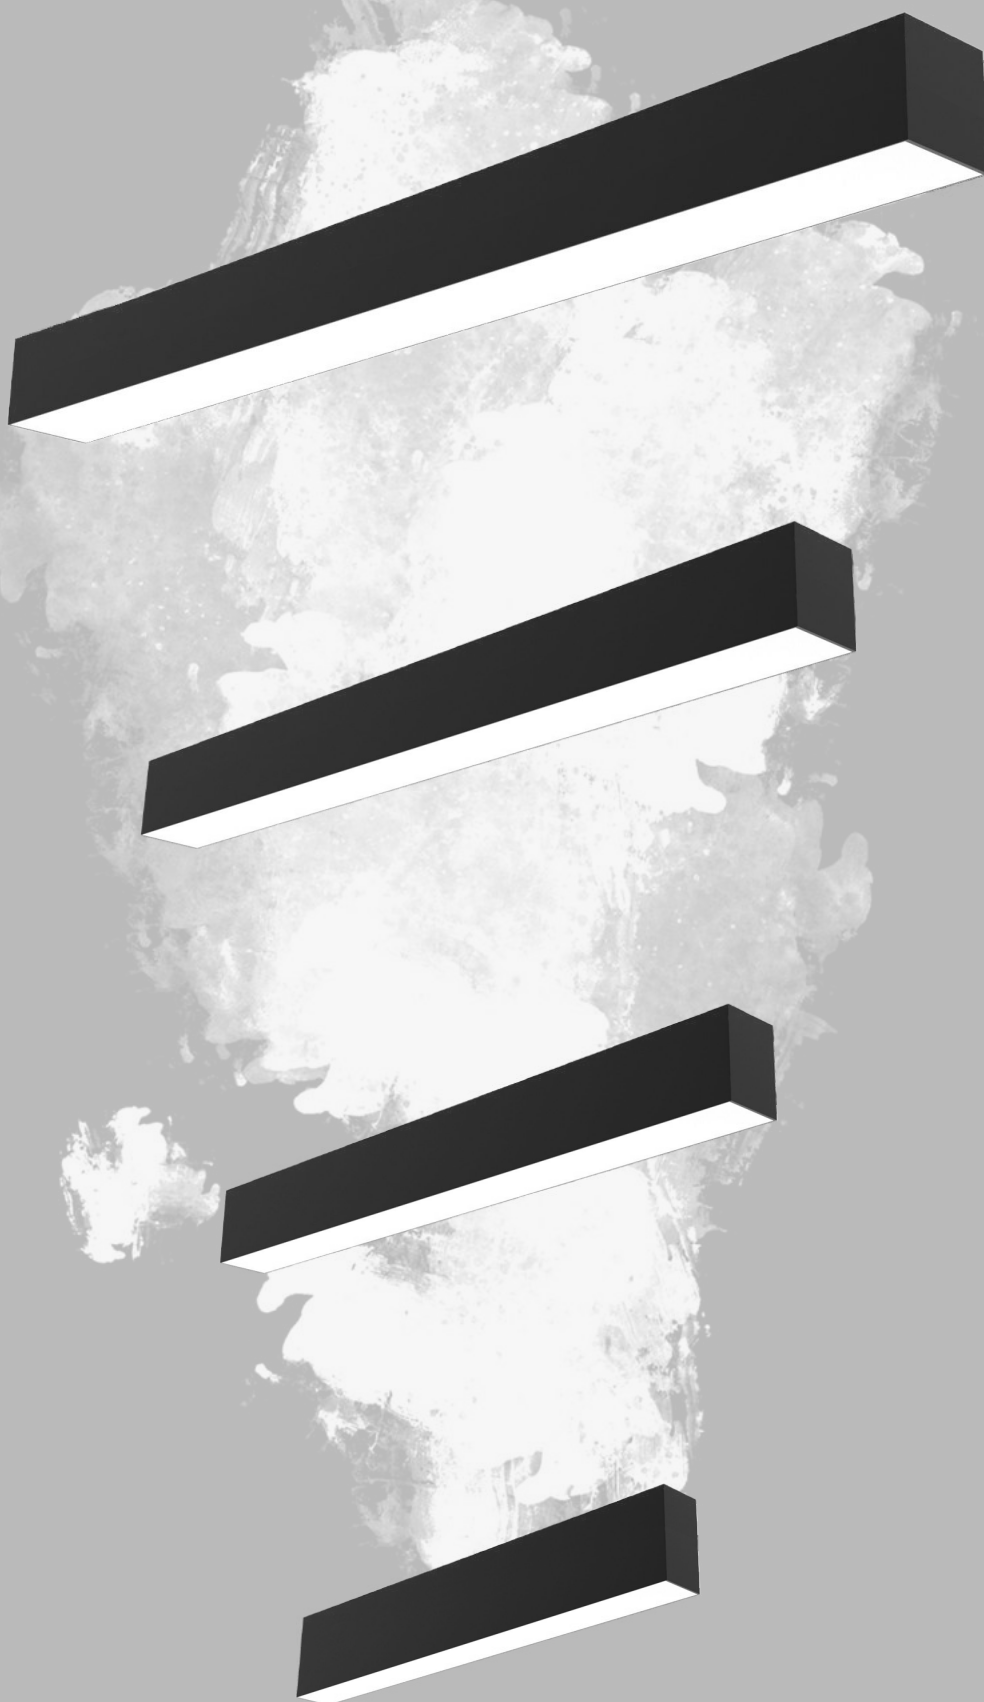

LINARC

PROFILES



LINARC


PROFILES



Linarc V8 - 32107

Profiles

ALPANI

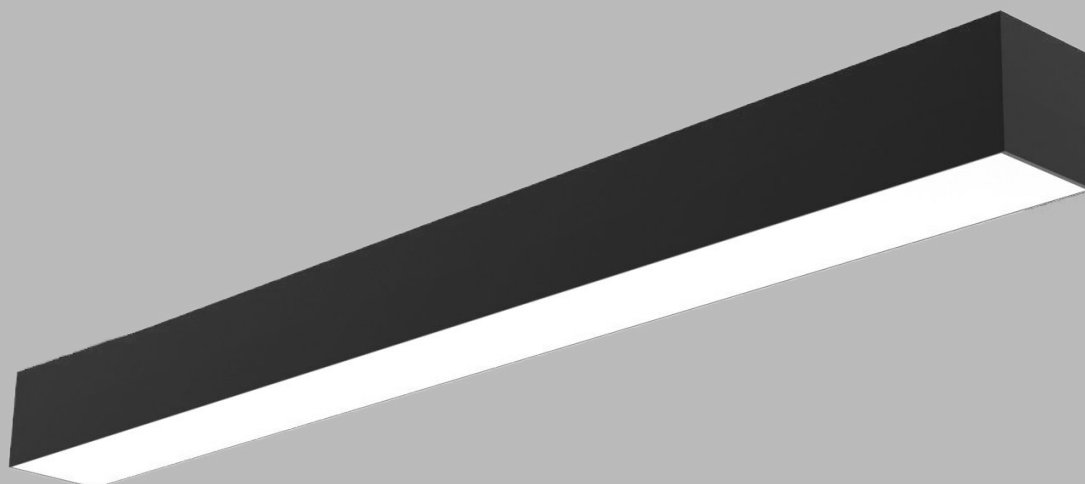

Surface / Pendant continuous linear luminaire complete with LED boards, opal diffuser and driver



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Tunable White available on request

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

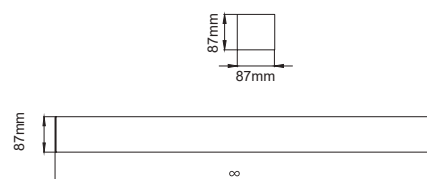

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32107	32W/m - 3488lm	80	2700	110°	White	On-Off
	22W/m - 2398lm	90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K






OTOMOTIV

Linarc V6 - 32106

Profiles

ALPANI

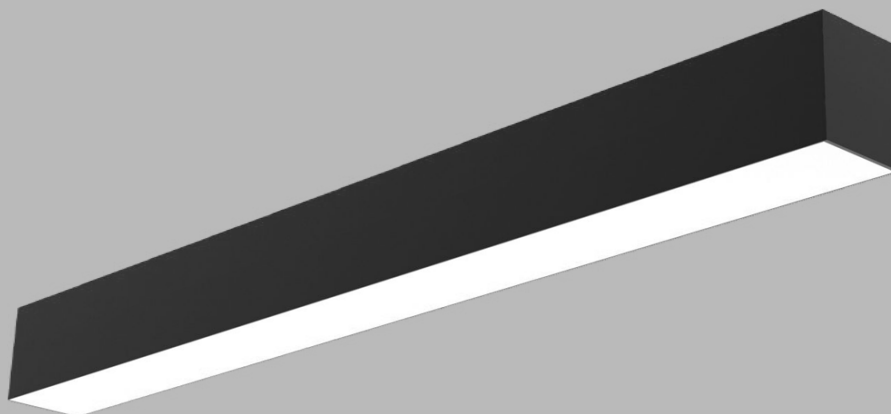

Surface / Pendant continuous linear luminaire complete with LED boards, opal diffuser and driver

IP20



FIXED
↓

220-240V
50-60Hz

LED

Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Tunable White available on request

Beam Angle

Wide flood distribution

Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32106	32W/m - 3488lm	80	2700	110°	White	On-Off
	22W/m - 2398lm	90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K



KİTAPTA
%50
İNDİRİM

Bilim Kurgu - Fantastik

390 TL'ye kadar
ALISVENISINIZ
%50
İNDİRİM

Bilim Kurgu - Fantastik


Non-Fiction

Non-Fiction

Linarc V5 - 32105

Profiles

ALPANI

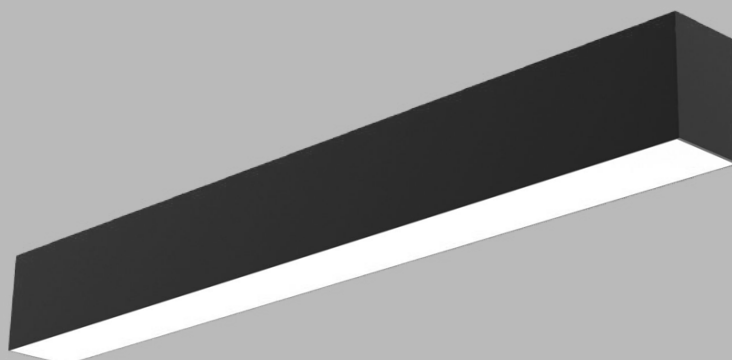

Surface / Pendant continuous linear luminaire complete with LED boards, opal diffuser and driver

IP20



220-240V
50-60Hz

LED

Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Tunable White available on request

Beam Angle

Wide flood distribution

Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32105	32W/m - 3488lm	80	2700	110°	White	On-Off
	22W/m - 2398lm	90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K






Linarc V3 - 32104

Profiles

ALPANI

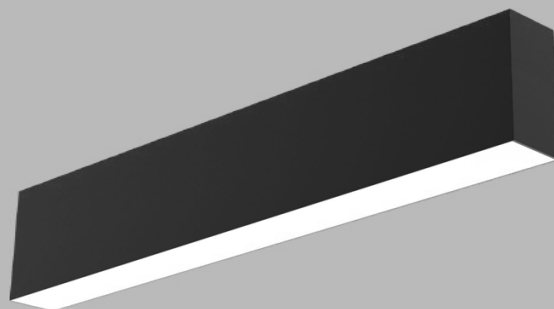

Surface / Pendant continuous linear luminaire complete with LED boards, opal diffuser and driver



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Tunable White available on request

Beam Angle

Wide flood distribution

Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation


Surface / Pendant

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32104	32W/m - 3488lm	80	2700	110°	White	On-Off
	22W/m - 2398lm	90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K


ARTER

PROFILES

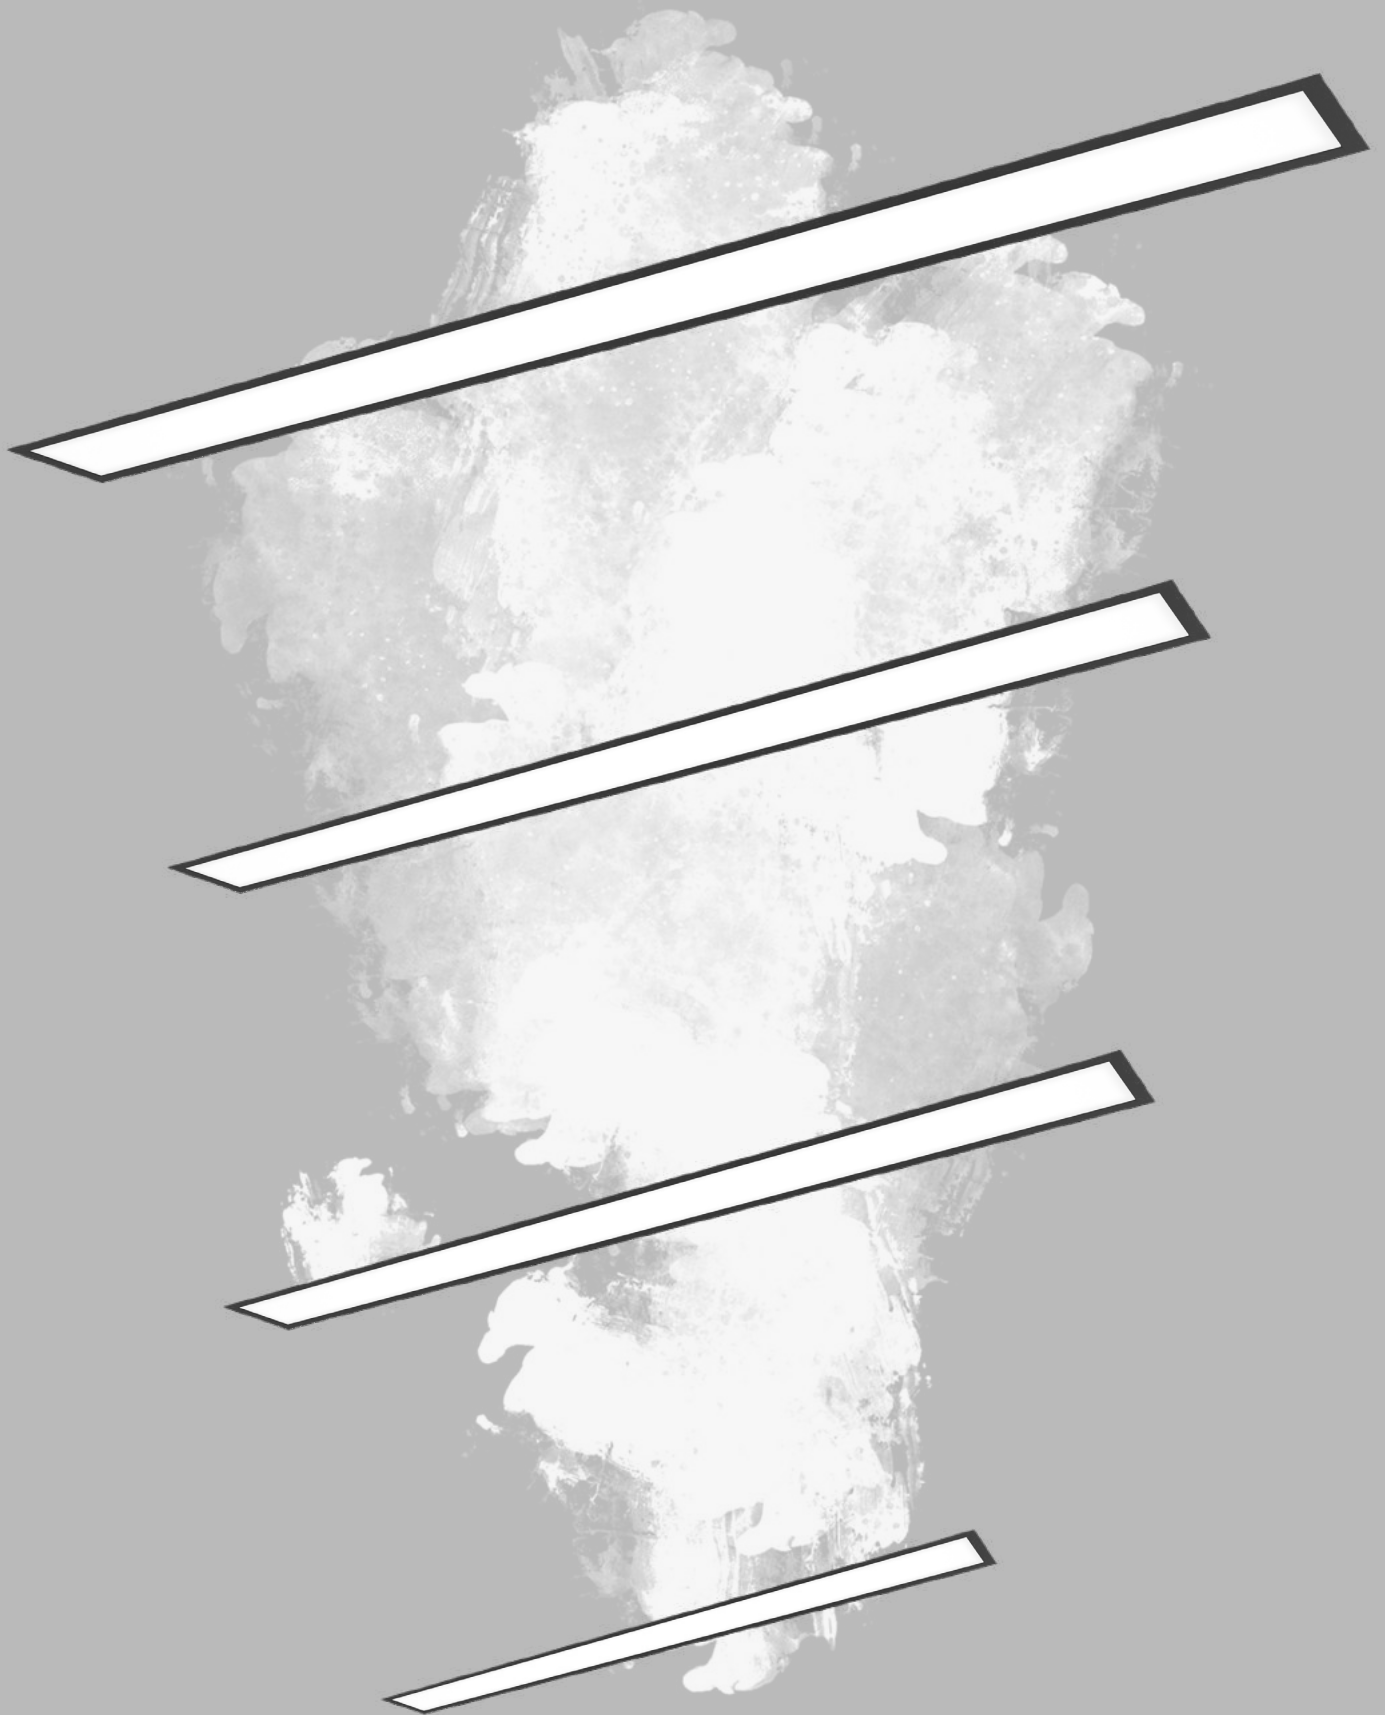


ARTER

PROFILES

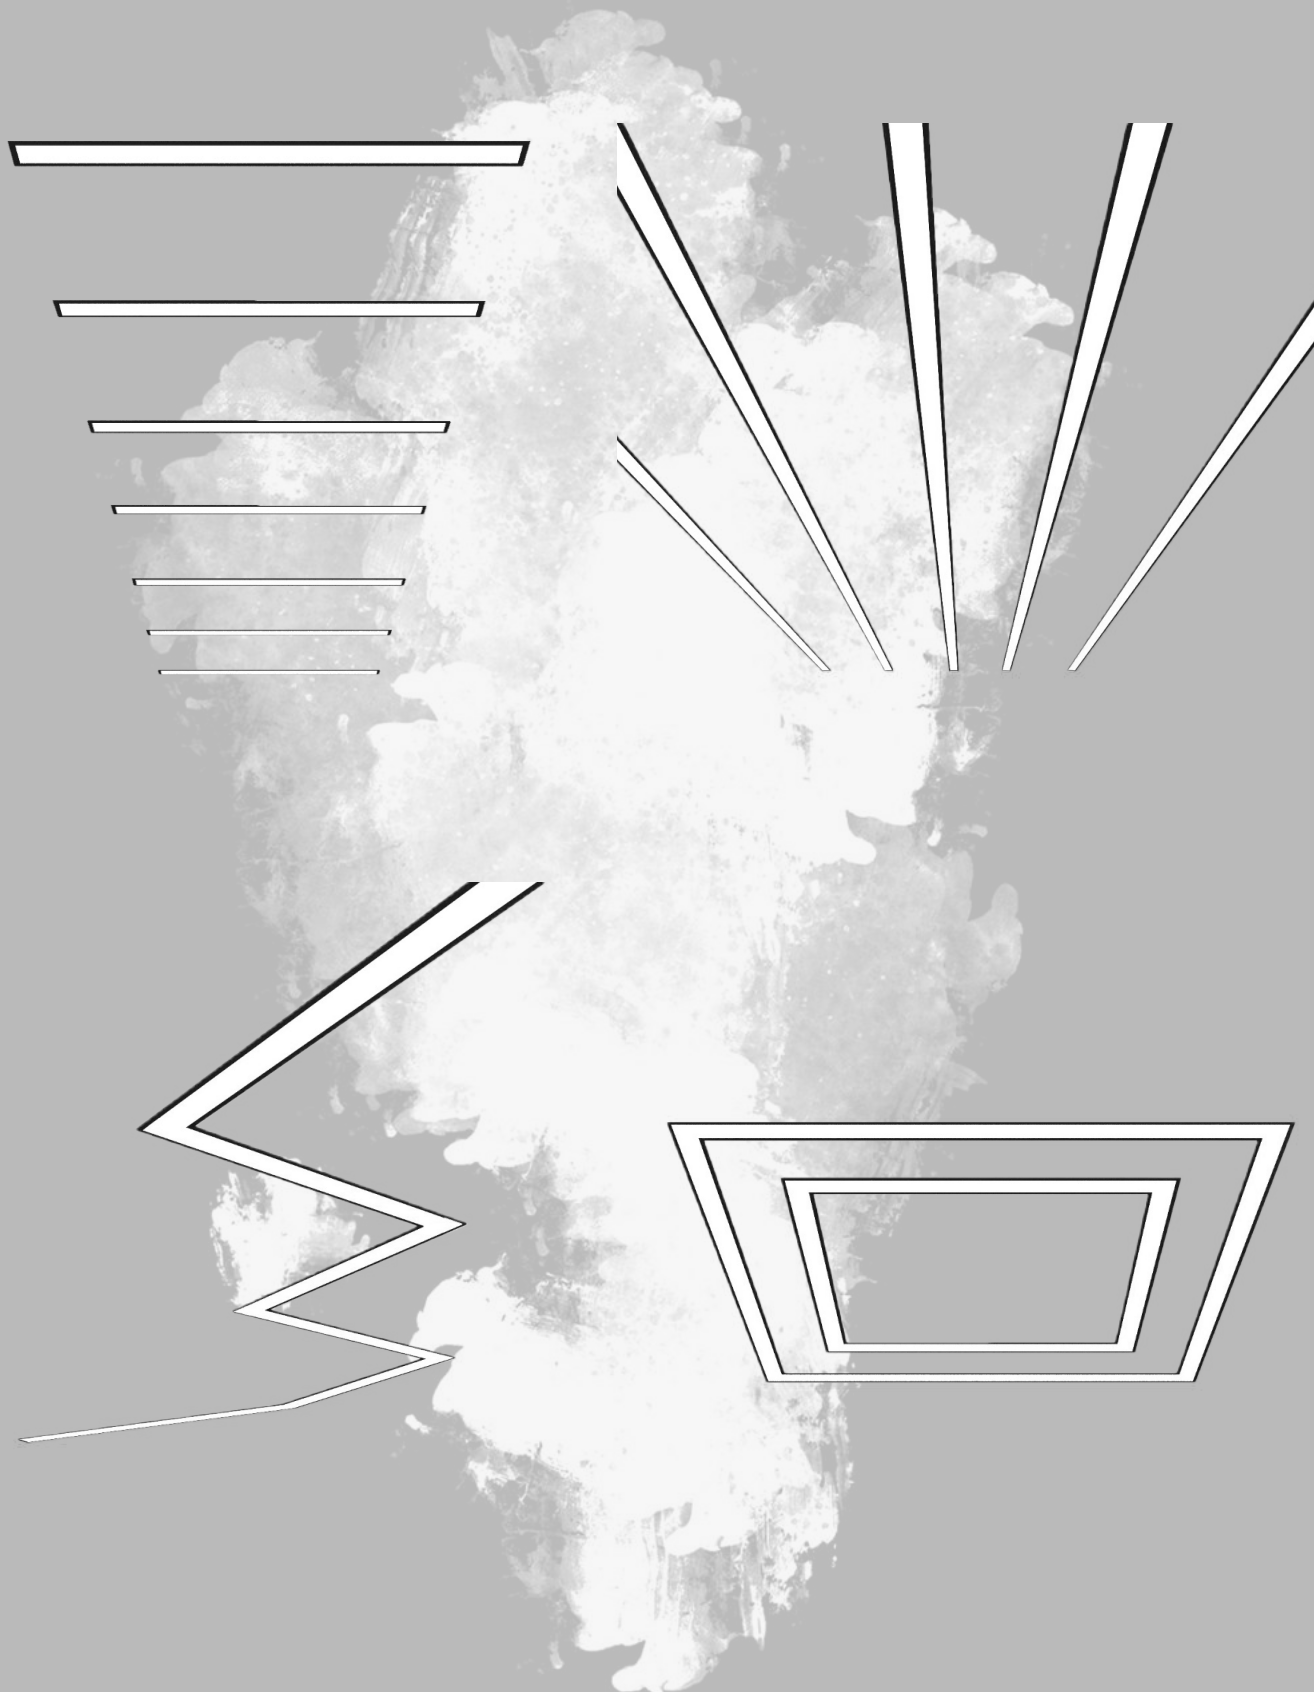





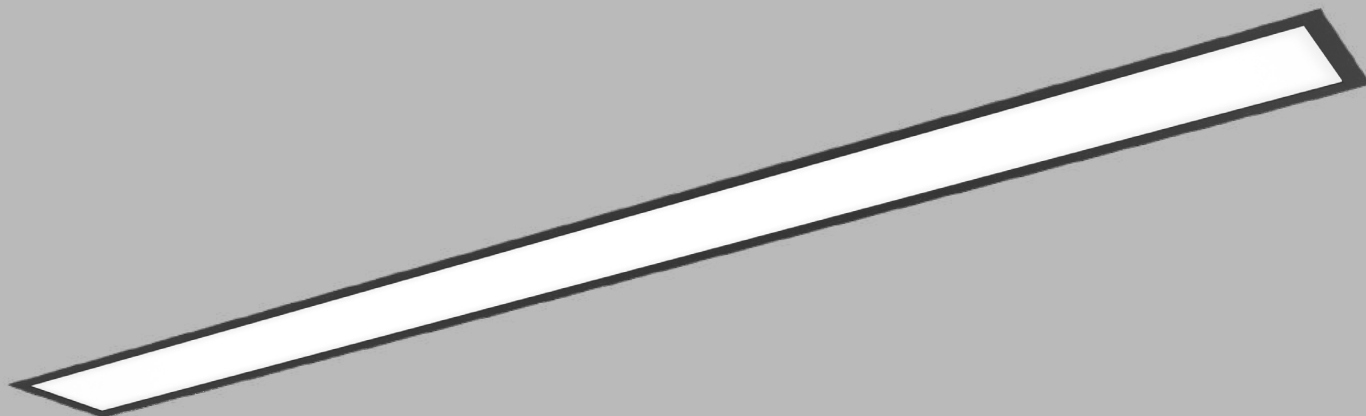

Recessed continuous linear luminaire complete with LED boards, opal diffuser and driver



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Tunable White available on request

Beam Angle

Wide flood distribution



Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty


All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
22107	32W/m - 3488lm	80	2700	110°	White	On-Off
	22W/m - 2398lm	90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

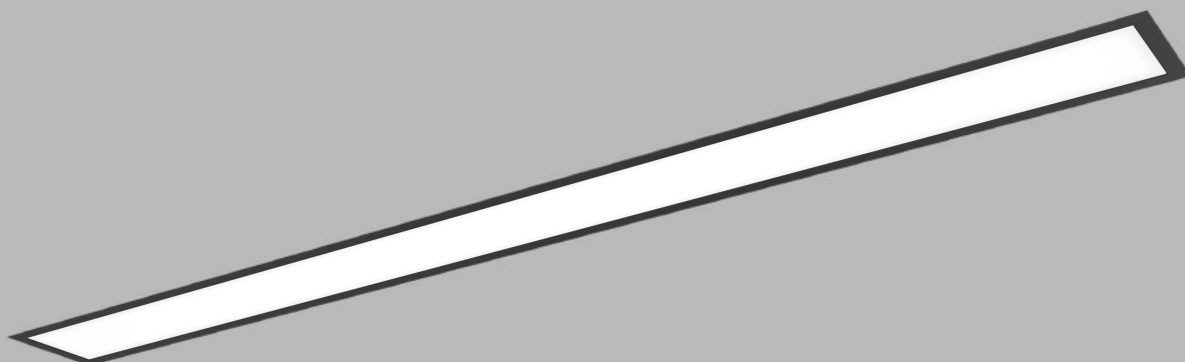

Recessed continuous linear luminaire complete with LED boards, opal diffuser and driver



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Tunable White available on request

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

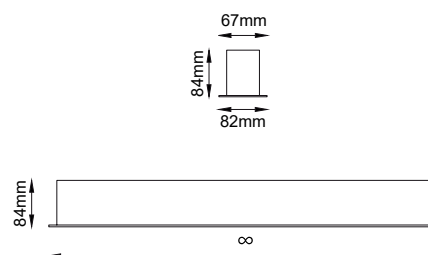

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product


Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
22106	32W/m - 3488lm	80	2700	110°	White	On-Off
	22W/m - 2398lm	90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K



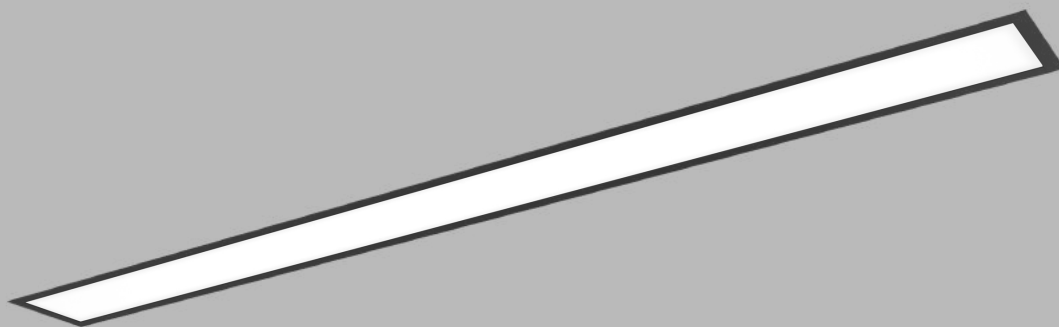

Recessed continuous linear luminaire complete with LED boards, opal diffuser and driver



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Tunable White available on request

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

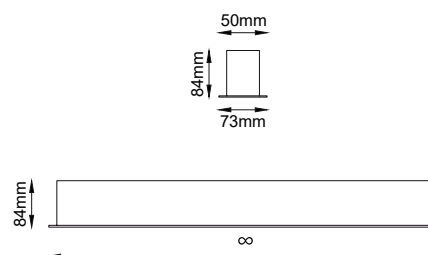

Warranty


All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
22105	32W/m - 3488lm	80	2700	110°	White	On-Off
	22W/m - 2398lm	90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

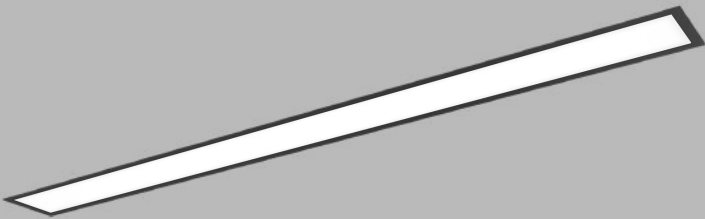

Recessed continuous linear luminaire complete with LED boards, opal diffuser and driver



Materials
Profile made of aluminium

Light Source
As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Tunable White available on request

Beam Angle
Wide flood distribution


Colors
As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions
Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

Warranty
All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation
Recessed

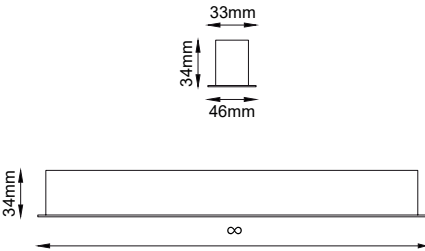


Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
22104	32W/m - 3488lm	80	2700	110°	White	On-Off
	22W/m - 2398lm	90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K




PLASY

PROFILES

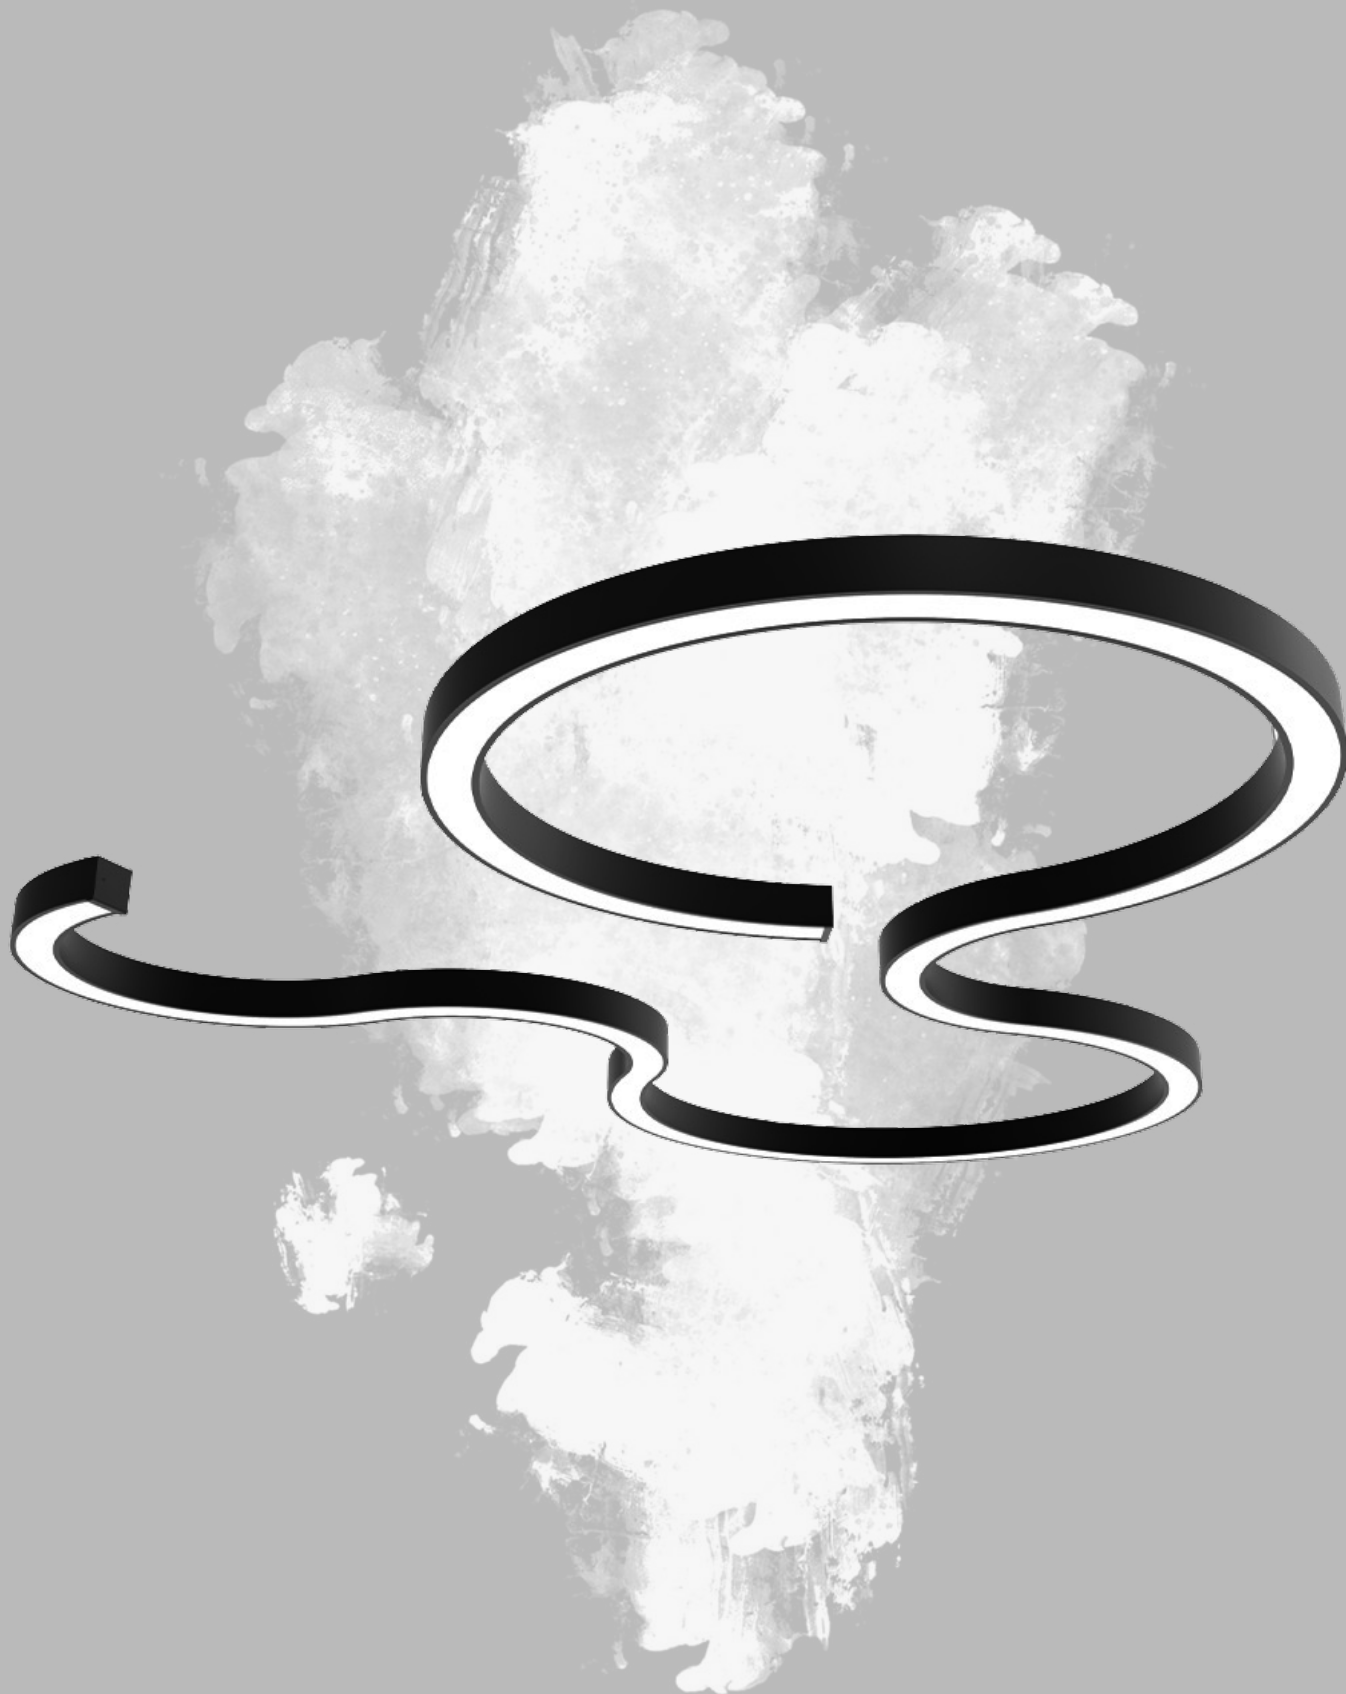

PLASY

PROFILES

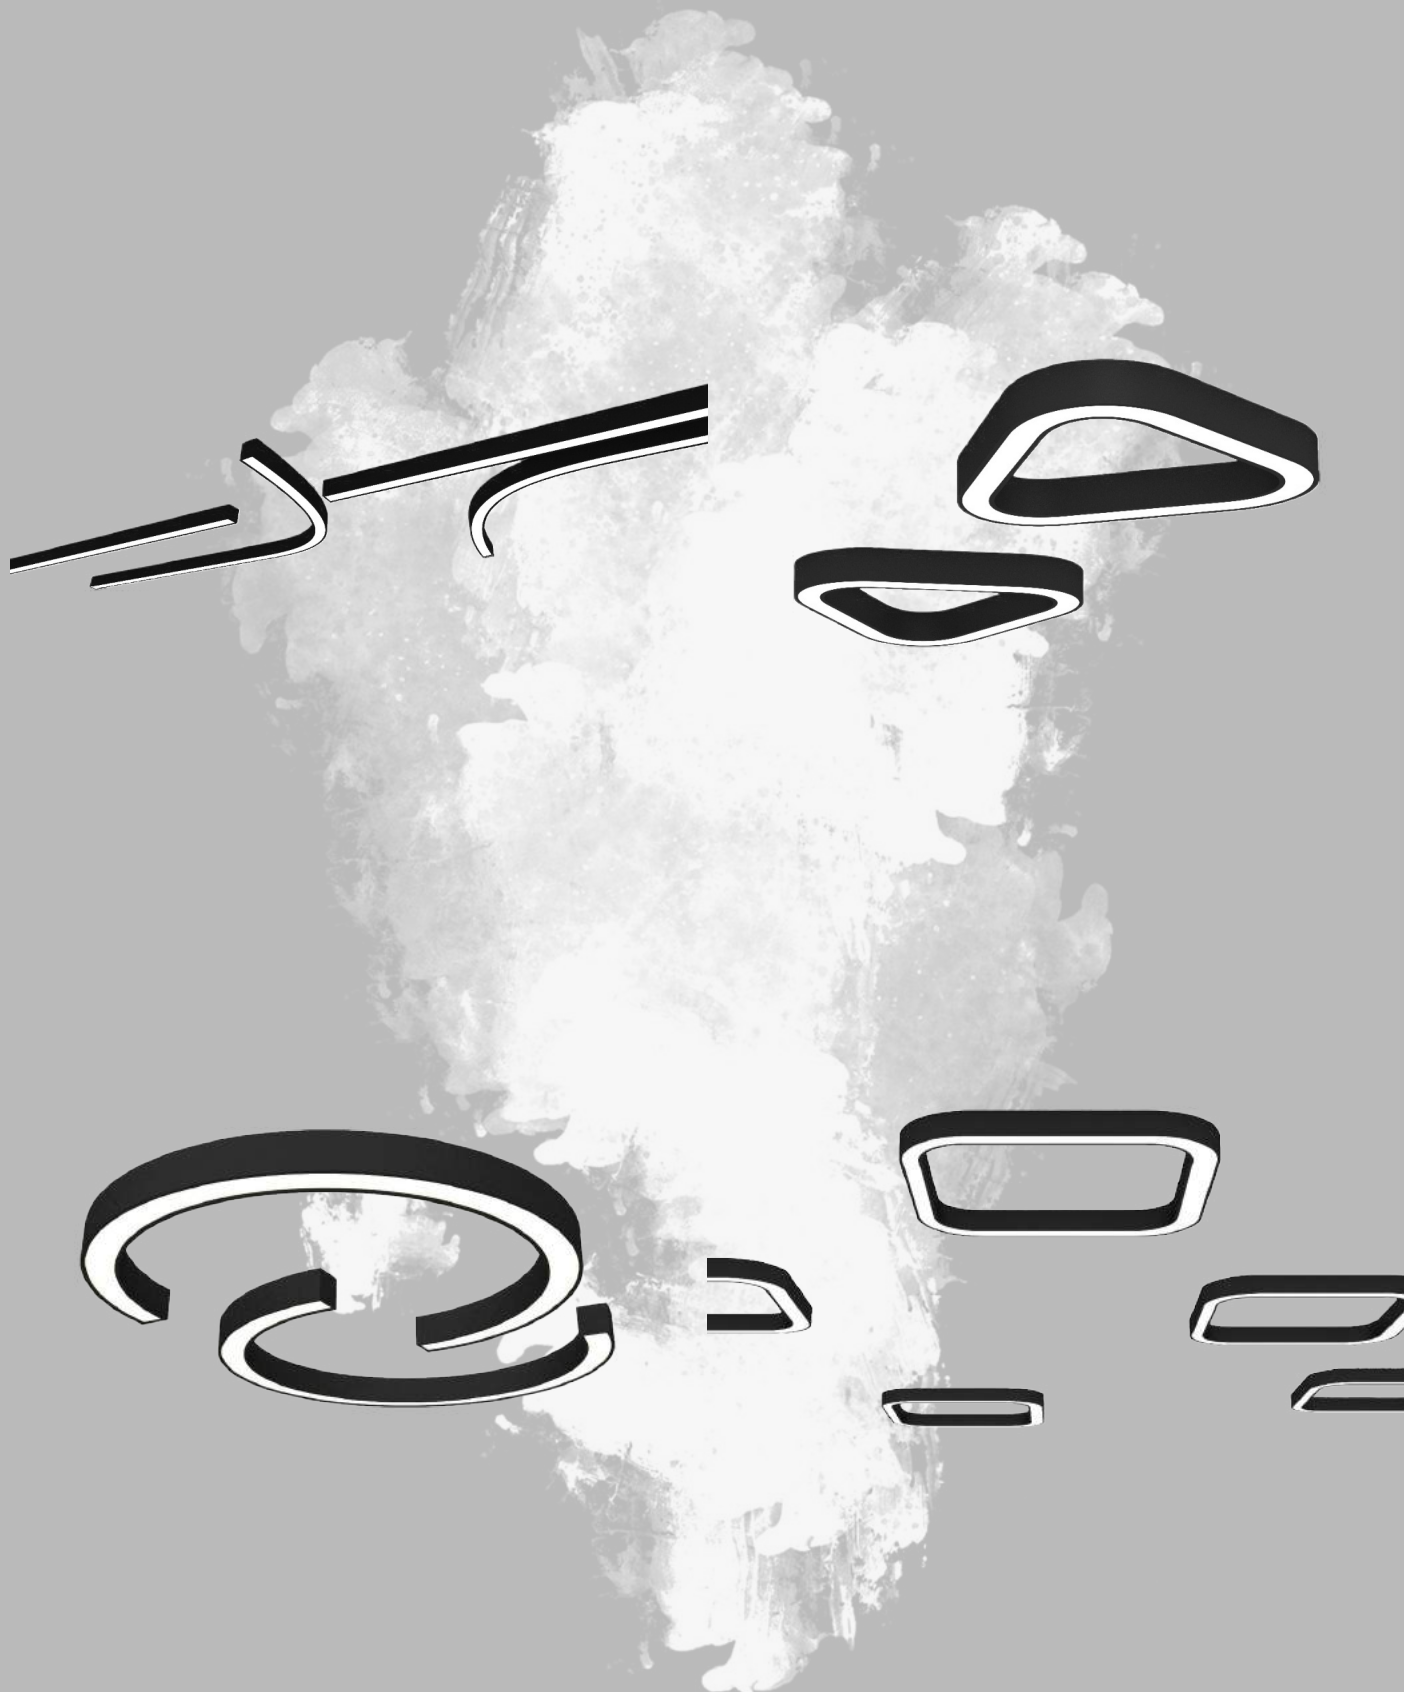







Surface / Pendant continuous curved linear luminaire complete with LED boards, opal diffuser and driver

IP20



220-240V
50-60Hz

LED

Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Tunable White available on request

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32117	32W/m - 3488lm	80	2700	110°	White	On-Off
	22W/m - 2398lm	90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K





Surface / Pendant continuous curved linear luminaire complete with LED boards, opal diffuser and driver



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Tunable White available on request

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant


Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32115	32W/m - 3488lm	80	2700	110°	White	On-Off
	22W/m - 2398lm	90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K




PARAL

PROFILES

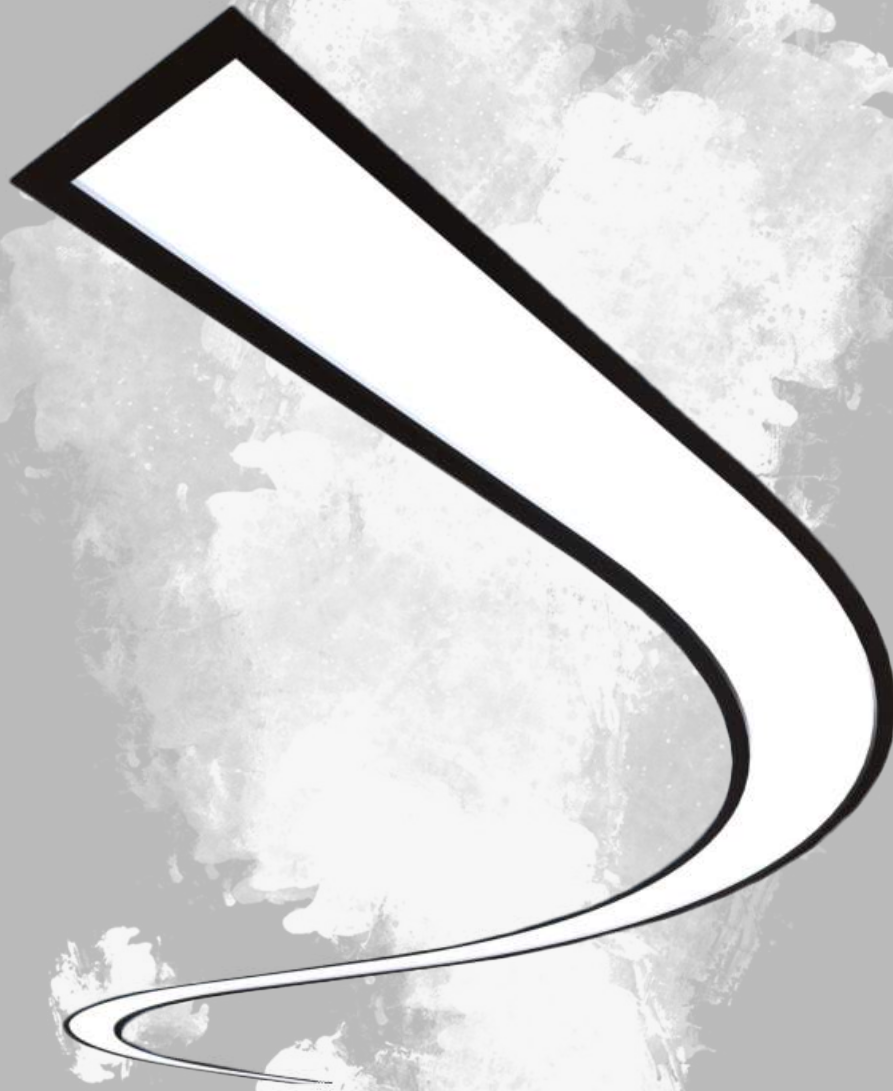

PARAL

PROFILES

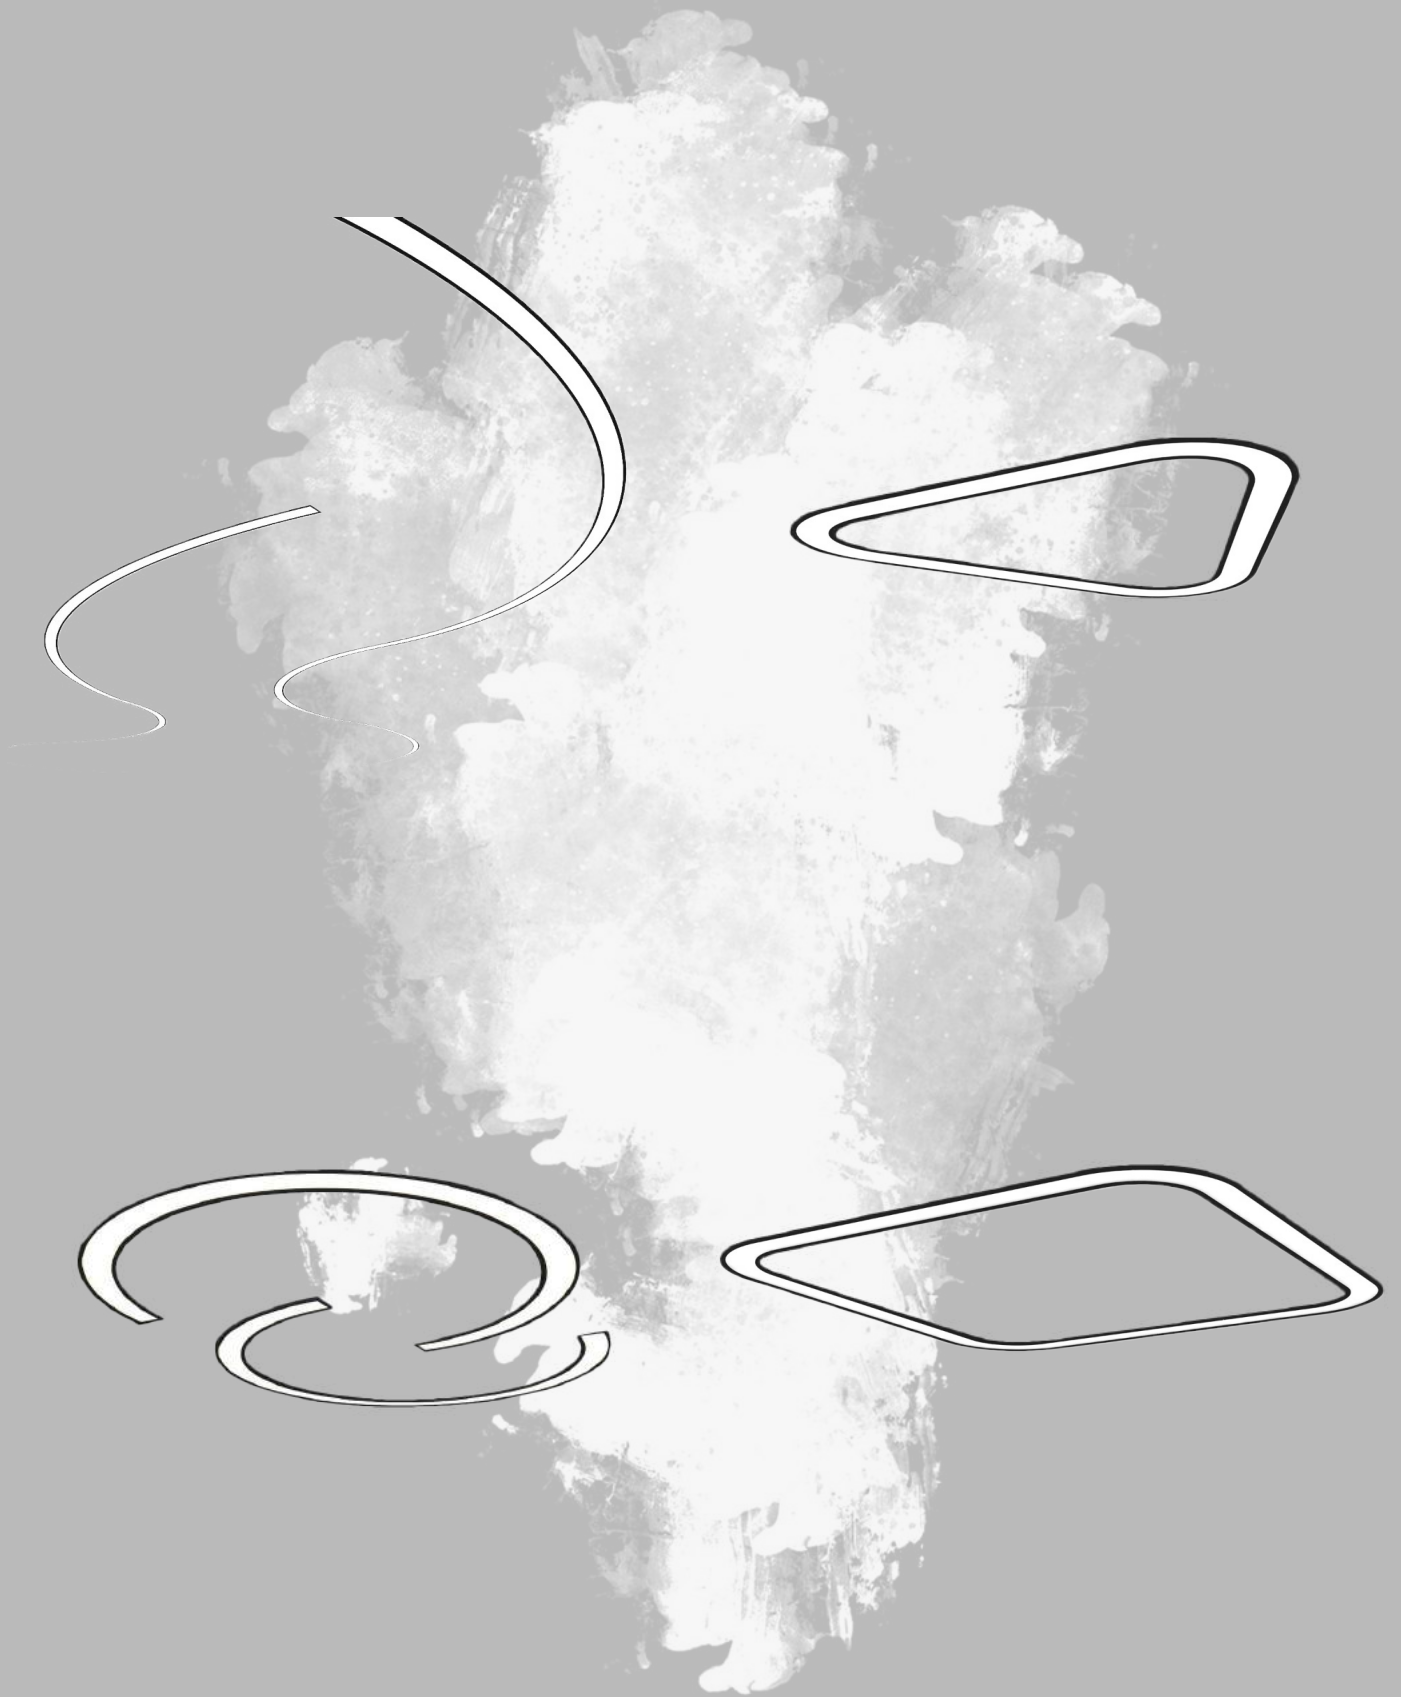






Paral V10 - 22117

Profiles

ALPANI

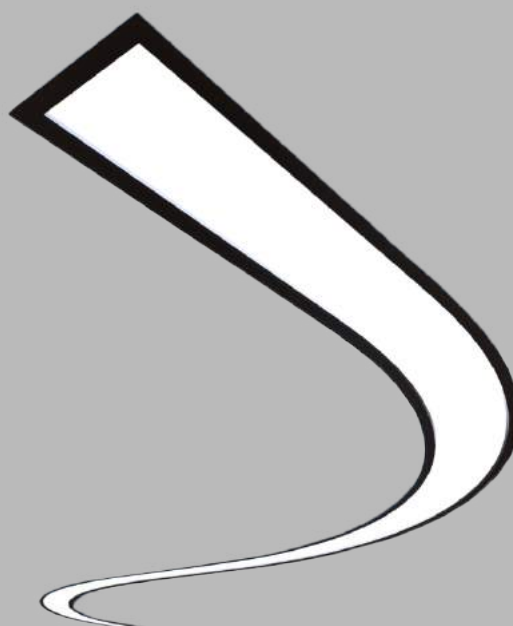

Recessed continuous curved linear luminaire complete with LED boards, opal diffuser and driver

IP20



FIXED
↓

220-240V
50-60Hz

LED

Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Tunable White available on request

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty


All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
22117	32W/m - 3488lm	80	2700	110°	White	On-Off
	22W/m - 2398lm	90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

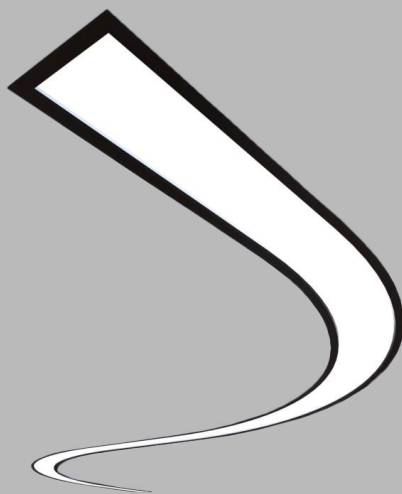

Recessed continuous curved linear luminaire complete with LED boards, opal diffuser and driver



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Tunable White available on request

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation


Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
22115	32W/m - 3488lm	80	2700	110°	White	On-Off
	22W/m - 2398lm	90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

OPTIMA


PROFILES

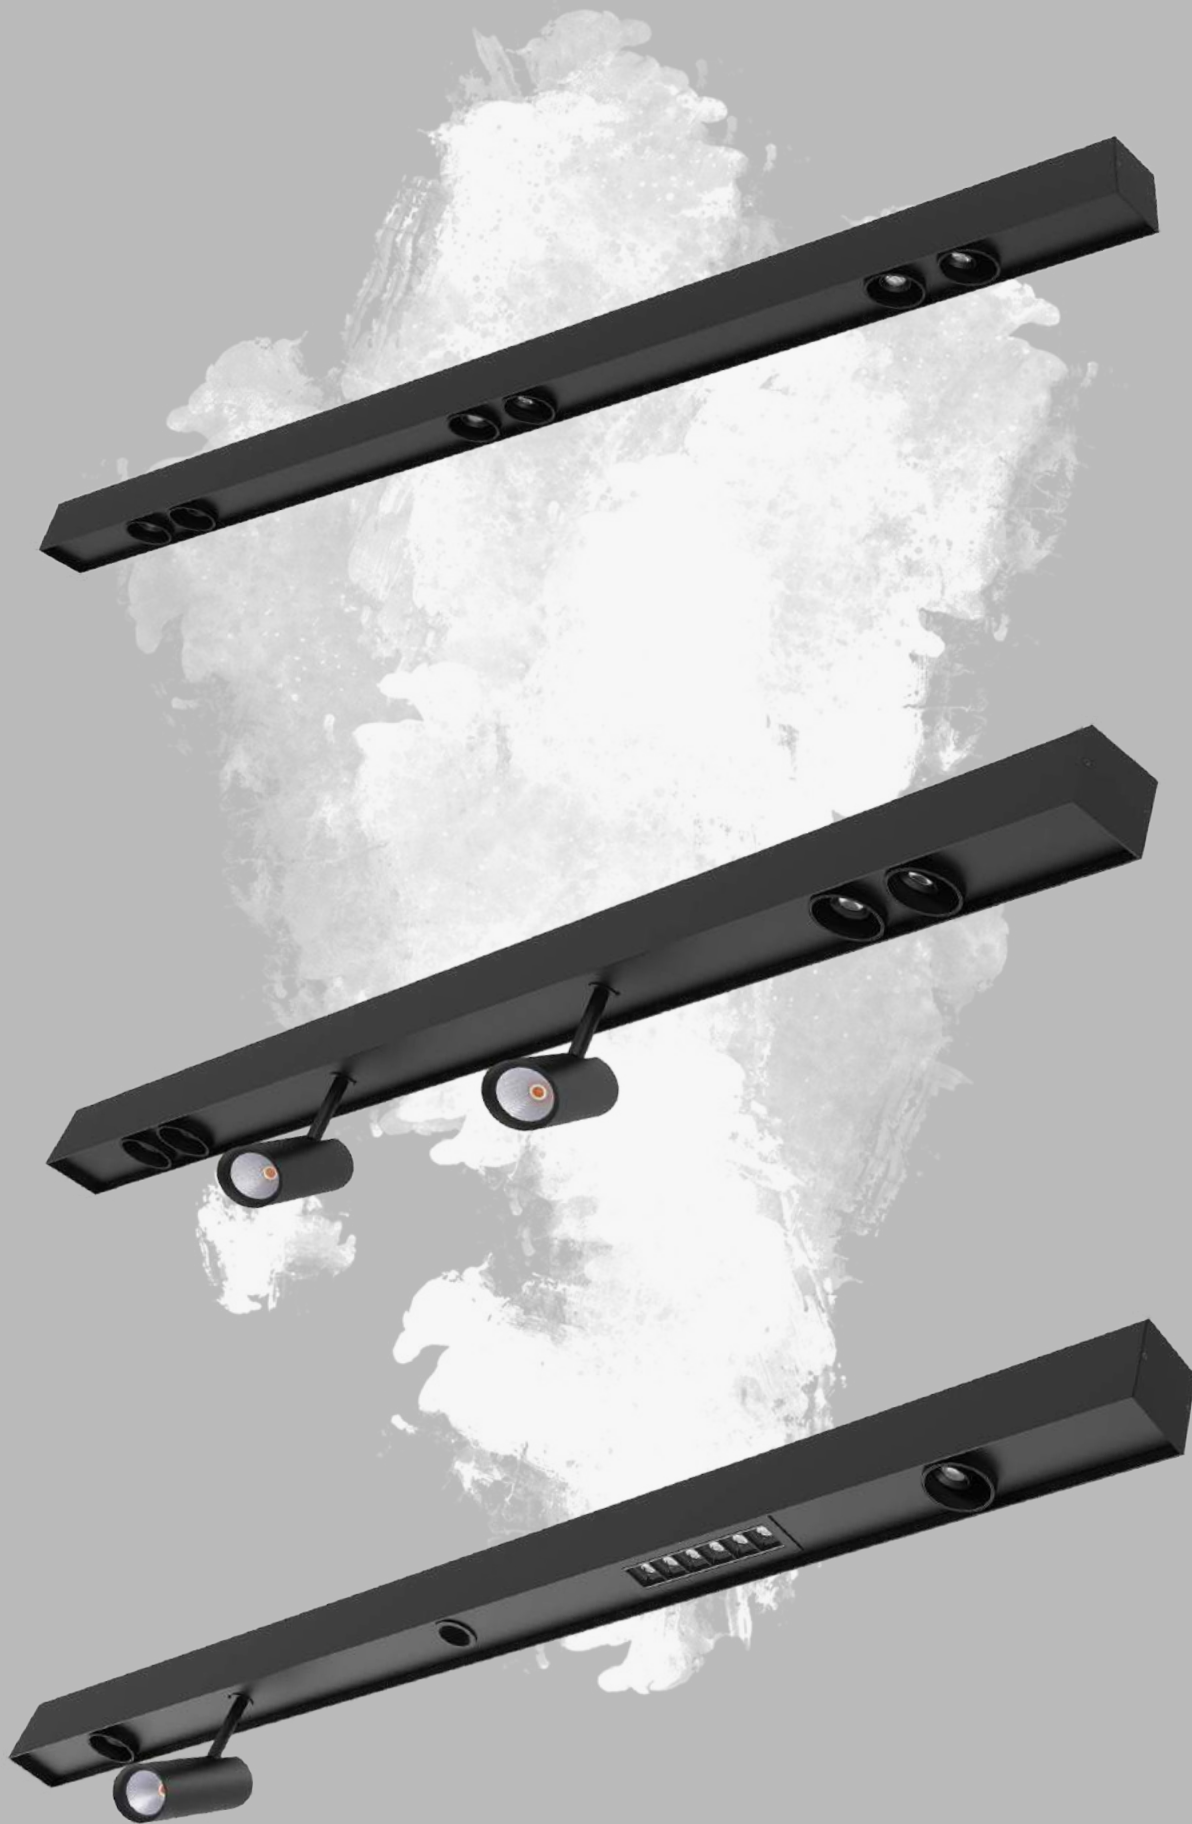

OPTIMA TRIMLESS

PROFILES



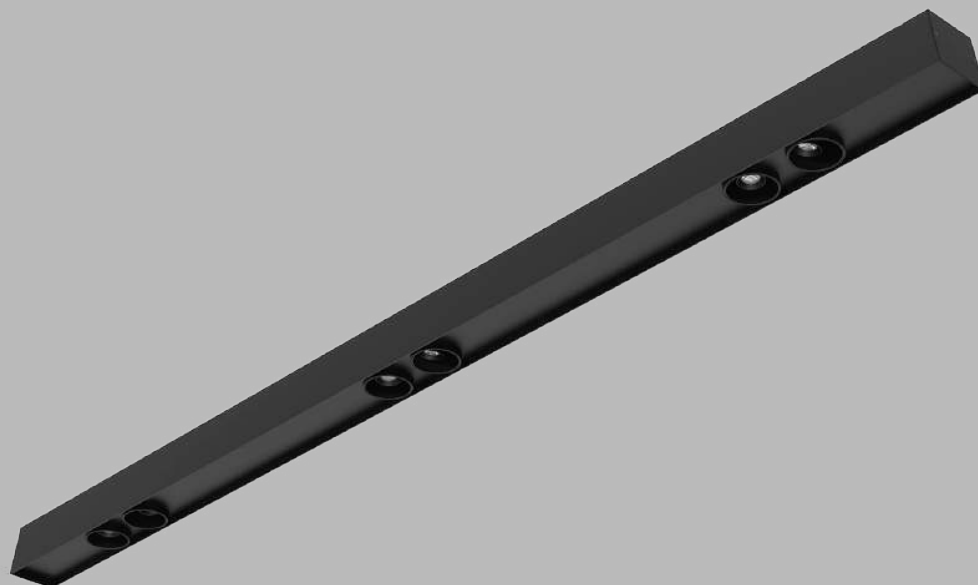

Surface / Pendant linear luminaire complete with spotlights. Different spot types can be placed on request. Custom lengths are available on request



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution



Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32141	30W (5Wx6) - 2850lm	80	2700	8°	White	On-Off
	15W (2,5Wx6) - 1425lm	90	3000	25°	Black	Dali
			4000	40°	Grey	
			5000	60°	Ral	

*Calculated with CRI80 - 4000K

Optima V2 - 32142

Profiles

ALPANI



Surface / Pendant linear luminaire complete with spotlights. Different spot types can be placed on request. Custom lengths are available on request



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution



Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32142	38W (5Wx4, 9Wx2) - 3610lm	80	2700	8°	White	On-Off
	24W (2,5Wx4, 7Wx2) - 2280lm	90	3000	25°	Black	Dali
			4000	40°	Grey	
			5000	60°	Ral	

*Calculated with CRI80 - 4000K

Optima V3 - 32143

Profiles

ALPANI



Surface / Pendant linear luminaire complete with spotlights. Different spot types can be placed on request. Custom lengths are available on request

IP20



FIXED
↓

220-240V
50-60Hz

LED

Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution



Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32143	35W (5Wx2, 9W, 13W, 3W) - 3325lm	80	2700	8°	White	On-Off
	26W (2,5Wx2, 7W, 13W, 1W) - 2470lm	90	3000	25°	Black	Dali
			4000	40°	Grey	
			5000	60°	Ral	

*Calculated with CRI80 - 4000K

Optima Trimless V1 - 22141

Profiles

ALPANI



Trimless recessed linear luminaire complete with spotlights. Different spot types can be placed on request. Custom lengths are available on request



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
22141	30W (5Wx6) - 2850lm	80	2700	8°	White	On-Off
	15W (2,5Wx6) - 1425lm	90	3000	25°	Black	Dali
			4000	40°	Grey	
			5000	60°	Ral	

*Calculated with CRI80 - 4000K

Optima Trimless V2 - 22142

Profiles

ALPANI



Trimless recessed linear luminaire complete with spotlights. Different spot types can be placed on request. Custom lengths are available on request



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

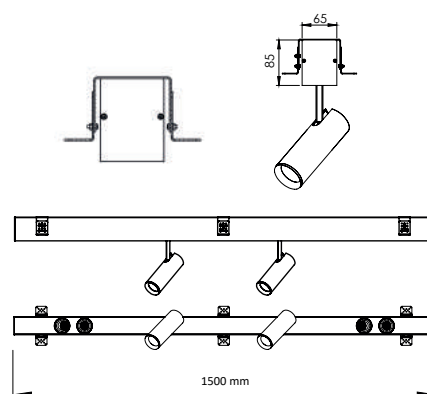

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
22142	38W (5Wx4, 9Wx2) - 3610lm	80	2700	8°	White	On-Off
	24W (2,5Wx4, 7Wx2) - 2280lm	90	3000	25°	Black	Dali
			4000	40°	Grey	
			5000	60°	Ral	

*Calculated with CRI80 - 4000K

Optima Trimless V3 - 22143

Profiles

ALPANI



Trimless recessed linear luminaire complete with spotlights. Different spot types can be placed on request. Custom lengths are available on request



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

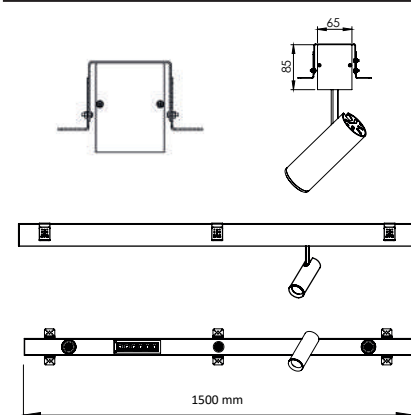

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
22143	35W (5Wx2, 9W, 13W, 3W) - 3325lm	80	2700	8°	White	On-Off
	26W (2,5Wx2, 7W, 13W, 1W) - 2470lm	90	3000	25°	Black	Dali
			4000	40°	Grey	
			5000	60°	Ral	

*Calculated with CRI80 - 4000K

OPTIMUS


PROFILES



Optimus - 32145

Profiles

ALPANI

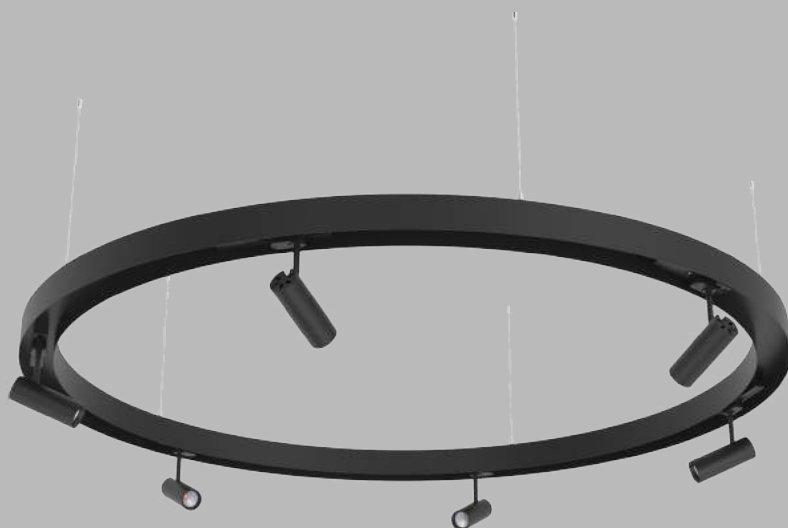

Surface / Pendant linear luminaire complete with spotlights. Different spot types can be placed on request. Custom diameters are available on request

IP20



ADJUSTABLE

220-240V
50-60Hz

LED

Materials

Profile and housings made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

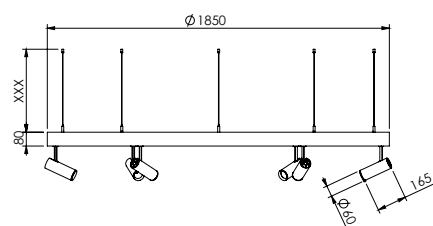

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Size - Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32145	54W (9Wx6) - 5508lm	80	2700	20°	White	On-Off
	42W (7Wx6) - 4284lm	90	3000	30°	Black	Dali
			4000	40°	Grey	
			5000	60°	Ral	

*Calculated with CRI80 - 4000K

ALTARIO

PROFILES





Surface / Pendant luminaire with direct / indirect option complete with LED boards, opal diffuser and driver. Custom diameters are available on request



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Tunable White available on request

Beam Angle

Wide flood distribution



Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Size - Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32127	Ø450 - 32W - 2770lm	80	2700	110°	White	On-Off
	Ø750 - 54W - 4610lm	90	3000		Black	Dali
	Ø1000 - 72W - 6140lm		4000		Grey	
	Ø1500 - 108W - 9210lm		5000		Ral	
	Ø2000 - 144W - 12280lm					

*Calculated with CRI80 - 4000K





Altario V8 - 32125

Profiles

ALPANI



Surface / Pendant luminaire with direct / indirect option complete with LED boards, opal diffuser and driver. Custom diameters are available on request

IP20



220-240V
50-60Hz

LED

Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Tunable White available on request

Beam Angle

Wide flood distribution



Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Size - Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32125	Ø450 - 32W - 2930lm	80	2700	110°	White	On-Off
	Ø750 - 54W - 4880lm	90	3000		Black	Dali
	Ø1000 - 72W - 6500lm		4000		Grey	
	Ø1500 - 108W - 9750lm		5000		Ral	
	Ø2000 - 144W - 13000lm					

*Calculated with CRI80 - 4000K



ARTONA

PROFILES



Artona V10 - 32137

Profiles

ALPANI



Surface / Pendant luminaire with direct / indirect option complete with LED boards, opal diffuser and driver. Custom diameters are available on request



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Tunable White available on request

Beam Angle

Wide flood distribution



Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Size - Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32137	Ø300 - 23W - 2300lm	80	2700	110°	White	On-Off
	Ø400 - 36W - 3600lm	90	3000		Black	Dali
	Ø600 - 60W - 6000lm		4000		Grey	
	Ø800 - 80W - 8000lm		5000		Ral	
	Ø1000 - 100W - 10000lm					

*Calculated with CRI80 - 4000K





Artona V8 - 32135

Profiles

ALPANI



Surface / Pendant luminaire with direct / indirect option complete with LED boards, opal diffuser and driver. Custom diameters are available on request



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Tunable White available on request

Beam Angle

Wide flood distribution



Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Size - Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32135	Ø300 - 23W - 2880lm	80	2700	110°	White	On-Off
	Ø400 - 36W - 4500lm	90	3000		Black	Dali
	Ø600 - 60W - 7500lm		4000		Grey	
	Ø800 - 80W - 10000lm		5000		Ral	
	Ø1000 - 100W - 12500lm					

*Calculated with CRI80 - 4000K



ARAK


PROFILES



Arak - 32162

Profiles

ALPANI

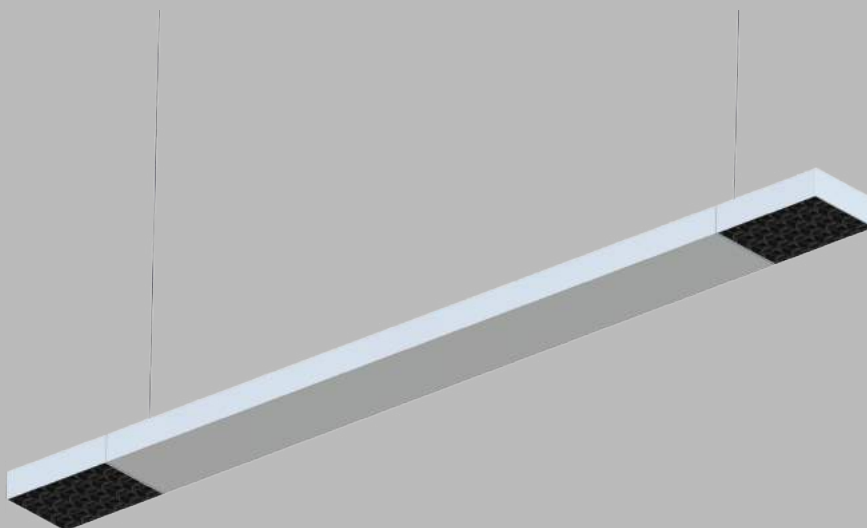

Pendant linear luminaire complete with spotlights. Custom lengths are available on request



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Pendant

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32162	76W - 7448lm	80	2700	20°	White	On-Off
	56W - 5488lm	90	3000	35°	Black	Dali
	32W - 3136lm		4000	45°	Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

KAVAL


PROFILES



Kaval V8 - 32156

Profiles

ALPANI

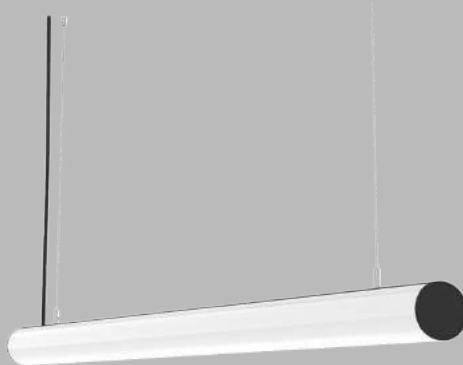

Pendant linear luminaire complete with LED boards, opal diffuser and driver



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

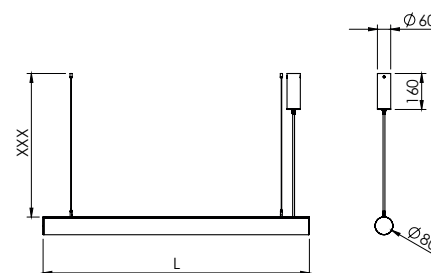

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Pendant

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32156	32W/m - 3488lm	80	2700	150°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K



Kaval V4 - 32154

Profiles

ALPANI



Pendant linear luminaire complete with LED boards, opal diffuser and driver



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

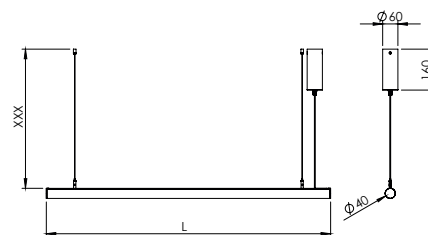

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Pendant

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32154	22W/m - 2398lm	80	2700	150°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K



TRACKLIGHT

84	DURU
92	BUSE
100	KADRA
108	NEROM
112	GLORIA
115	TRACK SYSTEM

DURU

TRACKLIGHT



Duru Maxi - 10107

Tracklight

ALPANI



Track mounted fully adjustable tracklight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10107	28W - 4004lm	80	2700	20°	White	On-Off
	24W - 3432lm	90	3000	30°	Black	Dali
	20W - 2860lm		4000	40°	Grey	Wireless
	15W - 2145lm		5000	60°	Ral	

*Calculated with CRI80 - 4000K





Duru Midi - 10105

Tracklight

ALPANI



Track mounted fully adjustable tracklight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10105	22W - 3146lm	80	2700	20°	White	On-Off
	20W - 2860lm	90	3000	35°	Black	Dali
	15W - 2145lm		4000	45°	Grey	Wireless
	10W - 1430lm		5000		Ral	

*Calculated with CRI80 - 4000K



ASSAL S
GLUCO
1,55

Duru Mini - 10103

Tracklight

ALPANI



Track mounted fully adjustable tracklight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10103	14W - 2002lm	80	2700	20°	White	On-Off
	10W - 1430lm	90	3000	35°	Black	Dali
	7W - 1001lm		4000	45°	Grey	Wireless
	4W - 572lm		5000		Ral	

*Calculated with CRI80 - 4000K



BUSE

TRACKLIGHT



Buse Maxi - 10116

Tracklight

ALPANI



Track mounted fully adjustable tracklight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10116	31W - 4340lm	80	2700	20°	White	On-Off
	28W - 3920lm	90	3000	35°	Black	Dali
	24W - 3360lm		4000	45°	Grey	Wireless
	20W - 2800lm		5000		Ral	

*Calculated with CRI80 - 4000K



Buse Midi - 10114

Tracklight

ALPANI



Track mounted fully adjustable tracklight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10114	24W - 3120lm	80	2700	20°	White	On-Off
	20W - 2600lm	90	3000	30°	Black	Dali
	15W - 1950lm		4000	40°	Grey	Wireless
	10W - 1300lm		5000		Ral	

*Calculated with CRI80 - 4000K





Buse Mini - 10112

Tracklight

ALPANI



Track mounted fully adjustable tracklight complete with LED module, reflector and driver

IP20



ADJUSTABLE

220-240V
50-60Hz

LED

Materials

Housing & reflector made of aluminium,
track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700,
3000, 4000 and 5000K
Special solutions for meat, fish and bakery
available on request

Beam Angle

High efficient optic with narrow, medium
and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring
available on request

Operating Conditions

Designed with best possible shape to
provide optimal heat dissipation both on
LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year
limited guarantee
A qualified electrician must ensure proper
installation of the product

Installation

Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10112	15W - 1650lm	80	2700	20°	White	On-Off
	10W - 1100lm	90	3000	30°	Black	Dali
	7W - 770lm		4000	50°	Grey	Wireless
	4W - 440lm		5000		Ral	

*Calculated with CRI80 - 4000K



KADRA

TRACKLIGHT



Kadra 4x6 V2 - 10126

Tracklight

ALPANI



Track mounted fully adjustable tracklight complete with LED module, lens and driver



Materials

Housing made of aluminium, lens made from PMMA, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for antiglare mask available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

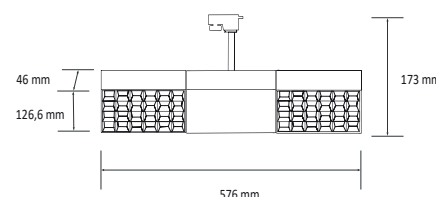

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10126	76W - 7448lm	80	2700	20°	White	On-Off
	56W - 5488lm	90	3000	35°	Black	Dali
	32W - 3136lm		4000	45°	Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K



Kadra 4x6 - 10125

Tracklight

ALPANI



Track mounted fully adjustable tracklight complete with LED module, lens and driver



Materials

Housing made of aluminium, lens made from PMMA, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for antiglare mask available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

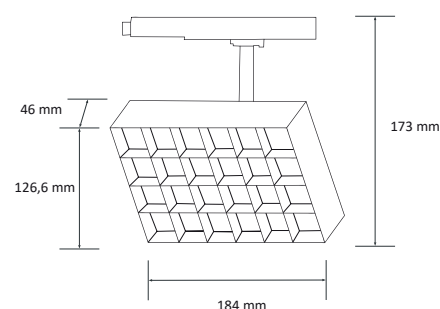

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10125	38W - 3724lm	80	2700	20°	White	On-Off
	28W - 2744lm	90	3000	35°	Black	Dali
	16W - 1568lm		4000	45°	Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K



Kadra 4x3 V2 - 10124

Tracklight

ALPANI



Track mounted fully adjustable tracklight complete with LED module, lens and driver



Materials

Housing made of aluminium, lens made from PMMA, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for antiglare mask available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

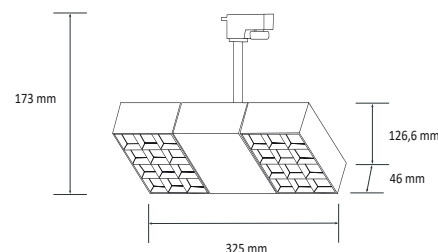

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10124	38W - 3724lm	80	2700	20°	White	On-Off
	28W - 2744lm	90	3000	35°	Black	Dali
	16W - 1568lm		4000	45°	Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

Kadra 4x3 - 10123

Tracklight

ALPANI



Track mounted fully adjustable tracklight complete with LED module, lens and driver



Materials

Housing made of aluminium, lens made from PMMA, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for antiglare mask available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

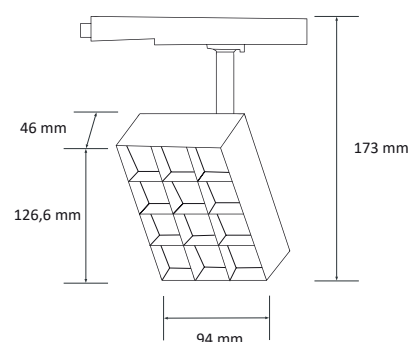

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10123	19W - 1862lm	80	2700	20°	White	On-Off
	14W - 1372lm	90	3000	35°	Black	Dali
	8W - 784lm		4000	45°	Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K



NEROM

TRACKLIGHT



Nerom Maxi - 10138

Tracklight

ALPANI



Track mounted fully adjustable tracklight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

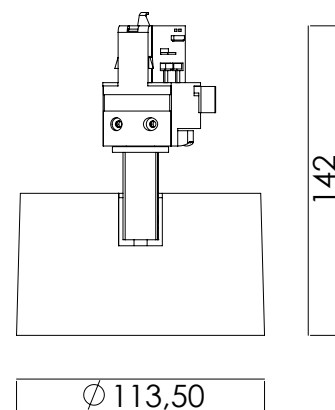

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10138	18W - 2550lm	80	2700	24°	White	On-Off
		90	3000	34°	Black	Dali
			4000	48°	Grey	Wireless
			5000		Ral	

*Calculated with CRI80 - 4000K

Nerom Midi - 10136

Tracklight

ALPANI



Track mounted fully adjustable tracklight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

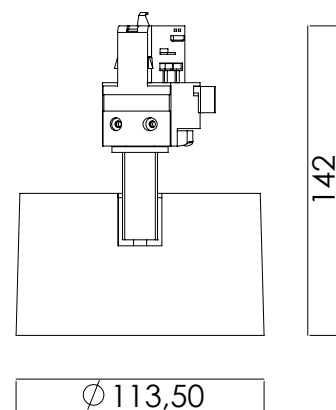

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10136	12W - 1700lm	80	2700	24°	White	On-Off
		90	3000	34°	Black	Dali
			4000	48°	Grey	Wireless
			5000		Ral	

*Calculated with CRI80 - 4000K

Nerom Mini - 10134

Tracklight

ALPANI



Track mounted fully adjustable tracklight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

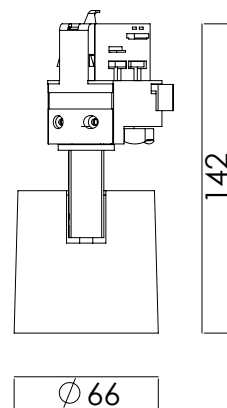

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10134	6W - 850lm	80	2700	24°	White	On-Off
		90	3000	34°	Black	Dali
			4000	48°	Grey	Wireless
			5000		Ral	

*Calculated with CRI80 - 4000K

GLORIA

TRACKLIGHT



Gloria - 10145

Tracklight

ALPANI



Track mounted fully adjustable tracklight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium, track adaptor made from thermoplastic

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Track

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
10145	31W - 4340lm	80	2700	20°	White	On-Off
	28W - 3920lm	90	3000	30°	Black	Dali
	24W - 3360lm		4000	40°	Grey	Wireless
	20W - 2800lm		5000	60°	Ral	


*Calculated with CRI80 - 4000K



Track System

Tracklight

ALPANI

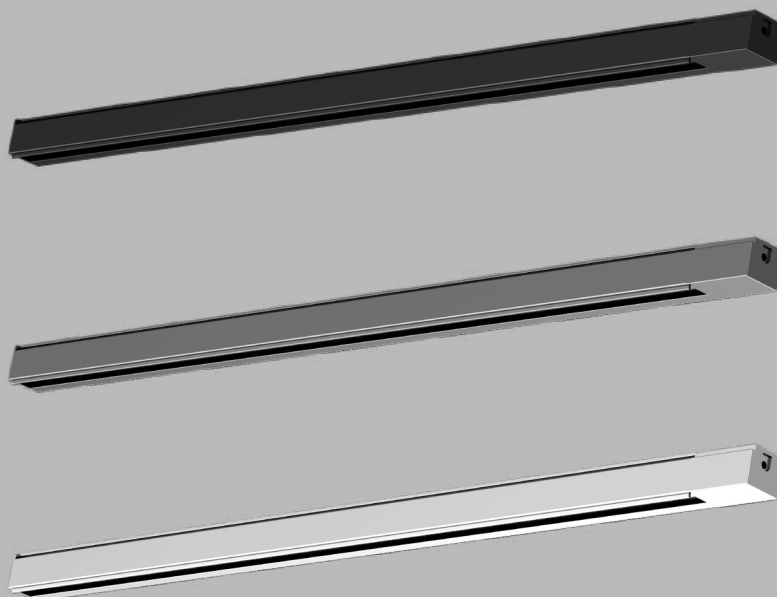

3-Circuit Surface Track	
Code	Description
90901	1m White
90902	1m Black
90903	1m Grey
90904	2m White
90905	2m Black
90906	2m Grey
90907	3m White
90908	3m Black
90909	3m Grey

3-Circuit Recessed Track	
Code	Description
90911	1m White
90912	1m Black
90913	1m Grey
90914	2m White
90915	2m Black
90916	2m Grey
90917	3m White
90918	3m Black
90919	3m Grey

3-Circuit Surface Dali Track	
Code	Description
90941	1m White
90942	1m Black
90943	1m Grey
90944	2m White
90945	2m Black
90946	2m Grey
90947	3m White
90948	3m Black
90949	3m Grey

3-Circuit Recessed Dali Track	
Code	Description
90951	1m White
90952	1m Black
90953	1m Grey
90954	2m White
90955	2m Black
90956	2m Grey
90957	3m White
90958	3m Black
90959	3m Grey

3-Circuit	
Code	Description
90920	Live End White
90921	Live End Black
90922	Live End Grey
90923	End Cap White
90924	End Cap Black
90925	End Cap Grey
90926	Jointing Part White
90927	Jointing Part Black
90928	Jointing Part Grey
90929	Adjustable Corner White
90930	Adjustable Corner Black
90931	Adjustable Corner Grey
90932	T Part White
90933	T Part Black
90934	T Part Grey
90935	X Part White
90936	X Part Black
90937	X Part Grey
90938	Steel Suspension Kit



3-Circuit Dali	
Code	Description
90960	Live End White
90961	Live End Black
90962	Live End Grey
90963	End Cap White
90964	End Cap Black
90965	End Cap Grey
90966	Jointing Part White
90967	Jointing Part Black
90968	Jointing Part Grey
90969	Adjustable Corner White
90970	Adjustable Corner Black
90971	Adjustable Corner Grey
90972	T Part White
90973	T Part Black
90974	T Part Grey
90975	X Part White
90976	X Part Black
90977	X Part Grey
90938	Steel Suspension Kit



RECESSED

118 LEO
124 KOZA
130 RODEN
138 ECHO
142 RELLA
150 KUAL
156 AXA
162 VATOR
168 GOLAT
172 TAMPA
176 TRIMNO
182 FLAR
190 GALAR
198 HERA
204 LONIT

LEO

RECESSED



Leo Maxi - 21138

Recessed

ALPANI



Recessed adjustable spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

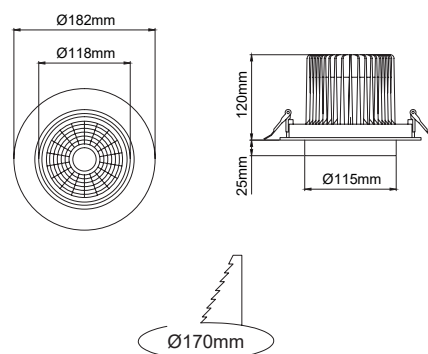

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21138	48W - 7008lm	80	2700	10°	White	On-Off
	42W - 6132lm	90	3000	20°	Black	Dali
	35W - 5110lm		4000	30°	Grey	Wireless
	31W - 4526lm		5000	40°	Ral	
				60°		

*Calculated with CRI80 - 4000K



Leo Midi - 21136

Recessed

ALPANI



Recessed adjustable spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

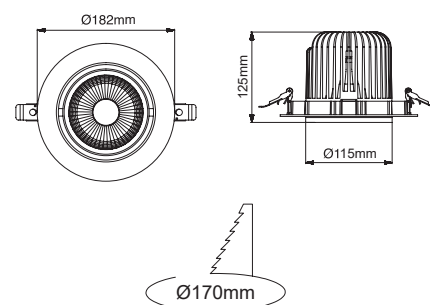

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21136	42W - 5586lm	80	2700	10°	White	On-Off
	35W - 4655lm	90	3000	20°	Black	Dali
	31W - 4123lm		4000	30°	Grey	Wireless
	28W - 3724lm		5000	40°	Ral	
				60°		

*Calculated with CRI80 - 4000K

Leo Mini - 21134

Recessed

ALPANI



Recessed adjustable spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

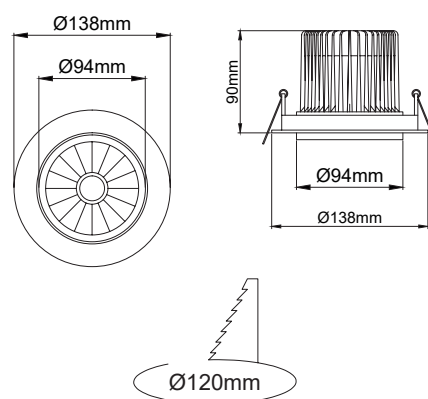

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21134	28W - 4032lm	80	2700	20°	White	On-Off
	24W - 3456lm	90	3000	30°	Black	Dali
	20W - 2880lm		4000	40°	Grey	Wireless
	15W - 2160lm		5000	60°	Ral	

*Calculated with CRI80 - 4000K



KOZA


RECESSED



Koza Maxi - 21147

Recessed

ALPANI

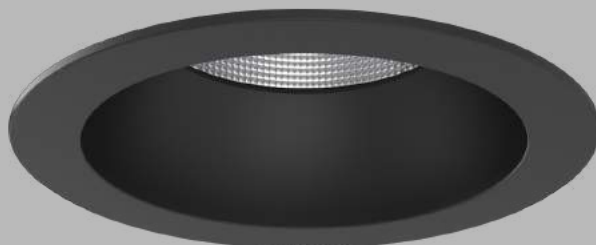

Recessed fixed spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

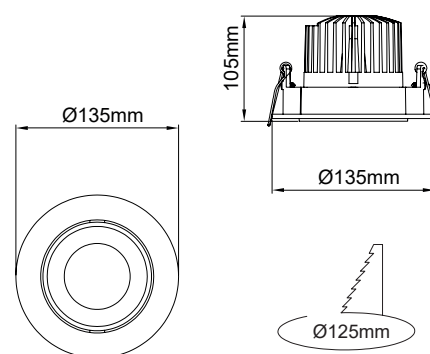

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21147	35W - 3920lm	80	2700	20°	White	On-Off
	28W - 3136lm	90	3000	30°	Black	Dali
	20W - 2240lm		4000	40°	Grey	
			5000	60°	Ral	


*Calculated with CRI80 - 4000K



Koza Midi - 21145

Recessed

ALPANI

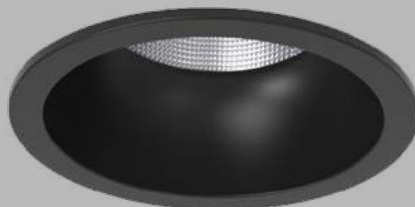

Recessed fixed spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

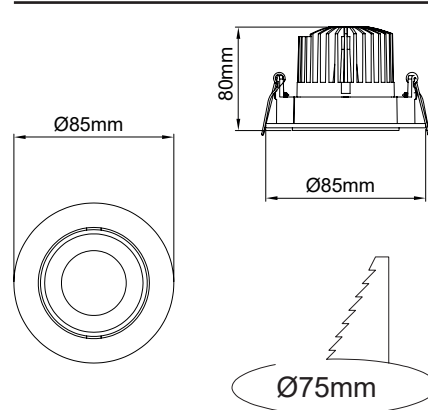

Warranty


All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21145	15W - 1526lm	80	2700	20°	White	On-Off
	10W - 981lm	90	3000	30°	Black	Dali
	7W - 763lm		4000	40°	Grey	
			5000	60°	Ral	

*Calculated with CRI80 - 4000K

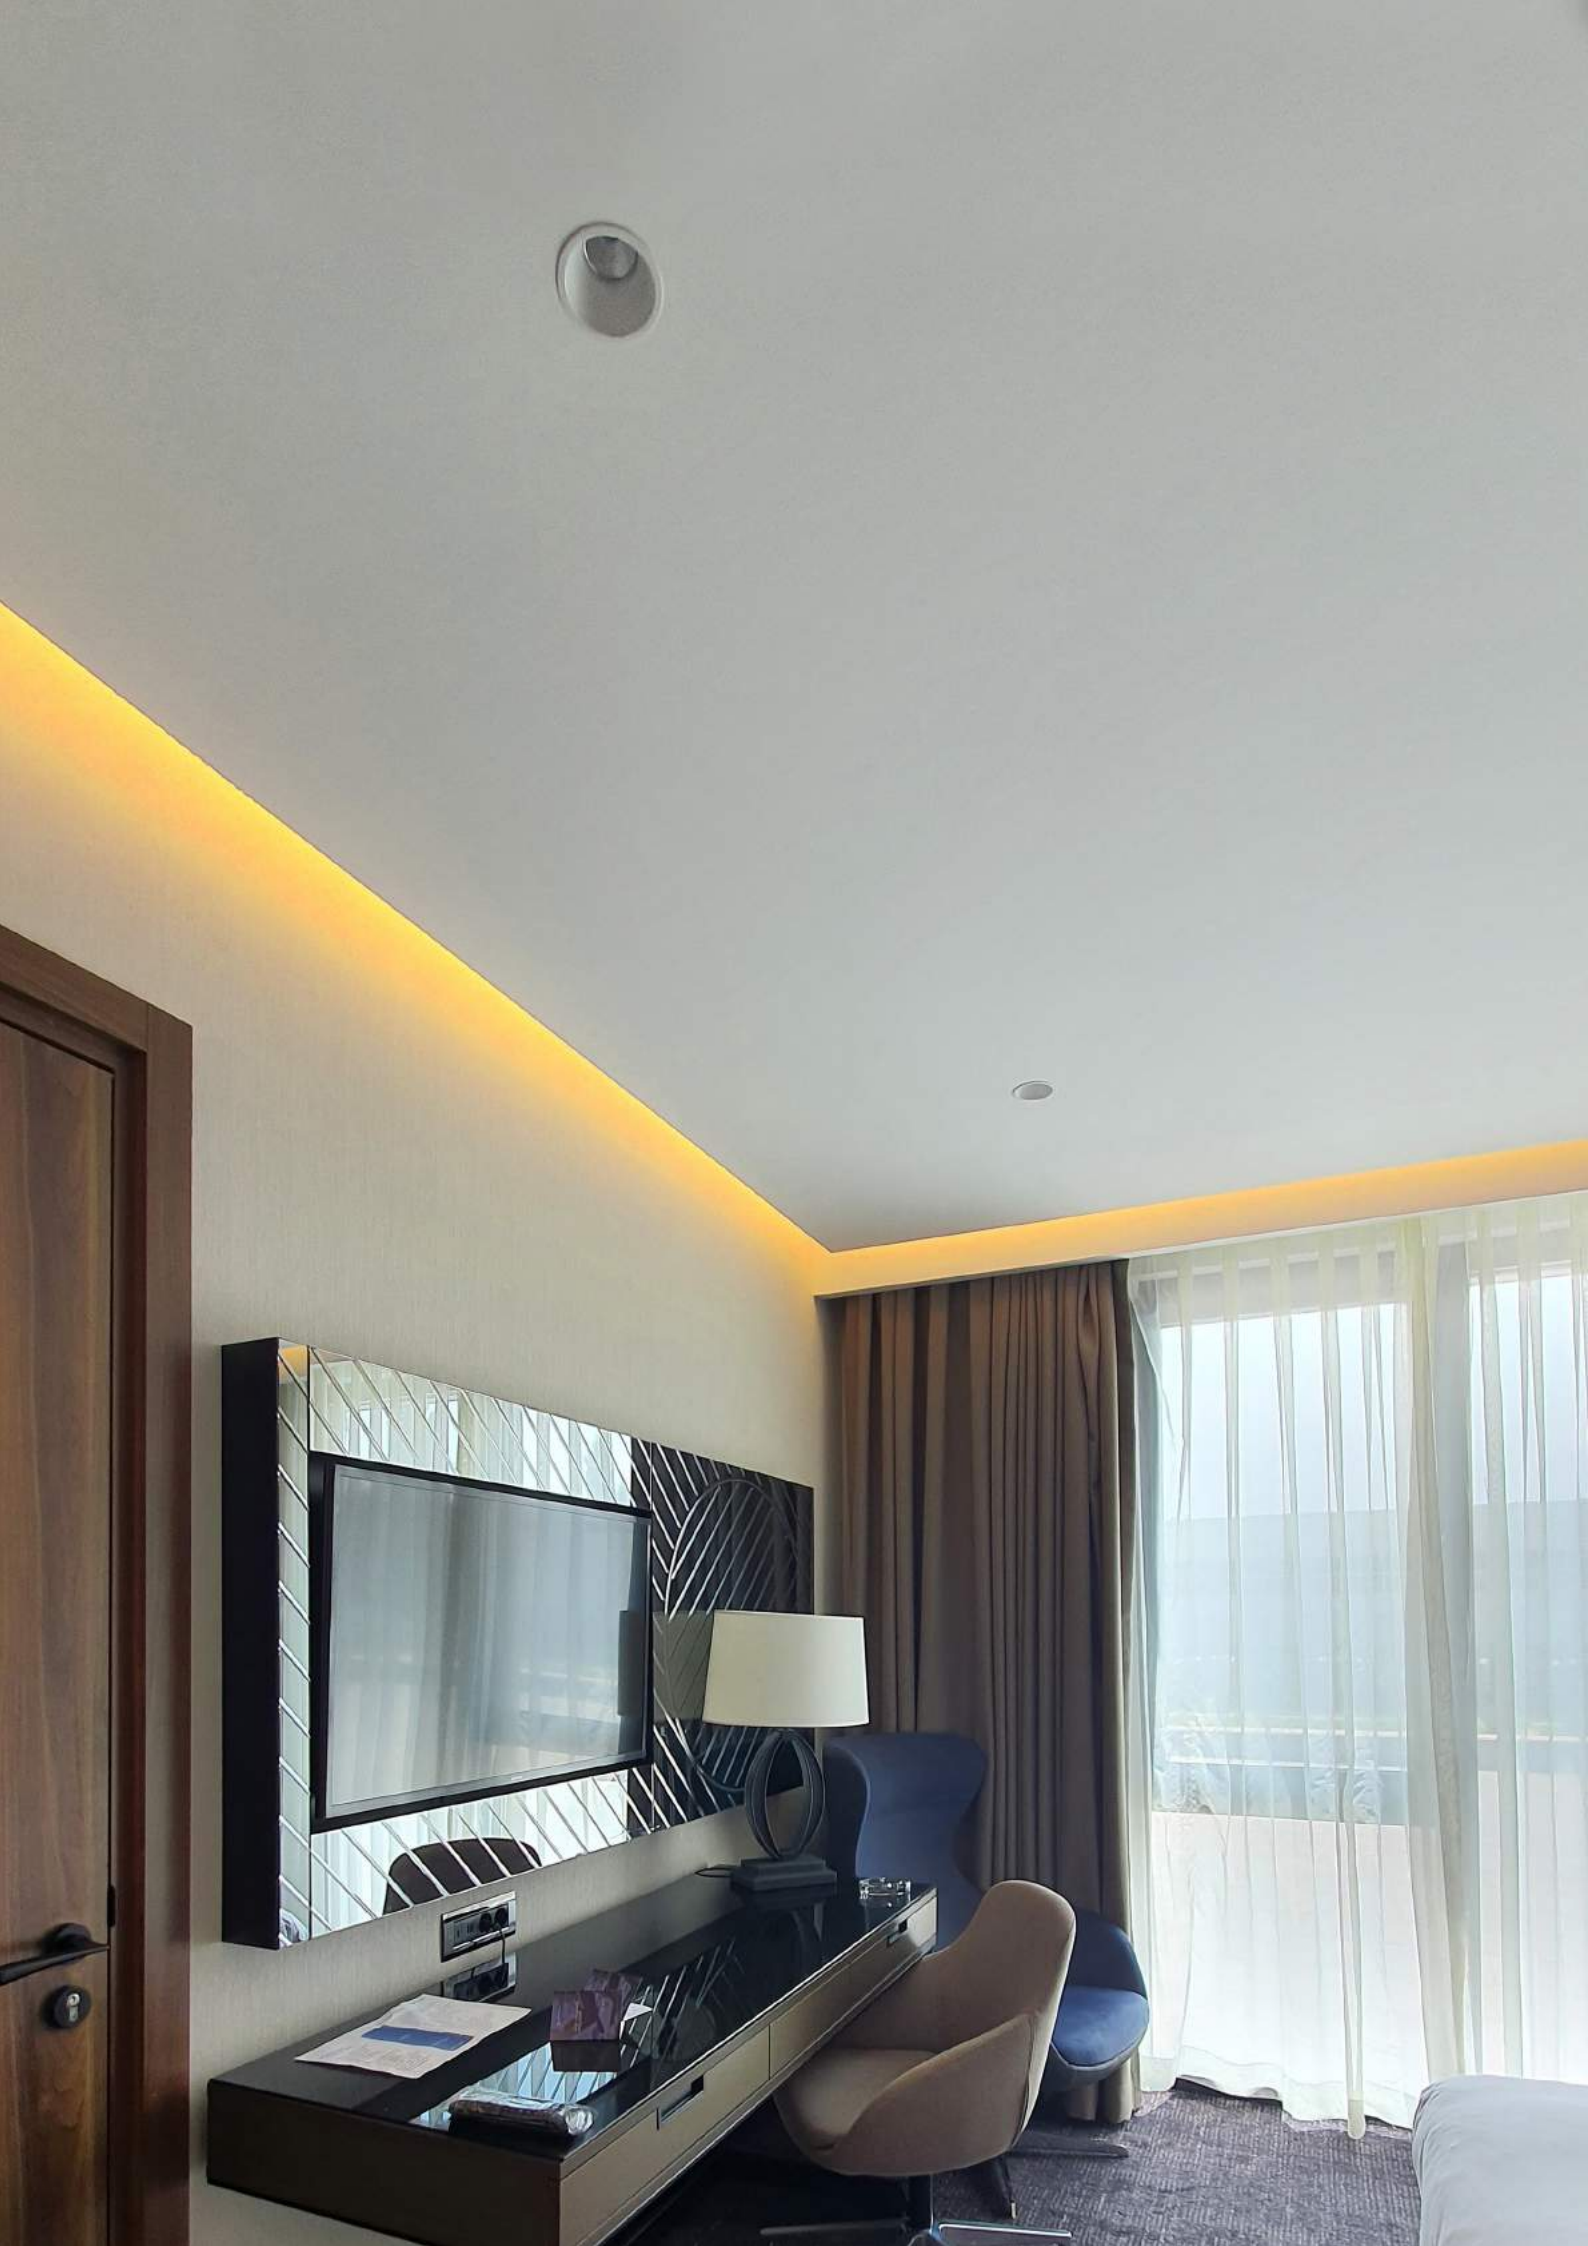

Koza Mini - 21143

Recessed

ALPANI



Recessed fixed spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

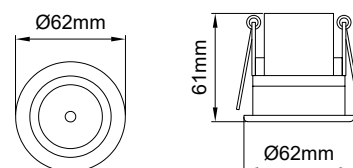


Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed



Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21143	7W - 784lm	80	2700	20°	White	On-Off
	4W - 448lm	90	3000	30°	Black	Dali
			4000	40°	Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

RODEN

RECESSED



Roden Maxi - 21121

Recessed

ALPANI



Recessed fully adjustable gimbal spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

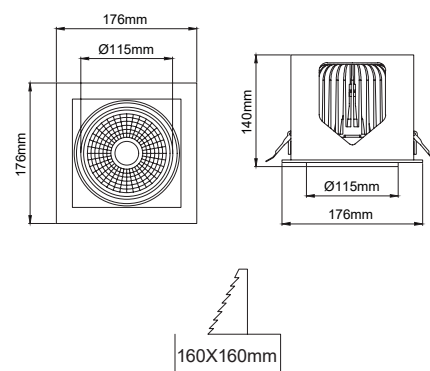

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21121	42W - 5544lm	80	2700	10°	White	On-Off
	35W - 4620lm	90	3000	20°	Black	Dali
	31W - 4092lm		4000	30°	Grey	Wireless
	28W - 3696lm		5000	40°	Ral	
				60°		

*Calculated with CRI80 - 4000K

Roden Maxi V2 - 21122

Recessed

ALPANI



Recessed fully adjustable gimbal spotlight complete with LED module, reflector and driver

IP20



ADJUSTABLE

220-240V
50-60Hz

LED

Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution




Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21122	84W - 11088lm	80	2700	10°	White	On-Off
	70W - 9240lm	90	3000	20°	Black	Dali
	62W - 8184lm		4000	30°	Grey	Wireless
	56W - 7392lm		5000	40°	Ral	
				60°		

*Calculated with CRI80 - 4000K

Roden Maxi V3 - 21123

Recessed

ALPANI



Recessed fully adjustable gimbal spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

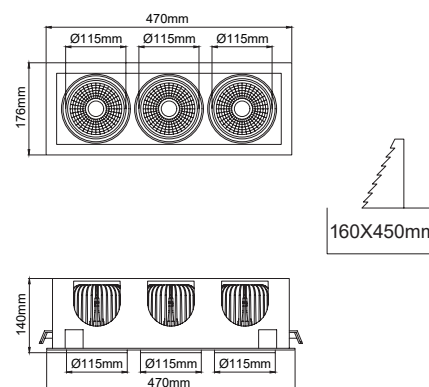

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21123	126W - 16632lm	80	2700	10°	White	On-Off
	105W - 13860lm	90	3000	20°	Black	Dali
	93W - 12276lm		4000	30°	Grey	Wireless
	84W - 11088lm		5000	40°	Ral	
				60°		

*Calculated with CRI80 - 4000K



Uygun Fiyatlı
ÜRÜNLER
burada!



ASANSÖR

Roden Midi - 21124

Recessed

ALPANI



Recessed fully adjustable gimbal spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

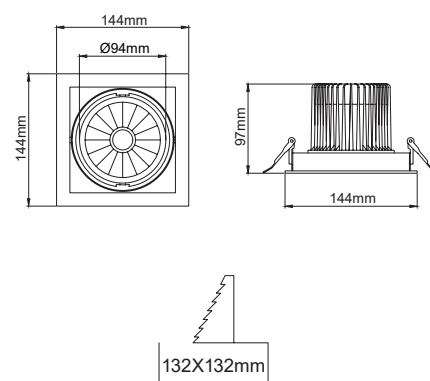

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21124	28W - 4004lm	80	2700	20°	White	On-Off
	24W - 3432lm	90	3000	30°	Black	Dali
	20W - 2860lm		4000	40°	Grey	Wireless
	15W - 2145lm		5000	60°	Ral	

*Calculated with CRI80 - 4000K

Roden Midi V2 - 21125

Recessed

ALPANI



Recessed fully adjustable gimbal spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

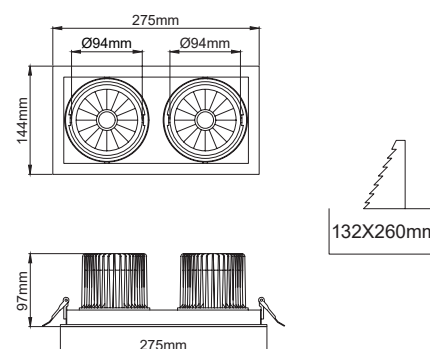

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21125	56W - 8008lm	80	2700	20°	White	On-Off
	48W - 6864lm	90	3000	30°	Black	Dali
	40W - 5720lm		4000	40°	Grey	Wireless
	30W - 4290lm		5000	60°	Ral	

*Calculated with CRI80 - 4000K

Roden Midi V3 - 21126

Recessed

ALPANI



Recessed fully adjustable gimbal spotlight complete with LED module, reflector and driver

IP20



ADJUSTABLE

220-240V
50-60Hz

LED

Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

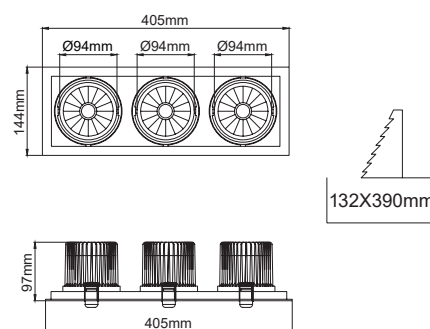

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation


Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21126	84W - 12012lm	80	2700	20°	White	On-Off
	72W - 10296lm	90	3000	30°	Black	Dali
	60W - 8580lm		4000	40°	Grey	Wireless
	45W - 6435lm		5000	60°	Ral	

*Calculated with CRI80 - 4000K

ECHO

RECESSED

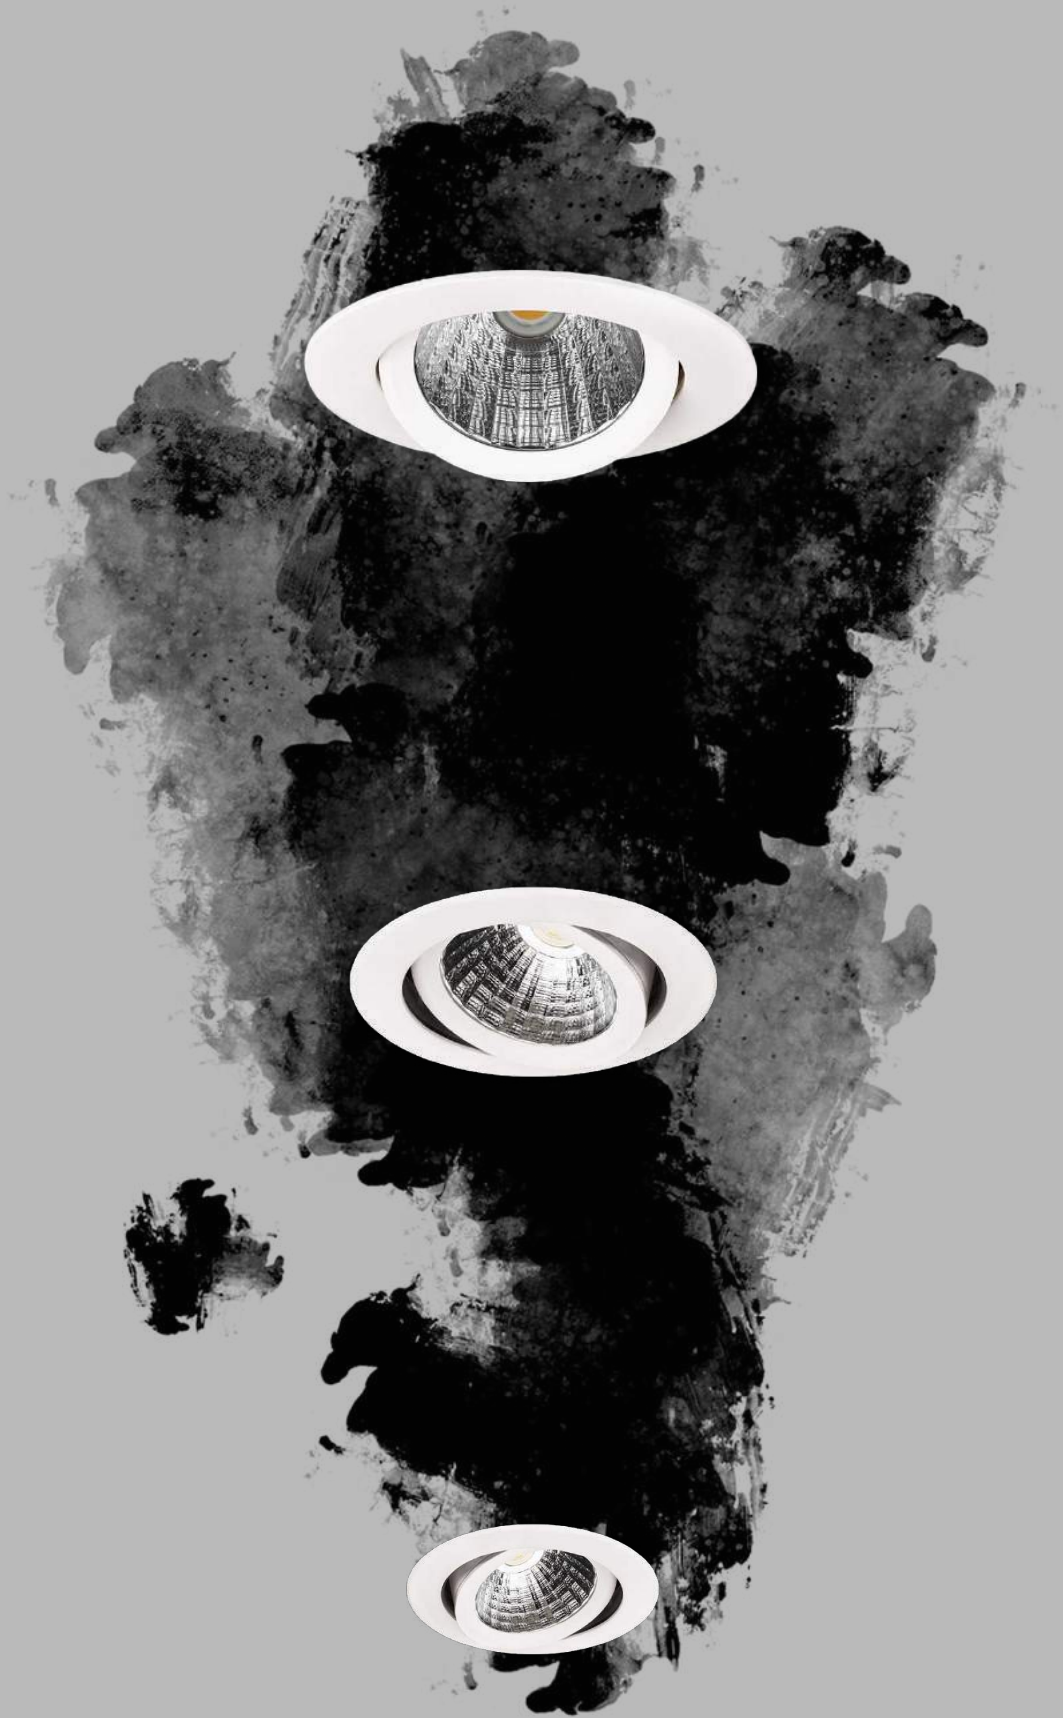

Echo Maxi - 21248

Recessed

ALPANI



Recessed adjustable spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

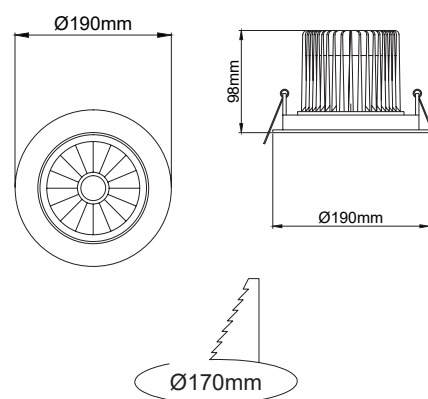

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed


Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21248	35W - 5110lm	80	2700	10°	White	On-Off
	30W - 4380lm	90	3000	20°	Black	Dali
			4000	30°	Grey	
			5000	40°	Ral	
				60°		

*Calculated with CRI80 - 4000K

Echo Midi - 21246

Recessed

ALPANI

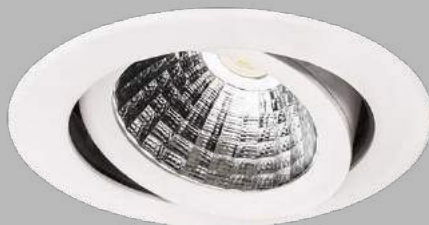

Recessed adjustable spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

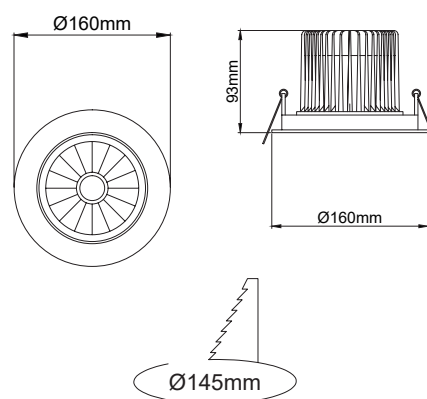

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21246	30W - 4380lm	80	2700	10°	White	On-Off
	20W - 2920lm	90	3000	20°	Black	Dali
			4000	30°	Grey	
			5000	40°	Ral	
				60°		

*Calculated with CRI80 - 4000K

Echo Mini - 21244

Recessed

ALPANI



Recessed adjustable spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

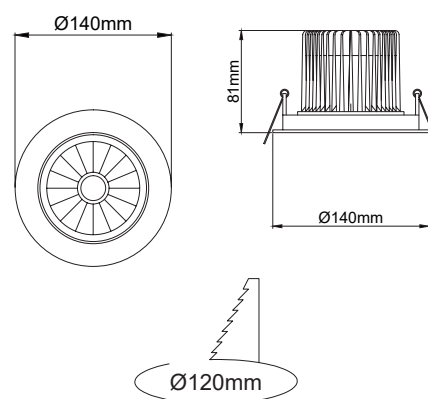

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21244	20W - 2920lm	80	2700	10°	White	On-Off
	15W - 2190lm	90	3000	20°	Black	Dali
			4000	30°	Grey	
			5000	40°	Ral	

*Calculated with CRI80 - 4000K

RELLA

RECESSED



Rella Maxi - 21251

Recessed

ALPANI



Recessed fully adjustable gimbal spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

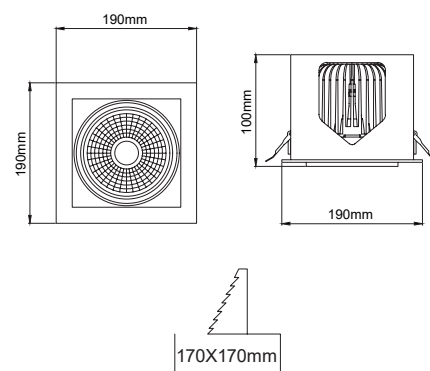

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21251	35W - 4620lm	80	2700	10°	White	On-Off
	30W - 3960lm	90	3000	20°	Black	Dali
			4000	30°	Grey	
			5000	40°	Ral	
				60°		

*Calculated with CRI80 - 4000K

Rella Maxi V2 - 21252

Recessed

ALPANI



Recessed fully adjustable gimbal spotlight complete with LED module, reflector and driver

IP20



ADJUSTABLE

220-240V
50-60Hz

LED

Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

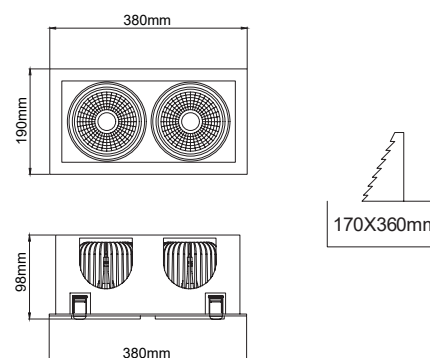

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21252	70W - 9240lm	80	2700	10°	White	On-Off
	60W - 7920lm	90	3000	20°	Black	Dali
			4000	30°	Grey	
			5000	40°	Ral	
				60°		

*Calculated with CRI80 - 4000K



BanYo

3 AL
2 ODE

Rella Midi - 21254

Recessed

ALPANI



Recessed fully adjustable gimbal spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

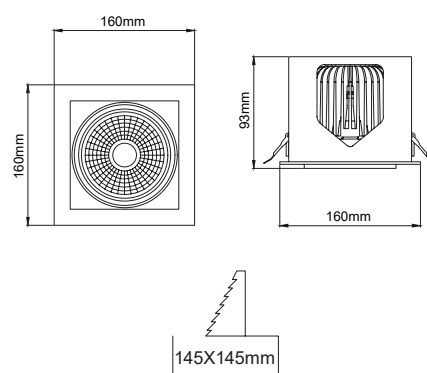

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21254	30W - 3960lm	80	2700	10°	White	On-Off
	20W - 2640lm	90	3000	20°	Black	Dali
			4000	30°	Grey	
			5000	40°	Ral	
				60°		

*Calculated with CRI80 - 4000K

Rella Midi V2 - 21255

Recessed

ALPANI



Recessed fully adjustable gimbal spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

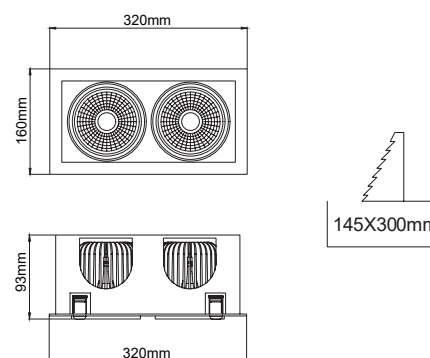

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21255	60W - 7920lm	80	2700	10°	White	On-Off
	40W - 5280lm	90	3000	20°	Black	Dali
			4000	30°	Grey	
			5000	40°	Ral	
				60°		

*Calculated with CRI80 - 4000K

Rella Mini - 21257

Recessed

ALPANI



Recessed fully adjustable gimbal spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

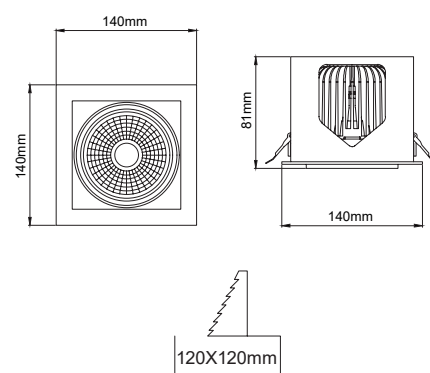

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21257	20W - 2640lm	80	2700	10°	White	On-Off
	15W - 1980lm	90	3000	20°	Black	Dali
			4000	30°	Grey	
			5000	40°	Ral	

*Calculated with CRI80 - 4000K

Rella Mini V2 - 21258

Recessed

ALPANI



Recessed fully adjustable gimbal spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

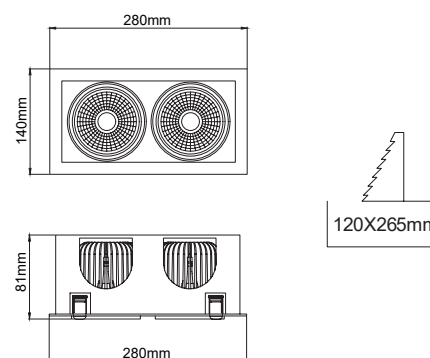

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21258	40W - 5280lm	80	2700	10°	White	On-Off
	30W - 3960lm	90	3000	20°	Black	Dali
			4000	30°	Grey	
			5000	40°	Ral	

*Calculated with CRI80 - 4000K

KUAL

RECESSED



Kual Mega - 21197

Recessed

ALPANI



Recessed fixed spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

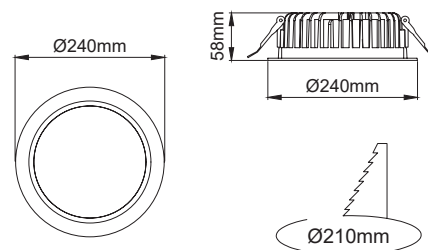

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21197	30W - 3360lm	80	2700	60°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

Kual Maxi - 21196

Recessed

ALPANI



Recessed fixed spotlight complete with LED module, reflector and driver

IP20



FIXED
↓

220-240V
50-60Hz

LED

Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution




Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21196	25W - 2800lm	80	2700	60°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

Kual Midi - 21195

Recessed

ALPANI



Recessed fixed spotlight complete with LED module, reflector and driver

IP20



FIXED
↓

220-240V
50-60Hz

LED

Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

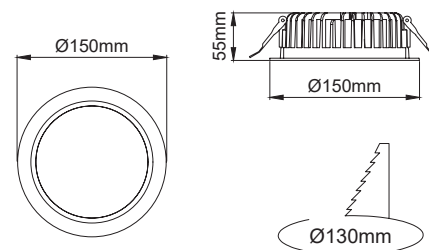

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21195	15W - 1680lm	80	2700	60°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

Kual Mini - 21194

Recessed

ALPANI



Recessed fixed spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

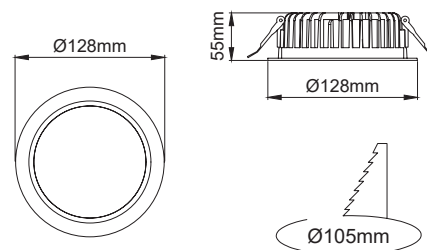

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21194	10W - 1120lm	80	2700	60°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

Kual Micro - 21193

Recessed

ALPANI



Recessed fixed spotlight complete with LED module, reflector and driver

IP20



FIXED
↓

220-240V
50-60Hz

LED

Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

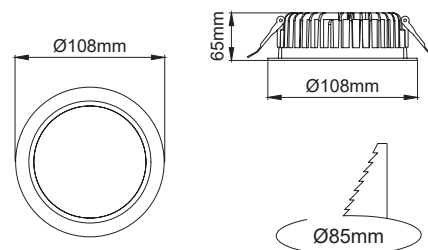

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21193	7W - 784lm	80	2700	60°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

AXA

RECESSED



Axa Maxi - 21107

Recessed

ALPANI



Recessed adjustable spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

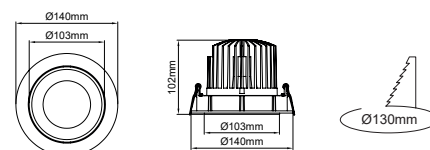

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21107	28W - 3472lm	80	2700	20°	White	On-Off
	24W - 2976lm	90	3000	35°	Black	Dali
	20W - 2480lm		4000	45°	Grey	Wireless
	15W - 1860lm		5000		Ral	

*Calculated with CRI80 - 4000K

Axa Midi - 21105

Recessed

ALPANI



Recessed adjustable spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21105	20W - 2480lm	80	2700	20°	White	On-Off
	15W - 1860lm	90	3000	30°	Black	Dali
	10W - 1240lm		4000	40°	Grey	Wireless
	7W - 868lm		5000		Ral	

*Calculated with CRI80 - 4000K



Axa Mini - 21103

Recessed

ALPANI



Recessed adjustable spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

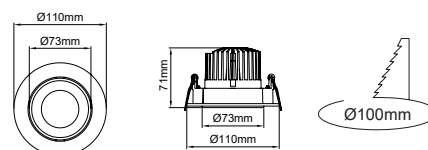

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21103	15W - 1860lm	80	2700	20°	White	On-Off
	10W - 1240lm	90	3000	40°	Black	Dali
	7W - 868lm		4000	60°	Grey	Wireless
			5000		Ral	

*Calculated with CRI80 - 4000K

Axa Micro - 21101

Recessed

ALPANI



Recessed adjustable spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

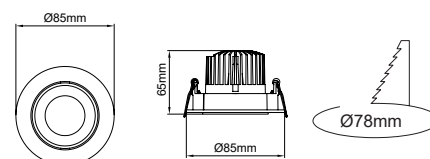

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21101	10W - 1240lm	80	2700	20°	White	On-Off
	7W - 868lm	90	3000	30°	Black	Dali
	4W - 496lm		4000	40°	Grey	
			5000	60°	Ral	

*Calculated with CRI80 - 4000K

VATOR

RECESSED



Vator Maxi - 21116

Recessed

ALPANI



Semi-recessed fully adjustable spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

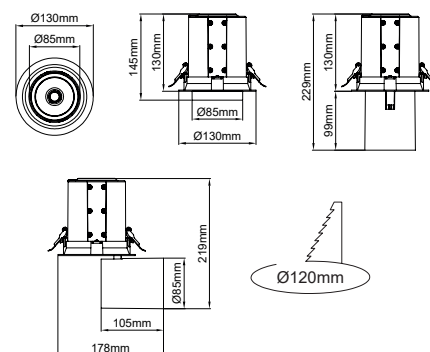

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21116	28W - 3472lm	80	2700	20°	White	On-Off
	24W - 2976lm	90	3000	35°	Black	Dali
	20W - 2480lm		4000	45°	Grey	Wireless
	15W - 1860lm		5000		Ral	

*Calculated with CRI80 - 4000K

ÇILGIN
FİYATLAR

İNDİRİM

ÇILGIN
FİYATLAR

İNDİRİM

Çocuk Montlar

399 TL

269 TL

TV
REKLAMI
ÜRÜNÜ



BABY

ERKEK

BO

İNDİRİM

KONSEPT

ÖDEME
NOKTASI

CASH
POINT

İNDİRİM

ÇILGIN
FİYATLAR

KARŞIYAMA

133.

99

69

ÇILGIN FİYATLAR

Çocuk Montları

129 TL

89.99 TL



26

80
YEKİ
TAMAM

Vator Midi - 21114

Recessed

ALPANI



Semi-recessed fully adjustable spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

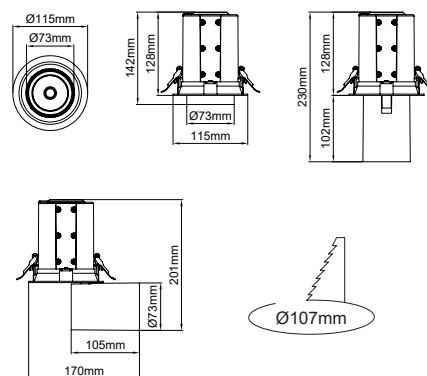

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21114	20W - 2480lm	80	2700	20°	White	On-Off
	15W - 1860lm	90	3000	30°	Black	Dali
	10W - 1240lm		4000	40°	Grey	Wireless
	7W - 868lm		5000		Ral	

*Calculated with CRI80 - 4000K



Vator Mini - 21112

Recessed

ALPANI



Semi-recessed fully adjustable spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

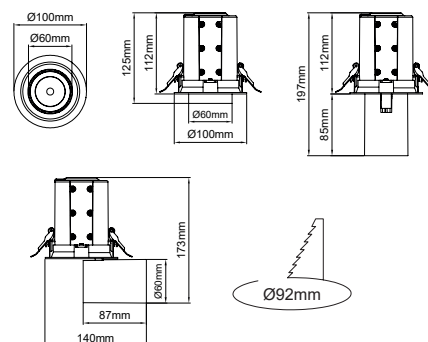

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21112	15W - 1860lm	80	2700	20°	White	On-Off
	10W - 1240lm	90	3000	40°	Black	Dali
	7W - 868lm		4000	60°	Grey	Wireless
	4W - 496lm		5000		Ral	

*Calculated with CRI80 - 4000K

GOLAT

RECESSED



Golat R - 21155

Recessed

ALPANI



Recessed fully adjustable round shape spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution



Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

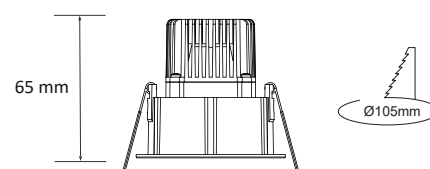

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21155	10W - 1230lm	80	2700	10°	White	On-Off
	8W - 984lm	90	3000	20°	Black	Dali
	5W - 615lm		4000	30°	Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

Golat S - 21156

Recessed

ALPANI



Recessed fully adjustable square shape spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

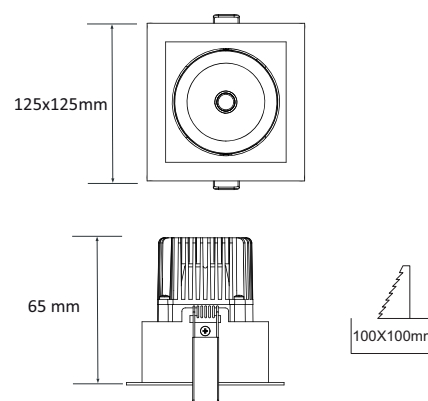

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21156	10W - 1230lm	80	2700	10°	White	On-Off
	8W - 984lm	90	3000	20°	Black	Dali
	5W - 615lm		4000	30°	Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K



TAMPA

RECESSED



Tampa R - 21164

Recessed

ALPANI



Recessed fixed spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution



Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

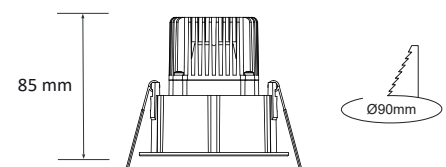

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21164	10W - 1230lm	80	2700	10°	White	On-Off
	8W - 984lm	90	3000	20°	Black	Dali
	5W - 615lm		4000	30°	Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K



Tampa S - 21166

Recessed

ALPANI



Recessed fixed spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

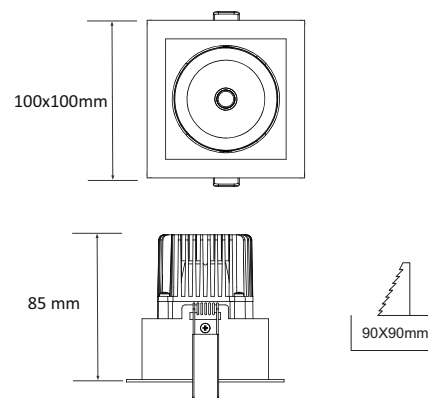

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21166	10W - 1230lm	80	2700	10°	White	On-Off
	8W - 984lm	90	3000	20°	Black	Dali
	5W - 615lm		4000	30°	Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

TRIMNO

RECESSED



Trimno RA - 21173

Recessed

ALPANI



Recessed adjustable trimless spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

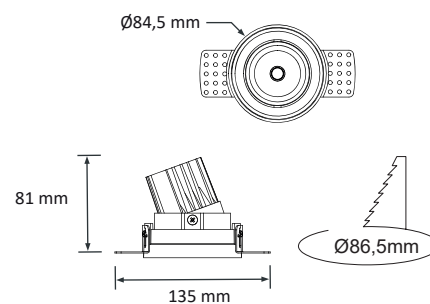

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21173	15W - 1526lm	80	2700	20°	White	On-Off
	10W - 981lm	90	3000	30°	Black	Dali
	7W - 763lm		4000	40°	Grey	
			5000	60°	Ral	

*Calculated with CRI80 - 4000K





Trimno RF - 21174

Recessed

ALPANI



Recessed fixed trimless spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

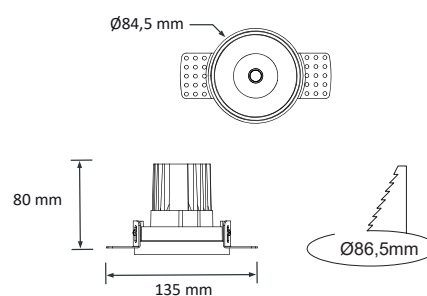

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21174	15W - 1526lm	80	2700	20°	White	On-Off
	10W - 981lm	90	3000	30°	Black	Dali
	7W - 763lm		4000	40°	Grey	
			5000	60°	Ral	

*Calculated with CRI80 - 4000K

Trimno B - 21177

Recessed

ALPANI



Recessed fixed trimless lampholder



Materials

Body made of aluminium

Lampholder

E27

Remarks

Lamp not included


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Bulb Type

Max 20W Led Filament

Technical Drawing

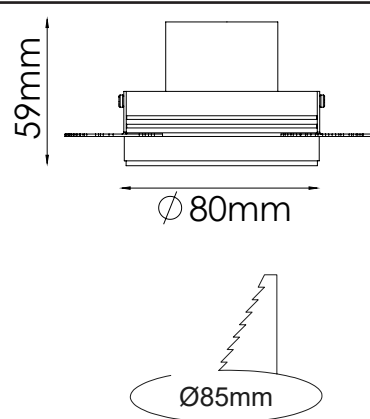

Warranty

All components are provided with 5 year
limited guarantee
A qualified electrician must ensure proper
installation of the product

Installation

Recessed

Code	Power	CRI	Kelvin	Beam Angle	Color	Control
21177	Max 20W Led Filament	-	-	-	White Black Grey Ral	-

FLAR

RECESSED



Flar V10 - 21188

Recessed

ALPANI



Recessed fixed downlight complete with LED module, lens and driver



Materials

Housing & antiglare mask made of aluminium, lens made from PMMA

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
RGBW available on request

Beam Angle

High efficient optic with medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for antiglare mask available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

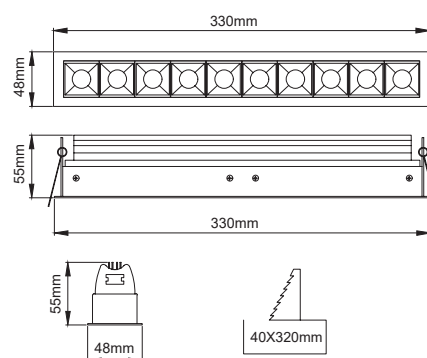

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21188	20W - 2140lm	80	2700	30°	White	On-Off
		90	3000	60°	Black	Dali
			4000		Grey	Wireless
			5000		Ral	

*Calculated with CRI80 - 4000K



Flar V5 - 21186

Recessed

ALPANI



Recessed fixed downlight complete with LED module, lens and driver



Materials

Housing & antiglare mask made of aluminium, lens made from PMMA

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
RGBW available on request

Beam Angle

High efficient optic with medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for antiglare mask available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

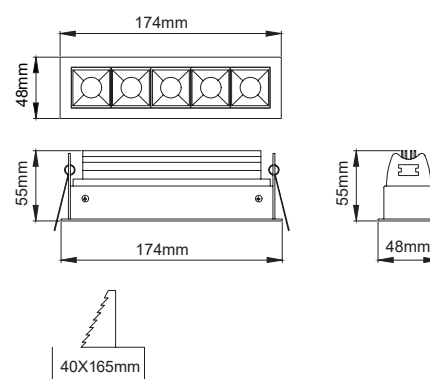

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21186	10W - 1070lm	80	2700	30°	White	On-Off
		90	3000	60°	Black	Dali
			4000		Grey	Wireless
			5000		Ral	

*Calculated with CRI80 - 4000K

Flar V3 - 21184

Recessed

ALPANI



Recessed fixed downlight complete with LED module, lens and driver



Materials

Housing & antiglare mask made of aluminium, lens made from PMMA

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
RGBW available on request

Beam Angle

High efficient optic with medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for antiglare mask available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

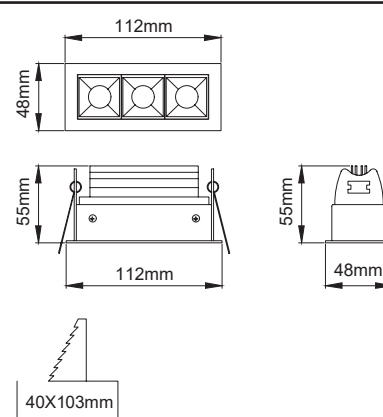

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21184	6W - 642lm	80	2700	30°	White	On-Off
		90	3000	60°	Black	Dali
			4000		Grey	Wireless
			5000		Ral	

*Calculated with CRI80 - 4000K



Flar V2 - 21182

Recessed

ALPANI



Recessed fixed downlight complete with LED module, lens and driver



Materials

Housing & antiglare mask made of aluminium, lens made from PMMA

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
RGBW available on request

Beam Angle

High efficient optic with medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for antiglare mask available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

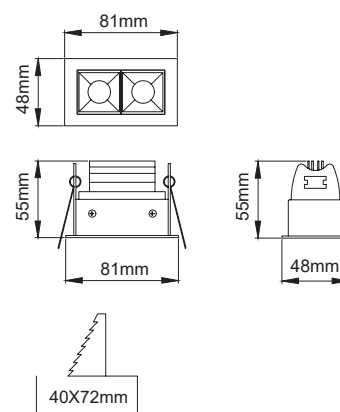

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21182	4W - 428lm	80	2700	30°	White	On-Off
		90	3000	60°	Black	Dali
			4000		Grey	Wireless
			5000		Ral	

*Calculated with CRI80 - 4000K

Flar V1 - 21180

Recessed

ALPANI



Recessed fixed downlight complete with LED module, lens and driver



Materials

Housing & antiglare mask made of aluminium, lens made from PMMA

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
RGBW available on request

Beam Angle

High efficient optic with medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for antiglare mask available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

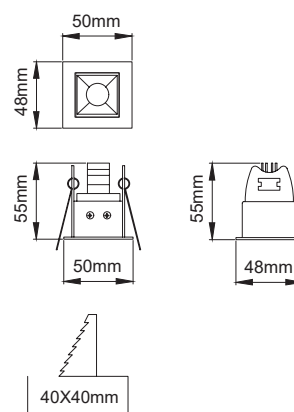

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21180	2W - 214lm	80	2700	30°	White	On-Off
		90	3000	60°	Black	Dali
			4000		Grey	Wireless
			5000		Ral	

*Calculated with CRI80 - 4000K

GALAR

RECESSED



Galar Mega - 21218

Recessed

ALPANI



Recessed fixed downlight complete with LED module, reflector, diffuser and driver

IP20



FIXED
↓

220-240V
50-60Hz

LED

Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

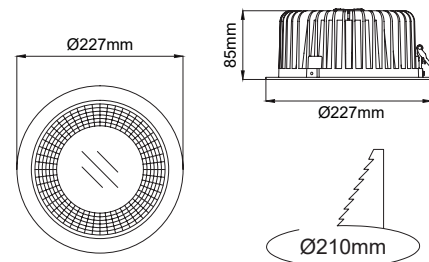

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21218	25W - 2800lm	80	2700	60°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

Galar Maxi - 21217

Recessed

ALPANI



Recessed fixed downlight complete with LED module, reflector, diffuser and driver

IP20



FIXED
↓

220-240V
50-60Hz

LED

Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

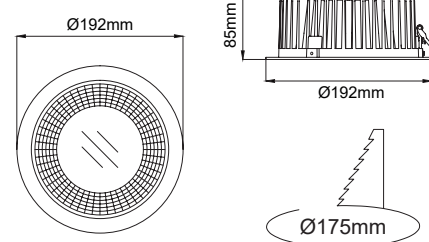

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21217	20W - 2240lm	80	2700	60°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

Galar Midi - 21216

Recessed

ALPANI



Recessed fixed downlight complete with LED module, reflector, diffuser and driver

IP20



FIXED
↓

220-240V
50-60Hz

LED

Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

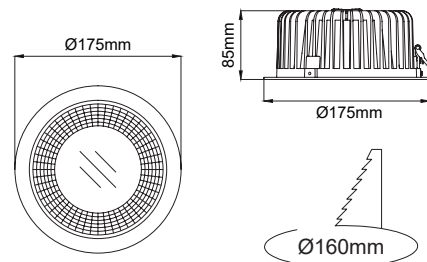

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21216	15W - 1680lm	80	2700	60°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K





Galar Mini - 21215

Recessed

ALPANI



Recessed fixed downlight complete with LED module, reflector, diffuser and driver

IP20



FIXED
↓

220-240V
50-60Hz

LED

Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

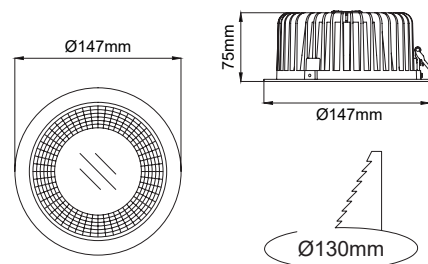

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21215	12W - 1344lm	80	2700	60°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

Galar Micro - 21214

Recessed

ALPANI



Recessed fixed downlight complete with LED module, reflector, diffuser and driver

IP20



FIXED
↓

220-240V
50-60Hz

LED

Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

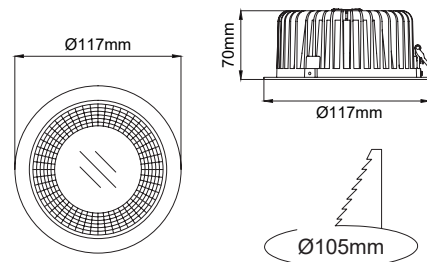

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21214	10W - 1120lm	80	2700	60°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

HERA


RECESSED



Hera Mega - 21208

Recessed

ALPANI

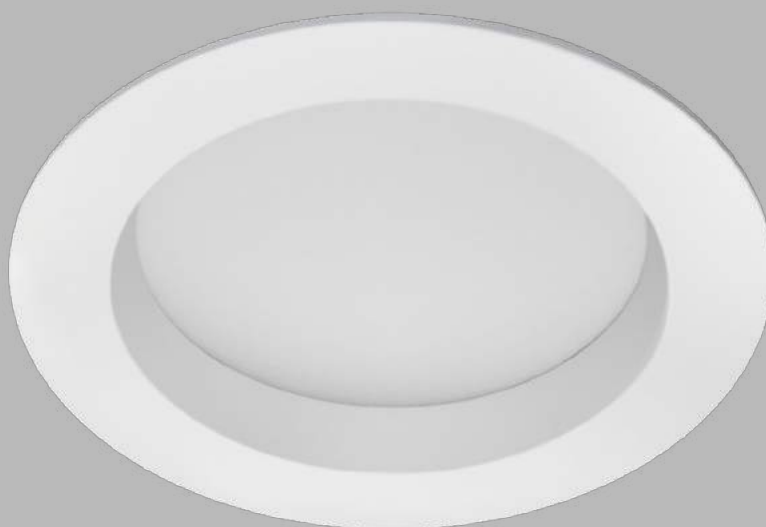

Recessed fixed downlight complete with LED module, diffuser and driver



Materials

Housing made of aluminium, diffuser made from PMMA

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

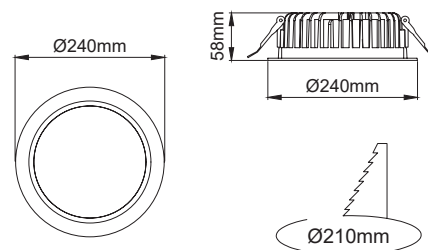

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed


Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21208	30W - 2940lm	80	2700	100°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

Hera Maxi - 21207

Recessed

ALPANI

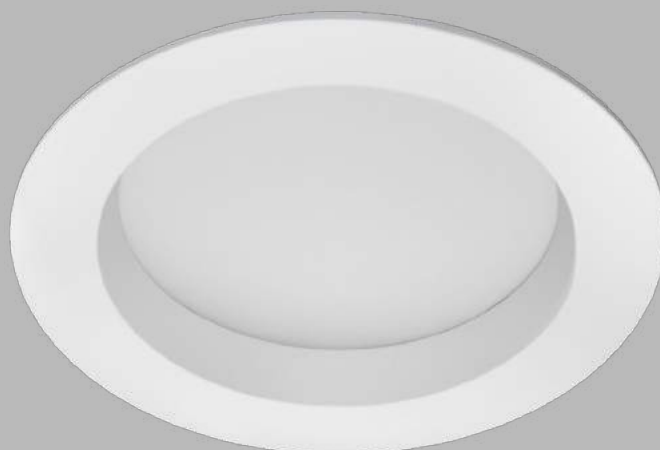

Recessed fixed downlight complete with LED module, diffuser and driver

IP44



FIXED
↓

220-240V
50-60Hz

LED

Materials

Housing made of aluminium, diffuser made from PMMA

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution




Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed


Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21207	25W - 2450lm	80	2700	100°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

Hera Midi - 21206

Recessed

ALPANI

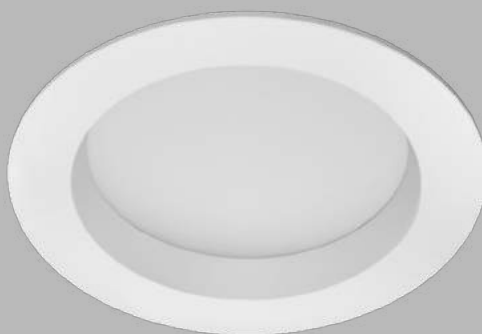

Recessed fixed downlight complete with LED module, diffuser and driver



Materials

Housing made of aluminium, diffuser made from PMMA

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

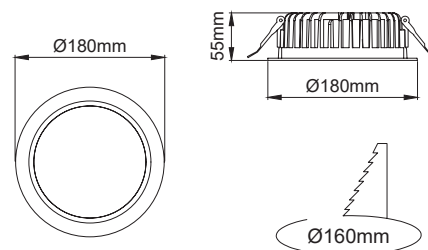

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed


Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21206	18W - 1764lm	80	2700	100°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

Hera Mini - 21205

Recessed

ALPANI

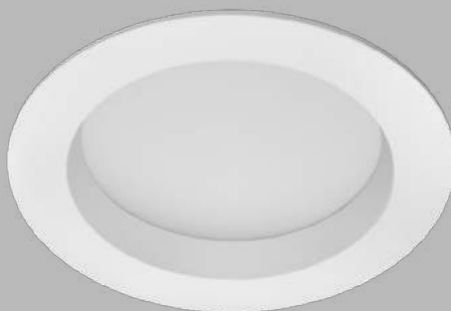

Recessed fixed downlight complete with LED module, diffuser and driver

IP44



FIXED
↓

220-240V
50-60Hz

LED

Materials

Housing made of aluminium, diffuser made from PMMA

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution



Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed


Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21205	15W - 1470lm	80	2700	100°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

Hera Micro - 21204

Recessed

ALPANI



Recessed fixed downlight complete with LED module, diffuser and driver



Materials

Housing made of aluminium, diffuser made from PMMA

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

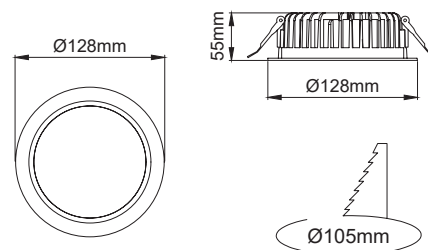

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21204	10W - 980lm	80	2700	100°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

LONIT


RECESSED



Lonit 30x30 - 21233

Recessed

ALPANI

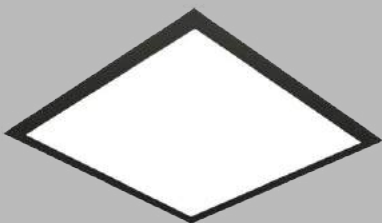

Recessed panel luminaire complete with LED module, diffuser and driver



Materials

Housing made of aluminium, diffuser made from PMMA

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation


Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21233	12W - 1176lm	80	2700	130°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K


Lonit 30x60 - 21234
Recessed

ALPANI

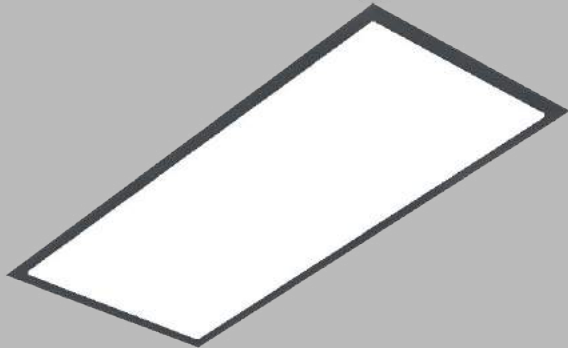

Recessed panel luminaire complete with LED module, diffuser and driver

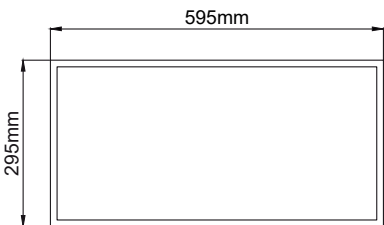

Materials Housing made of aluminium, diffuser made from PMMA	Light Source As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K	Beam Angle Wide flood distribution
Colors As standard; White, Black and Grey Special RAL colours available on request	Operating Conditions Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime	Technical Drawing 
Warranty All components are provided with 5 year limited guarantee A qualified electrician must ensure proper installation of the product	Installation Recessed	

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21234	22W - 2156lm	80	2700	130°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	


*Calculated with CRI80 - 4000K



Lonit 30x120 - 21235

Recessed

ALPANI

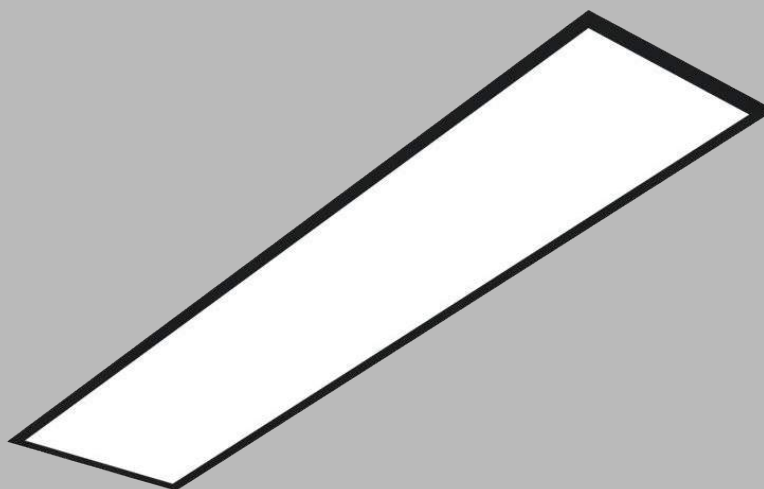

Recessed panel luminaire complete with LED module, diffuser and driver



Materials

Housing made of aluminium, diffuser made from PMMA

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation


Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21235	36W - 3528lm	80	2700	130°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

Lonit 60x60 - 21236
Recessed

ALPANI

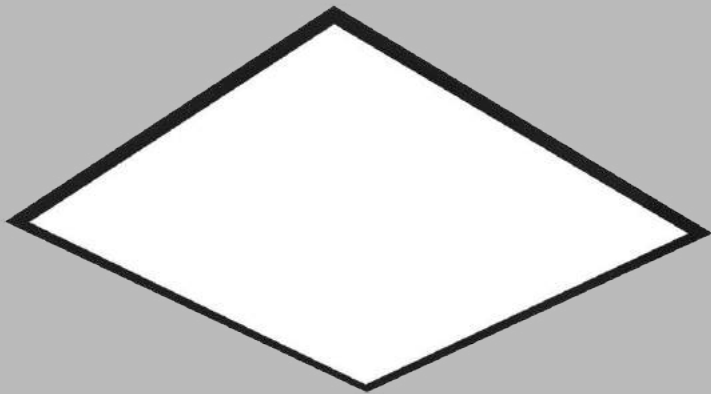

Recessed panel luminaire complete with LED module, diffuser and driver



Materials
Housing made of aluminium, diffuser made from PMMA


Light Source
As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle
Wide flood distribution

Colors
As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions
Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty
All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation
Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21236	36W - 3528lm	80	2700	130°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	


*Calculated with CRI80 - 4000K



Lonit 60x120 - 21237

Recessed

ALPANI

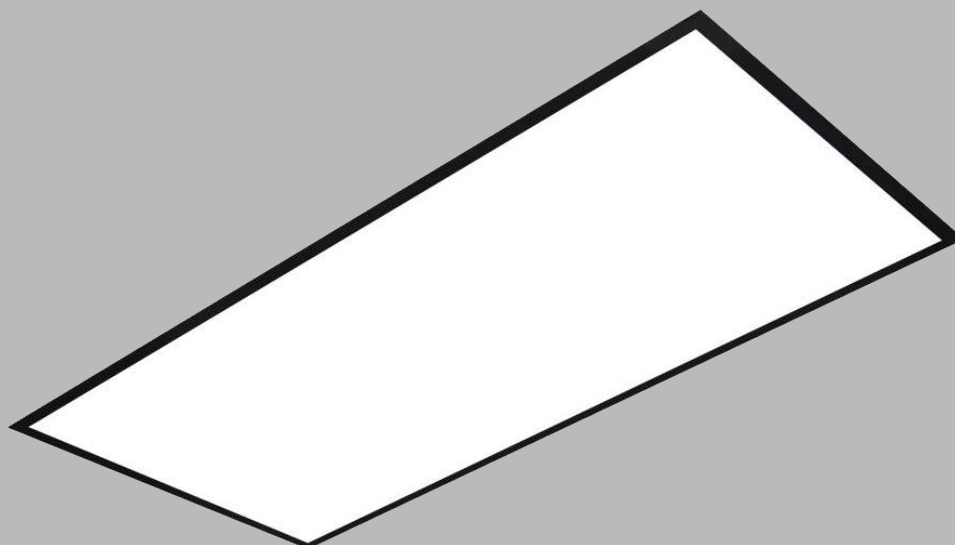

Recessed panel luminaire complete with LED module, diffuser and driver



Materials

Housing made of aluminium, diffuser made from PMMA

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

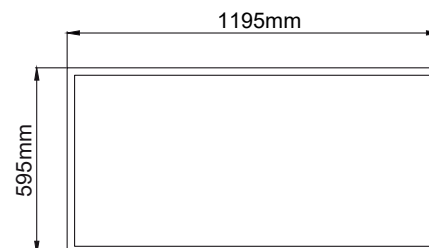

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Recessed

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
21237	70W - 6860lm	80	2700	130°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K




SURFACE / PENDANT

214 LIXENO
220 ARIEN
224 HANT
230 GLATOR
234 STEL
238 LONGE

LIXENO

SURFACE / PENDANT

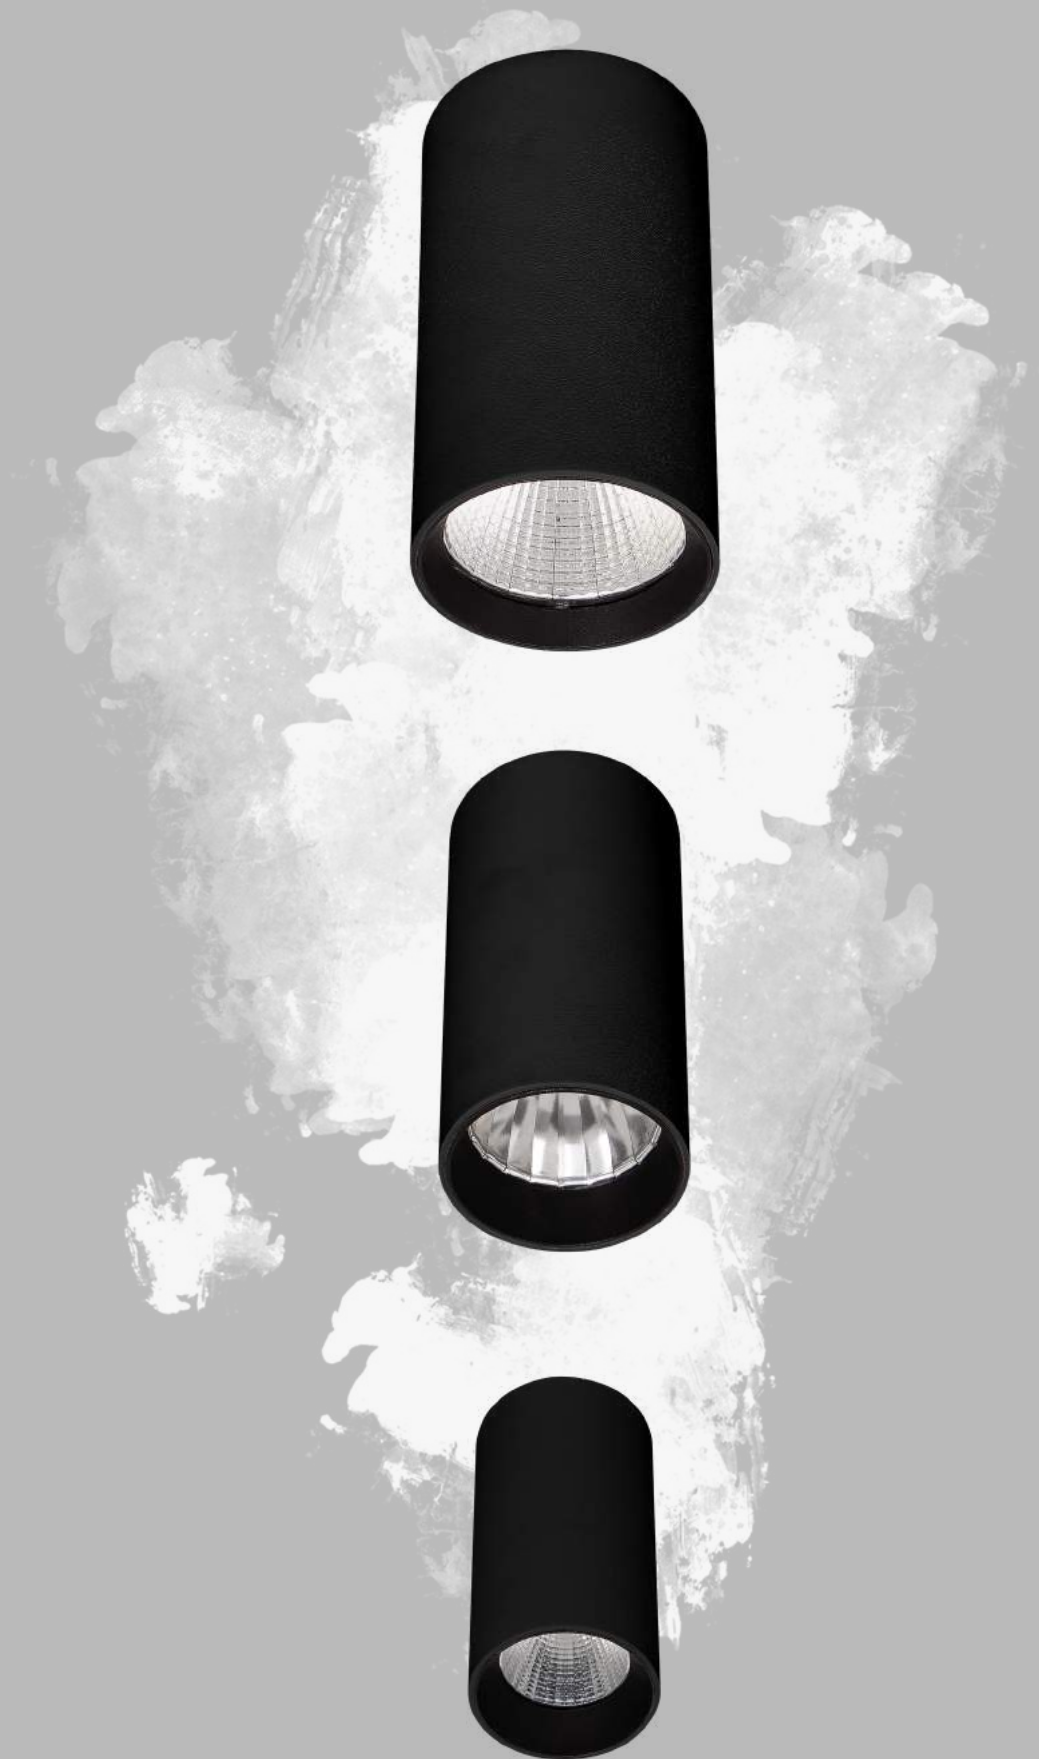

Lixeno Maxi - 33116

Surface / Pendant

ALPANI



Surface / Pendant mounted spotlight complete with LED module, reflector and driver

IP44



FIXED
↓

220-240V
50-60Hz

LED

Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

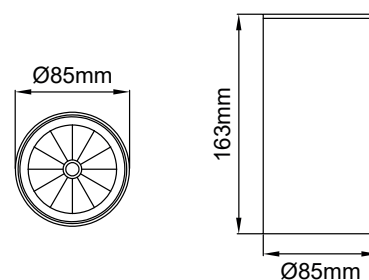

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
33116	28W - 3304lm	80	2700	20°	White	On-Off
	24W - 2832lm	90	3000	35°	Black	Dali
	20W - 2360lm		4000	45°	Grey	
	15W - 1770lm		5000		Ral	

*Calculated with CRI80 - 4000K



Lixeno Midi - 33114

Surface / Pendant

ALPANI



Surface / Pendant mounted spotlight complete with LED module, reflector and driver

IP44



FIXED
↓

220-240V
50-60Hz

LED

Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

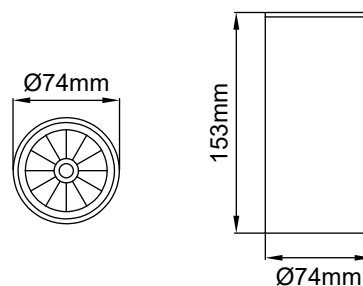

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
33114	20W - 2360lm	80	2700	20°	White	On-Off
	15W - 1770lm	90	3000	35°	Black	Dali
	10W - 1180lm		4000	45°	Grey	
	7W - 826lm		5000		Ral	

*Calculated with CRI80 - 4000K



Lixeno Mini - 33112

Surface / Pendant

ALPANI



Surface / Pendant mounted spotlight complete with LED module, reflector and driver

IP44



FIXED
↓

220-240V
50-60Hz

LED

Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Special solutions for meat, fish and bakery available on request

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
33112	15W - 1770lm	80	2700	20°	White	On-Off
	10W - 1180lm	90	3000	30°	Black	Dali
	7W - 826lm		4000	50°	Grey	
	4W - 472lm		5000		Ral	

*Calculated with CRI80 - 4000K

ARIEN

SURFACE



Arien Maxi - 33136

Surface

ALPANI



Surface mounted spotlight complete with LED module, reflector and driver

IP20



ADJUSTABLE

220-240V
50-60Hz

LED

Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

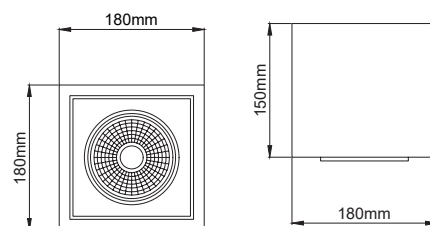

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control	
33136	35W - 4620lm	80	2700	10°	White	On-Off	
	30W - 3960lm	90	3000	20°	Black	Dali	
			4000	30°	Grey		
			5000	40°	Ral		

*Calculated with CRI80 - 4000K

Arien Midi - 33134

Surface

ALPANI



Surface mounted spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

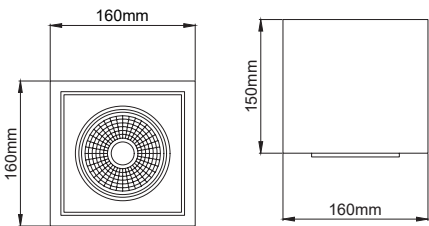

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control	
33134	30W - 3960lm	80	2700	10°	White	On-Off	
	20W - 2640lm	90	3000	20°	Black	Dali	
			4000	30°	Grey		
			5000	40°	Ral		

*Calculated with CRI80 - 4000K

Arien Mini - 33132

Surface

ALPANI



Surface mounted spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

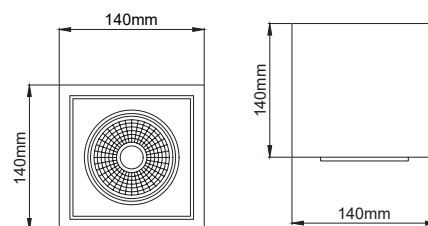

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
33132	20W - 2640lm	80	2700	10°	White	On-Off
	15W - 1980lm	90	3000	20°	Black	Dali
			4000	30°	Grey	
			5000	40°	Ral	

*Calculated with CRI80 - 4000K

HANT

SURFACE



Hant Maxi - 33147

Surface

ALPANI



Surface mounted spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

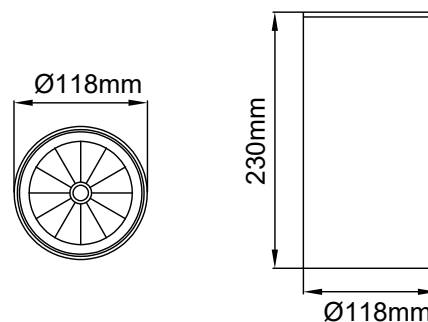

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
33147	35W - 4620lm	80	2700	10°	White	On-Off
	30W - 3960lm	90	3000	20°	Black	Dali
			4000	30°	Grey	
			5000	40°	Ral	

*Calculated with CRI80 - 4000K



09

ROOM
10-12



Hant Midi - 33145

Surface

ALPANI



Surface mounted spotlight complete with LED module, reflector and driver

IP20



FIXED
↓

220-240V
50-60Hz

LED

Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

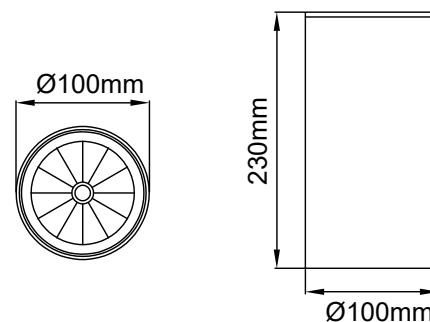

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
33145	30W - 3960lm	80	2700	10°	White	On-Off
	20W - 2640lm	90	3000	20°	Black	Dali
			4000	30°	Grey	
			5000	40°	Ral	

*Calculated with CRI80 - 4000K



Hant Mini - 33143

Surface

ALPANI



Surface mounted spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

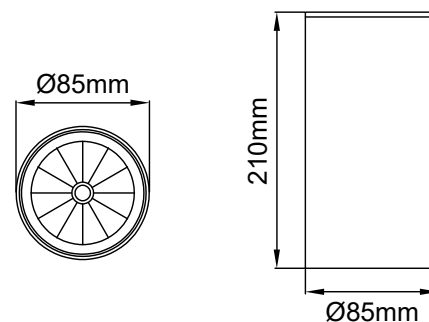

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
33143	20W - 2640lm	80	2700	10°	White	On-Off
	15W - 1980lm	90	3000	20°	Black	Dali
			4000	30°	Grey	
			5000	40°	Ral	

*Calculated with CRI80 - 4000K

GLATOR

SURFACE



Glator Maxi - 33107

Surface

ALPANI



Surface mounted spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

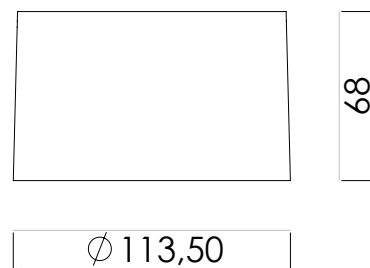

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
33107	18W - 2550lm	80	2700	24°	White	On-Off
		90	3000	34°	Black	Dali
			4000	48°	Grey	Wireless
			5000		Ral	

*Calculated with CRI80 - 4000K

Glator Midi - 33105

Surface

ALPANI



Surface mounted spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

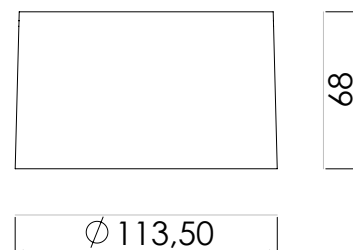

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
33105	12W - 1700lm	80	2700	24°	White	On-Off
		90	3000	34°	Black	Dali
			4000	48°	Grey	Wireless
			5000		Ral	

*Calculated with CRI80 - 4000K

Glator Mini - 33103

Surface

ALPANI



Surface mounted spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request
Different color options for front ring available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
33103	6W - 850lm	80	2700	24°	White	On-Off
		90	3000	34°	Black	Dali
			4000	48°	Grey	Wireless
			5000		Ral	

*Calculated with CRI80 - 4000K

STEL

SURFACE



Stel R - 33156

Surface

ALPANI



Surface mounted spotlight complete with LED module, reflector and driver

IP20



FIXED
↓

220-240V
50-60Hz

LED

Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

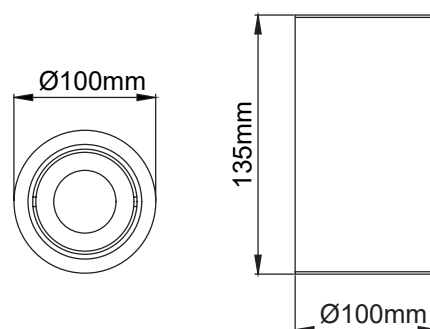

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
33156	10W - 1230lm	80	2700	10°	White	On-Off
	8W - 984lm	90	3000	20°	Black	Dali
	5W - 615lm		4000	30°	Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K



Stel S - 33154

Surface

ALPANI



Surface mounted spotlight complete with LED module, reflector and driver



Materials

Housing & reflector made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

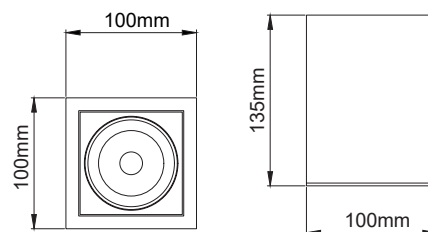

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
33154	10W - 1230lm	80	2700	10°	White	On-Off
	8W - 984lm	90	3000	20°	Black	Dali
	5W - 615lm		4000	30°	Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

LONGE

SURFACE / PENDANT



Longe 30x30 - 33233

Surface / Pendant

ALPANI



Surface / Pendant panel luminaire complete with LED module, diffuser and driver

IP20



FIXED
↓

220-240V
50-60Hz

LED

Materials

Housing made of aluminium, diffuser made from PMMA

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
33233	12W - 1176lm	80	2700	130°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

Longe 30x60 - 33234

Surface / Pendant

ALPANI



Surface / Pendant panel luminaire complete with LED module, diffuser and driver

IP20



FIXED
↓

220-240V
50-60Hz

LED

Materials

Housing made of aluminium, diffuser made from PMMA

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

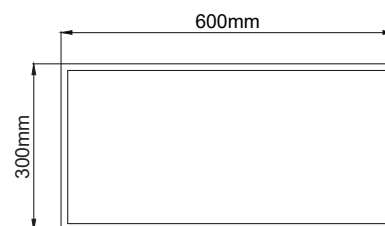

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant


Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
33234	22W - 2156lm	80	2700	130°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

Longe 30x120 - 33235

Surface / Pendant

ALPANI

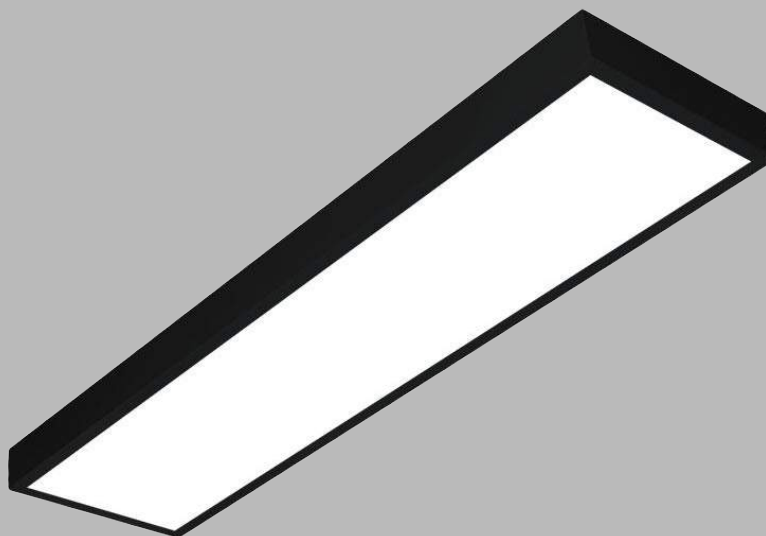

Surface / Pendant panel luminaire complete with LED module, diffuser and driver



Materials

Housing made of aluminium, diffuser made from PMMA

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
33235	36W - 3528lm	80	2700	130°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K



THE TWINKLE
IN A STAR, ★
WISHED FOR YOU
AND
ALL YOU ARE




Bir zamanlar küçük bir Frida
vardı. Sağlığı tuhaftu.
1 kelime 12 hece
1 kelime 2 kelime 0 hece
AA AID



Longe 60x60 - 33236

Surface / Pendant

ALPANI

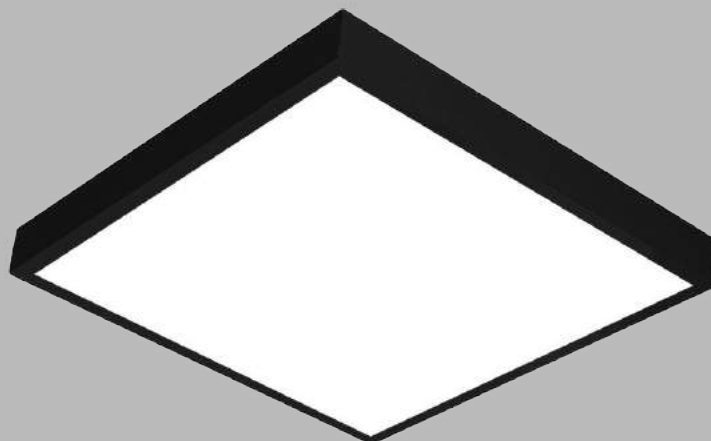

Surface / Pendant panel luminaire complete with LED module, diffuser and driver

IP20



FIXED
↓

220-240V
50-60Hz

LED

Materials

Housing made of aluminium, diffuser made from PMMA

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant


Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
33236	36W - 3528lm	80	2700	130°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

Longe 60x120 - 33237

Surface / Pendant

ALPANI

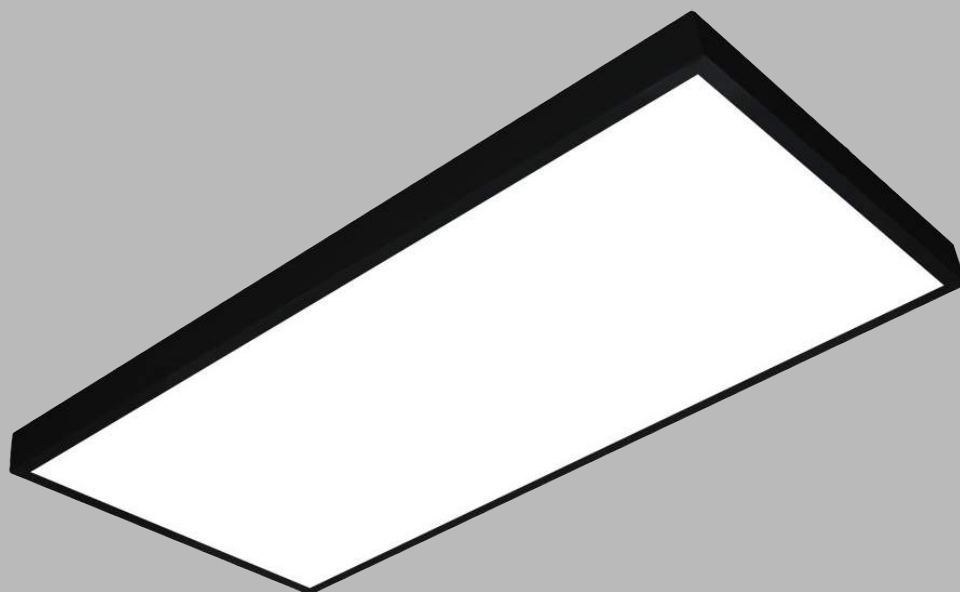

Surface / Pendant panel luminaire complete with LED module, diffuser and driver



Materials

Housing made of aluminium, diffuser made from PMMA

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

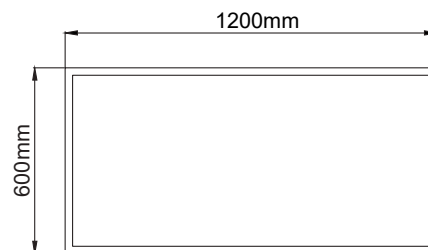

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
33237	70W - 6860lm	80	2700	130°	White	On-Off
		90	3000		Black	Dali
			4000		Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

The background is a high-contrast, black and white abstract composition. It features heavy, expressive black brushstrokes and splatters that create a sense of depth and texture. These dark elements are set against a lighter, more chaotic background of white and grey, which also shows signs of being painted or splattered. The overall effect is one of raw, gestural energy.

WALL / GROUND

248 PERMO


254 BATT

256 TOME

258 KELON

PERMO


WALL

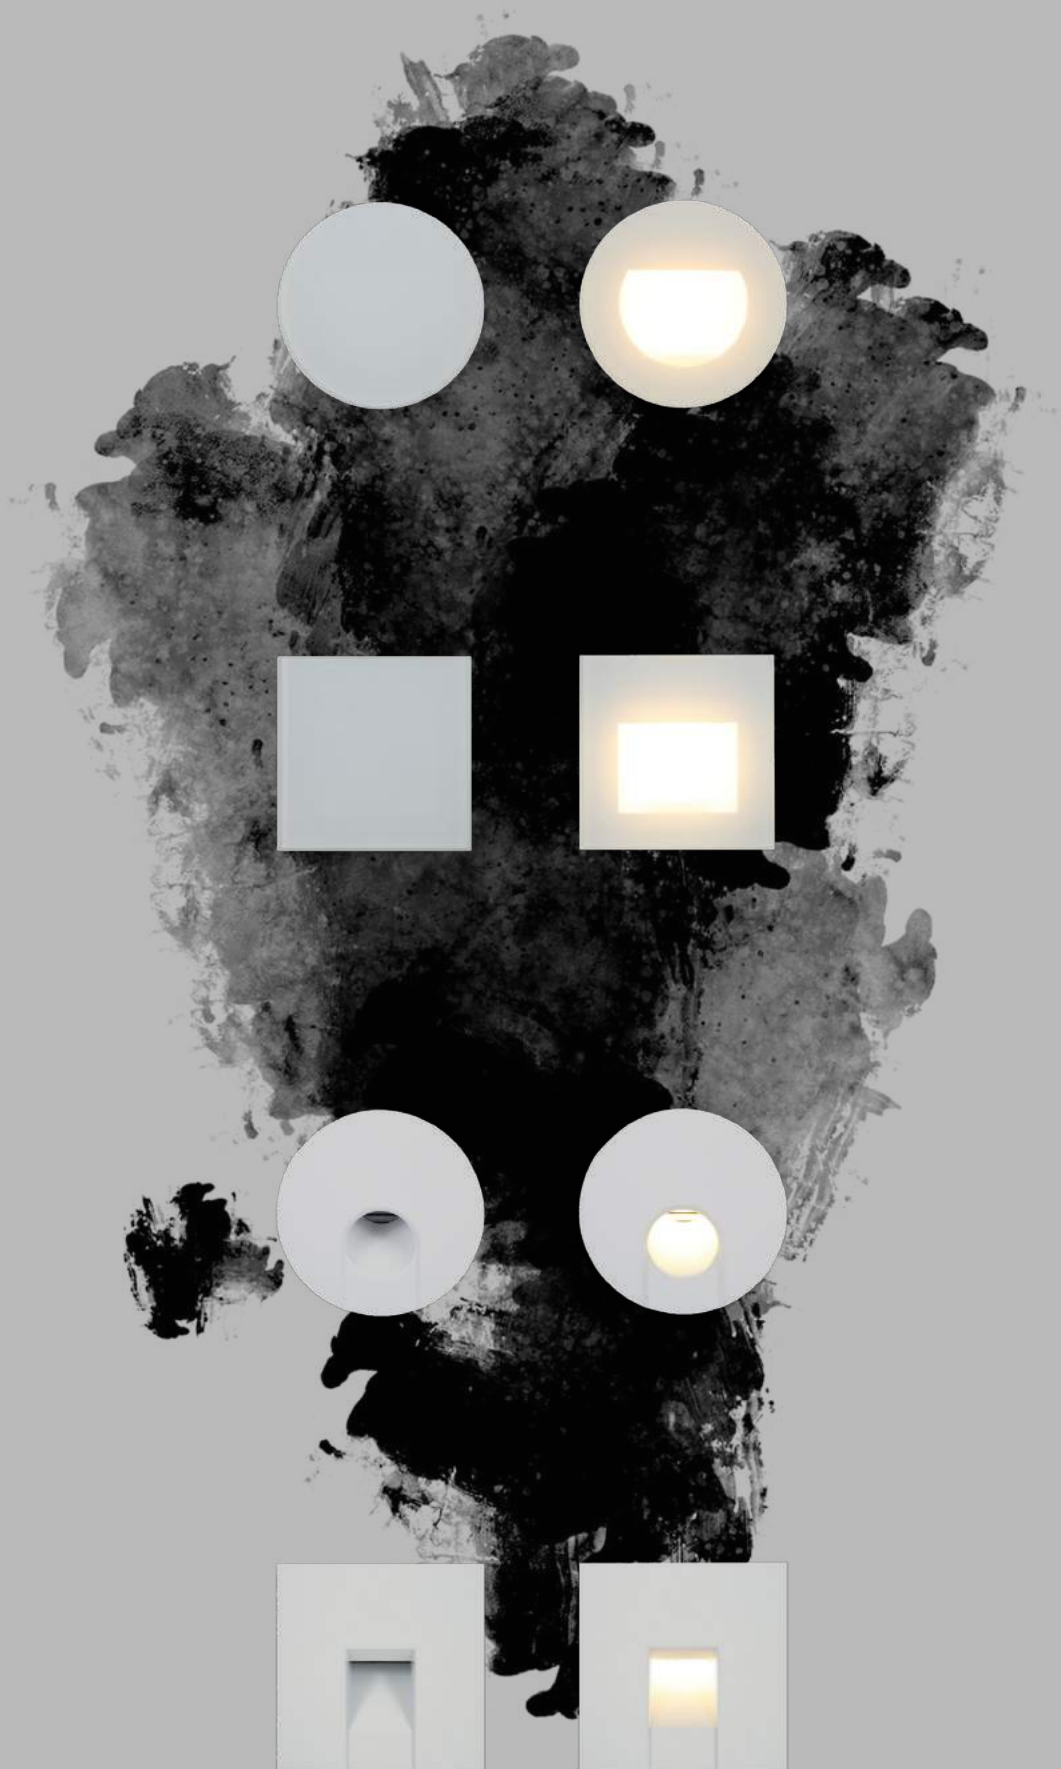

Permo Glass R - 25102

Wall

ALPANI

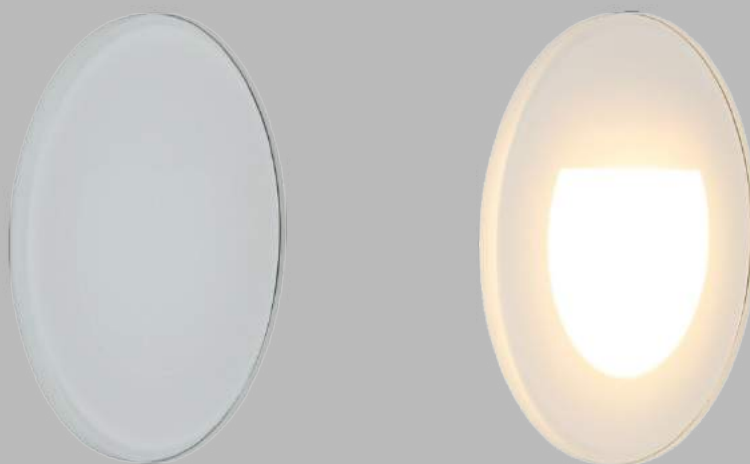

Wall mounted luminaire complete with LED module and driver



Materials

Housing made of aluminium, frame made of glass

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Indirect light distribution


Colors

Not available

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

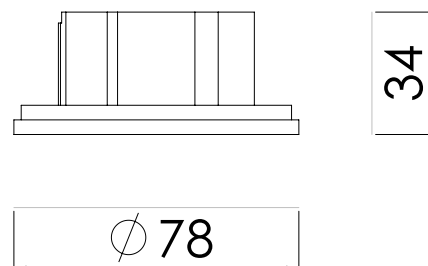

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Wall


Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
25102	2W - 210lm	80	2700	Indirect	Not available	On-Off
		90	3000			
			4000			

*Calculated with CRI80 - 4000K

Permo Glass S - 25103

Wall

ALPANI

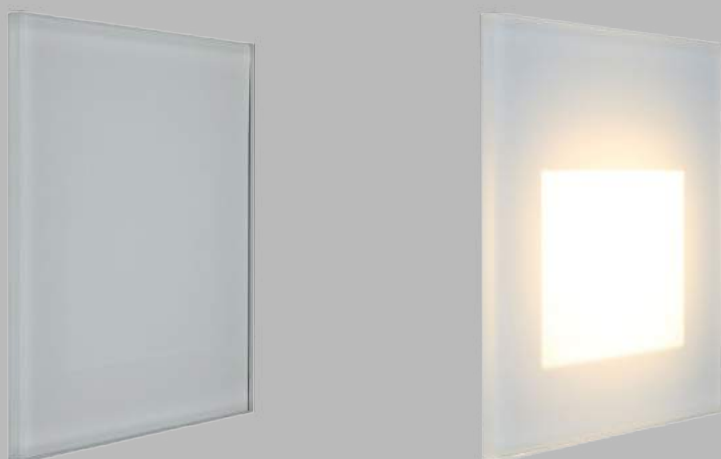

Wall mounted luminaire complete with LED module and driver



Materials

Housing made of aluminium, frame made of glass

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Indirect light distribution


Colors

Not available

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

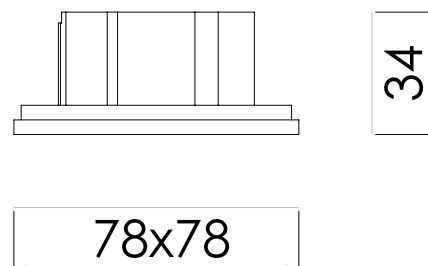

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Wall

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
25103	2W - 210lm	80	2700	Indirect	Not available	On-Off
		90	3000			
			4000			

*Calculated with CRI80 - 4000K



Permo Metal R - 25104

Wall

ALPANI



Wall mounted luminaire complete with LED module and driver



Materials

Housing made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Indirect light distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

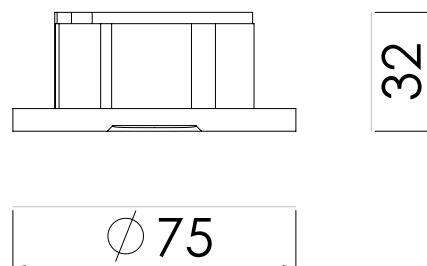

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Wall

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
25104	2W - 210lm	80	2700	Indirect	White	On-Off
		90	3000		Black	
			4000		Grey	

*Calculated with CRI80 - 4000K

Permo Metal S - 25105

Wall

ALPANI



Wall mounted luminaire complete with LED module and driver



Materials

Housing made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Indirect light distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

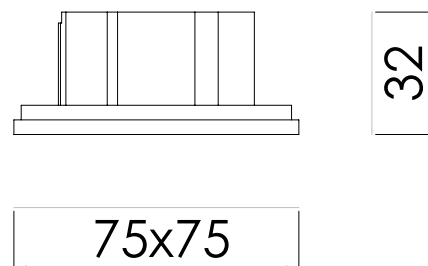

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Wall

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
25105	2W - 210lm	80	2700	Indirect	White	On-Off
		90	3000		Black	
			4000		Grey	

*Calculated with CRI80 - 4000K

BATT

WALL



Batt - 35103

Wall

ALPANI



Wall mounted luminaire complete with LED module and driver



Materials

Extruded opal polycarbonate body

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

Wide flood distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

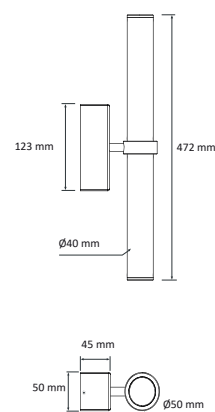

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Wall

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
35103	7W - 620lm	80	2700	160°	White	On-Off
		90	3000		Black	
			4000		Grey	

*Calculated with CRI80 - 4000K

TOME

WALL



Tome - 35107

Wall

ALPANI



Wall mounted luminaire complete with LED module and driver



Materials

Housing made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

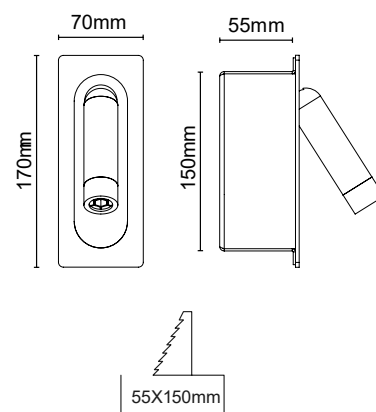

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Wall

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
35107	2W - 250lm	80	2700	30°	White	On-Off
	1W - 140lm	90	3000	40°	Black	
			4000		Grey	
					Ral	

*Calculated with CRI80 - 4000K

KELON


GROUND



Kelon Midi R - 26106

Ground

ALPANI

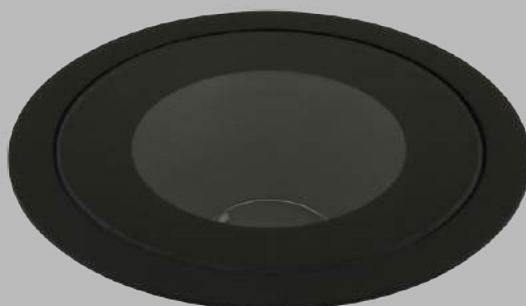

Ground mounted luminaire complete with LED module and driver



Materials

Housing made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

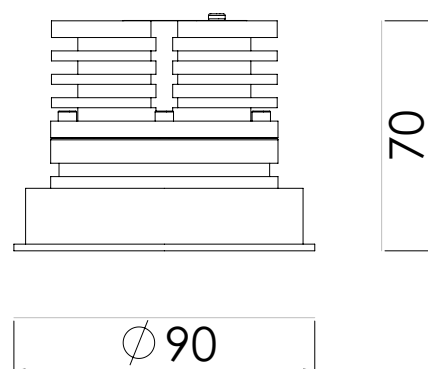

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Ground

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
26106	9W - 855lm	80	2700	20°	White	On-Off
	7W - 665lm	90	3000	30°	Black	
			4000	50°	Grey	
			5000		Ral	

*Calculated with CRI80 - 4000K

Kelon Midi S - 26105

Ground

ALPANI



Ground mounted luminaire complete with LED module and driver



Materials

Housing made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

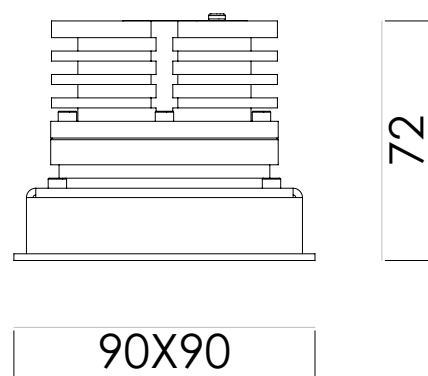

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Ground

Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
26105	9W - 855lm	80	2700	20°	White	On-Off
	7W - 665lm	90	3000	30°	Black	
			4000	50°	Grey	
			5000		Ral	


*Calculated with CRI80 - 4000K



Kelon Mini R - 26104

Ground

ALPANI

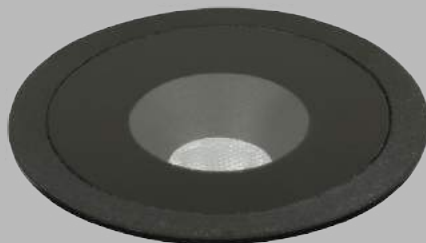

Ground mounted luminaire complete with LED module and driver



Materials

Housing made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

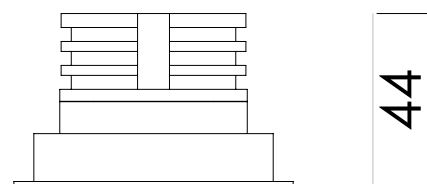

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Ground



Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
26104	3W - 285lm	80	2700	10°	White	On-Off
	2W - 190lm	90	3000	20°	Black	
	1W - 95lm		4000	30°	Grey	
			5000	50°	Ral	

*Calculated with CRI80 - 4000K

Kelon Mini S - 26103

Ground

ALPANI



Ground mounted luminaire complete with LED module and driver



Materials

Housing made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K

Beam Angle

High efficient optic with narrow, medium and wide distribution


Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing

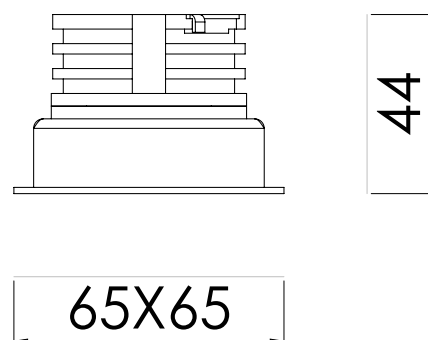

Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation


Ground


Code	Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
26103	3W - 285lm	80	2700	10°	White	On-Off
	2W - 190lm	90	3000	20°	Black	
	1W - 95lm		4000	30°	Grey	
			5000	50°	Ral	

*Calculated with CRI80 - 4000K


ALPANI

DIS TICARET LIMITED SIRKETI

 Sinanoba Mah. Ibrahimzade Cad. No: 1B/35
34535 Buyukcekmece, Istanbul - Turkey

 +90 542 515 87 85

 info@alpani.com

 www.alpani.com

ALPANI

ALPANI
DIS TICARET LIMITED SİRKETİ

Sinanoba Mah. İbrahimzade Cad. No: 1B/35
34535 Büyükçekmece, İstanbul - Turkey

+90 542 515 87 85

info@alpani.com

www.alpani.com