


ALTARIO

PROFILES



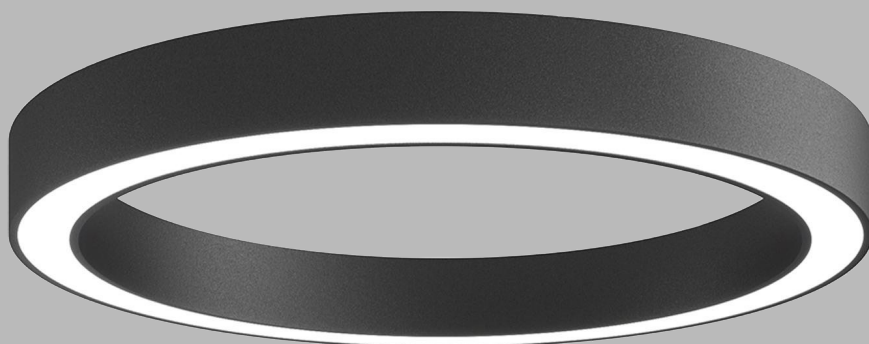

Surface / Pendant luminaire with direct / indirect option complete with LED boards, opal diffuser and driver. Custom diameters are available on request



Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Tunable White available on request

Beam Angle

Wide flood distribution



Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Size - Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32127	Ø450 - 32W - 2770lm	80	2700	110°	White	On-Off
	Ø750 - 54W - 4610lm	90	3000		Black	Dali
	Ø1000 - 72W - 6140lm		4000		Grey	
	Ø1500 - 108W - 9210lm		5000		Ral	
	Ø2000 - 144W - 12280lm					

*Calculated with CRI80 - 4000K






Altario V8 - 32125

Profiles

ALPANI

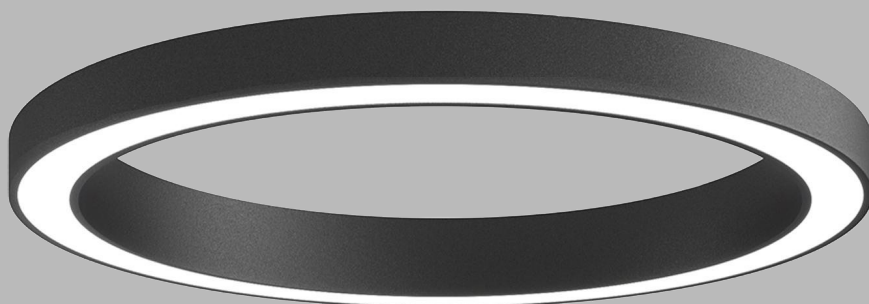

Surface / Pendant luminaire with direct / indirect option complete with LED boards, opal diffuser and driver. Custom diameters are available on request

IP20



FIXED
↓

220-240V
50-60Hz

LED

Materials

Profile made of aluminium

Light Source

As standard; CRI80 and CRI90 in 2700, 3000, 4000 and 5000K
Tunable White available on request

Beam Angle

Wide flood distribution



Colors

As standard; White, Black and Grey
Special RAL colours available on request

Operating Conditions

Designed with best possible shape to provide optimal heat dissipation both on LED and Driver to ensure long lifetime

Technical Drawing



Warranty

All components are provided with 5 year limited guarantee
A qualified electrician must ensure proper installation of the product

Installation

Surface / Pendant

Code	Size - Power - Lumen*	CRI	Kelvin	Beam Angle	Color	Control
32125	Ø450 - 32W - 2930lm	80	2700	110°	White	On-Off
	Ø750 - 54W - 4880lm	90	3000		Black	Dali
	Ø1000 - 72W - 6500lm		4000		Grey	
	Ø1500 - 108W - 9750lm		5000		Ral	
	Ø2000 - 144W - 13000lm					

*Calculated with CRI80 - 4000K

